


## TABLE OF CONTENTS

ASSEMBLY OVERVIEW	2
FRAME OVERVIEW	2
RISER/KICKPLATE	3
CONDENSED FRAME - 61"	4
FRAME HEIGHT ADJUSTMENT	5
FRAME ASSEMBLY	6
CONDENSED BACK PANEL KIT	7
CONDENSED LOW PROFILE 2' BACK DECOR PANEL KIT	8
CONDENSED SIDE PANEL KIT	9
HIGH PROFILE BACK PANEL KIT	10
HIGH PROFILE 2' BACK DECOR PANEL KIT	11
HIGH PROFILE SIDE PANEL ADD-ON KIT	12
ANCHORING	13
POWER MANAGEMENT OVERVIEW	15
POWER MANAGEMENT KIT	15
HEADER SUPPORT ARM	16
LED FLIP UP HEADER KIT	16
HEADER INSTALLATION	18
STORAGE DRAWER	19
TELESPANNER BRACKET	20
SHELF INSTALLATION	20
STORAGE SHELF BACKER	21
SHELF MOLDING	22
SHELF CONNECTOR KITS	22
PLANOGRAM CUSTOMIZATIONS	23
TOP PANEL KIT	24
BLOCKOUT DOOR KIT	25
INVENTORY COUNTING STICK	26



# TELESCOPING DISPLAY ASSEMBLY INSTRUCTIONS 61" CONDENSED - 88" HIGH PROFILE

**NOTE: Set specific Planograms have important information about shelf types, quantities, locations.**




## INSTALLATION VIDEOS






# ASSEMBLY OVERVIEW


## TOOLS REQUIRED:

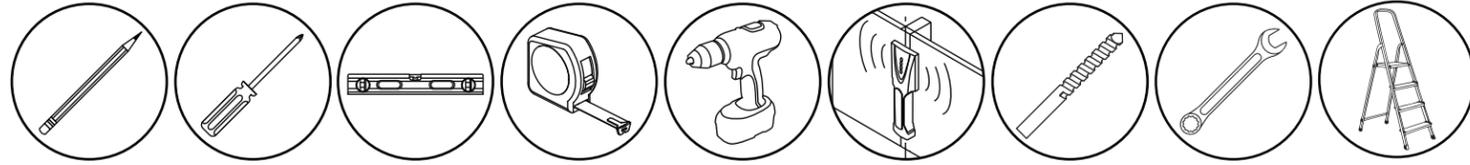

- 1 Measure available space. Confirm width of set to ensure equipment will fit.
- 2 Inspect pallet for damage.
- 3 Remove and stack all boxes in groups of same items. Check quantity against packing slip. Only open cartons as required. Items are packed on skid in most efficient way. Frame cartons contain other cartons within.

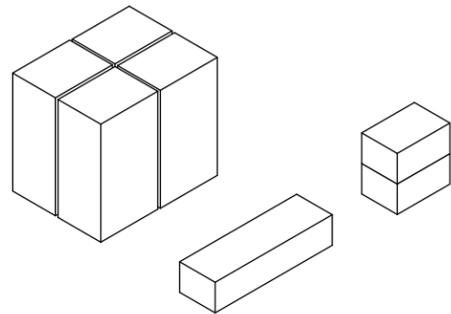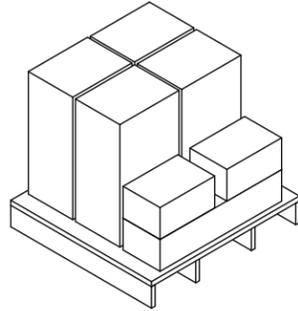

- 4 Open white box(es) labeled "Open First". This carton(s) contains items required to assemble the frame.
- 5 Brackets and hardware to assemble the frame are found within the white envelope.

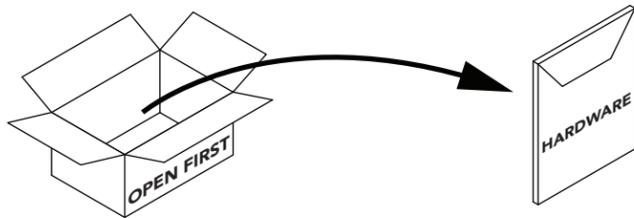


## CONTINUOUS SET WIDTH CHART

Continuous Store Set Width	Store Set Width	Store Set Width with Side Panels
1ft	13"	13.5"
2ft	24.5"	25"
3ft	36"	36.5"
4ft	47.5"	48"
5ft	59"	59.5"
6ft	70.5"	71"
7ft	82"	82.5"
8ft	93.5"	94"
9ft	105"	105.5"
10ft	116.5"	117"
11ft	128"	128.5"
12ft	139.5"	140"
13ft	151"	151.5"
14ft	162.5"	163"

# FRAME OVERVIEW

**NOTE:** Most store sets come with connector kits.  
**Connector kits need to be installed between each frame.**

The sequence in which the frames are laid out is not important.  
 Once assembled with connectors, the set is continuous.

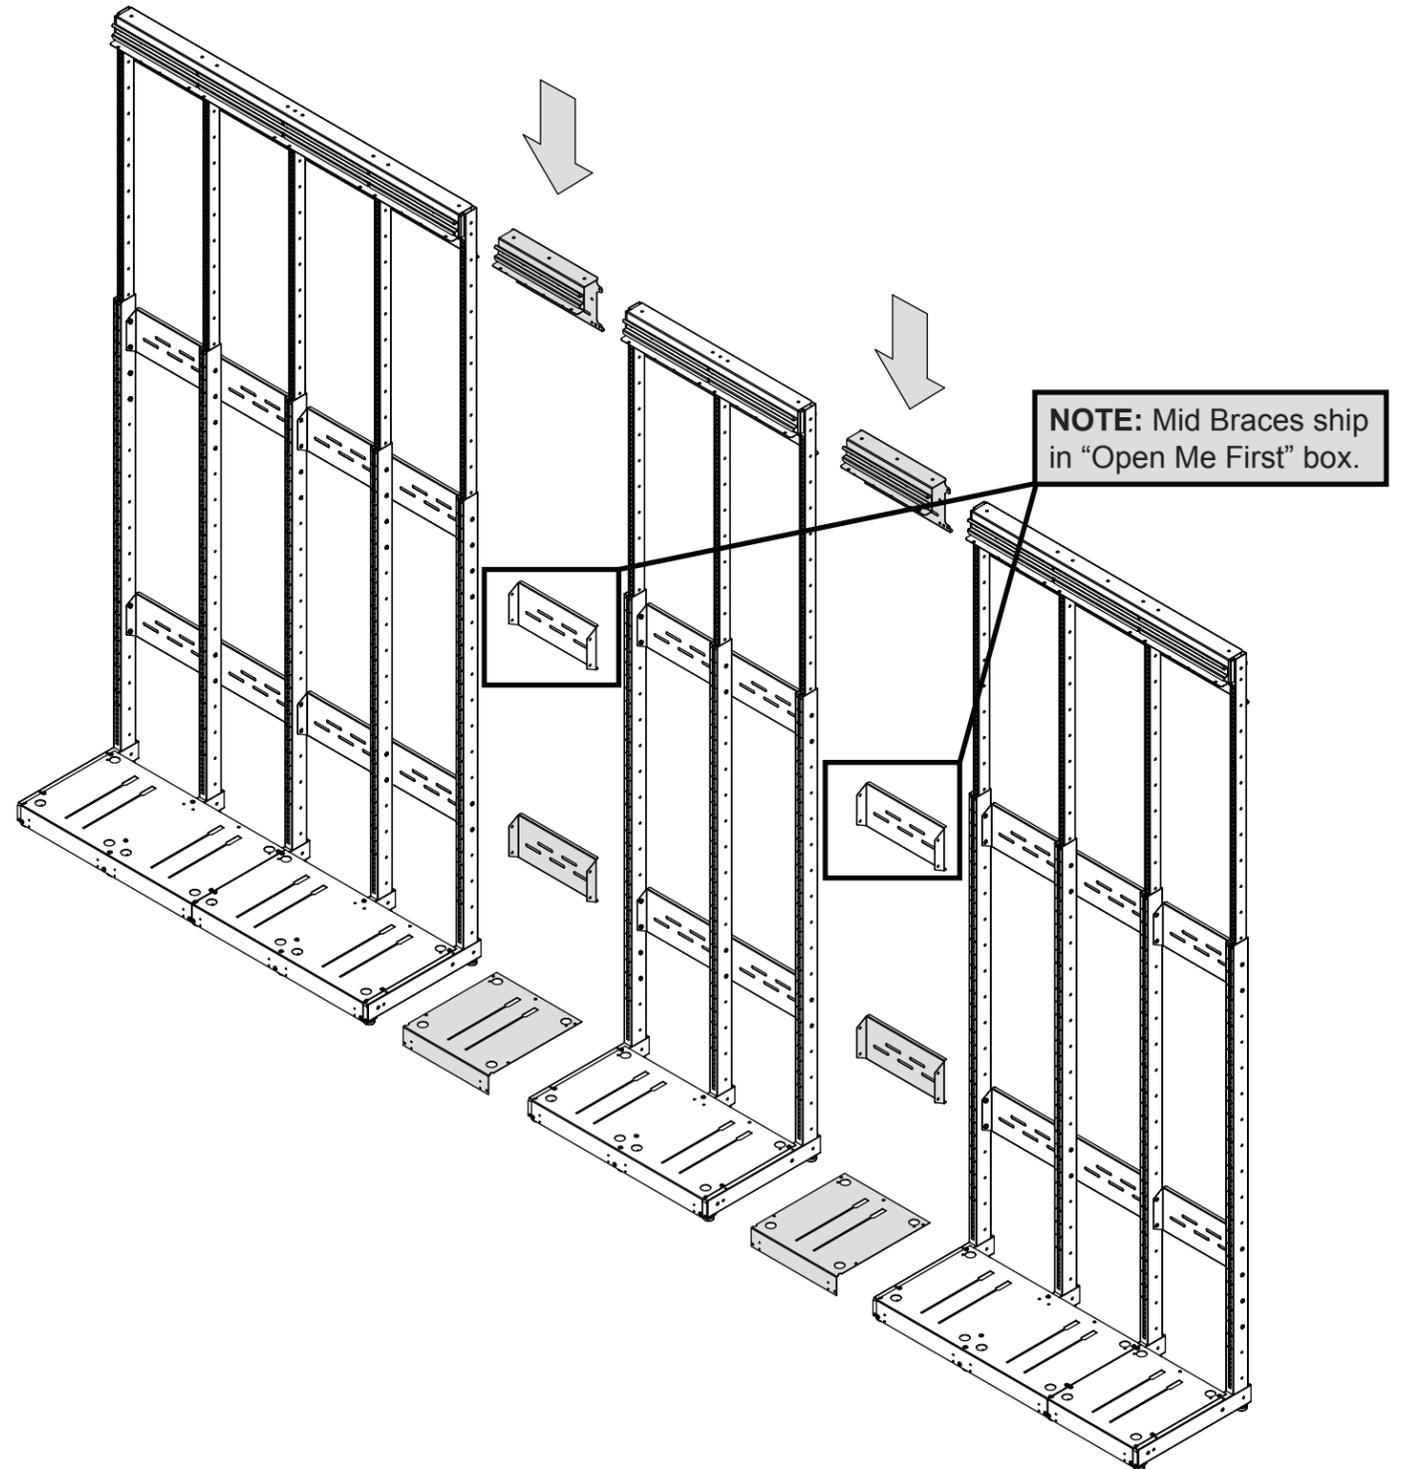

# RISER/KICKPLATE




IF SET DOES NOT REQUIRE  
RISER/KICKPLATE, THEN GO TO PAGE 4,  
CONDENSED FRAME.

★ACCESSORY★


RISER : ITEM# 30256  
1FT KICKPLATE KIT : ITEM# 30231  
2FT KICKPLATE KIT : ITEM# 30232

Contents:

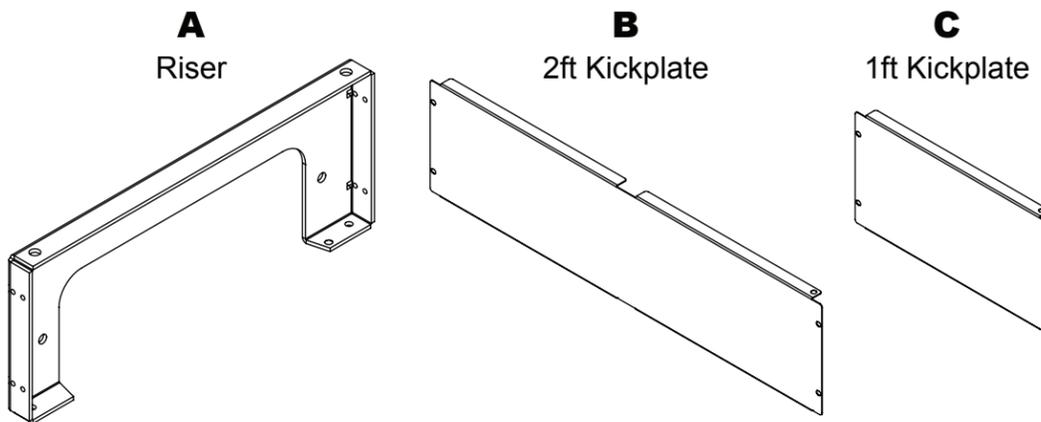

Item# 37035:  
Riser Hardware Kit

**D**  
(2) 5/16" x 1/2" Bolt




Item# 37040:  
Kick Plate Hardware Kit

**E**  
(5) #10 x 1/2" Screw




**2** Install Levelers onto Riser (A) as shown.

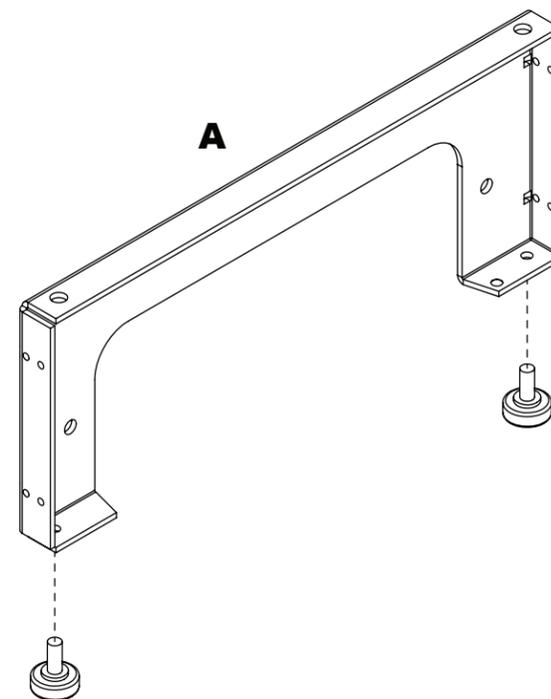


Topside View

**3** Secure Riser (A) to Frame with 5/16" x 1/2" Bolts (D).

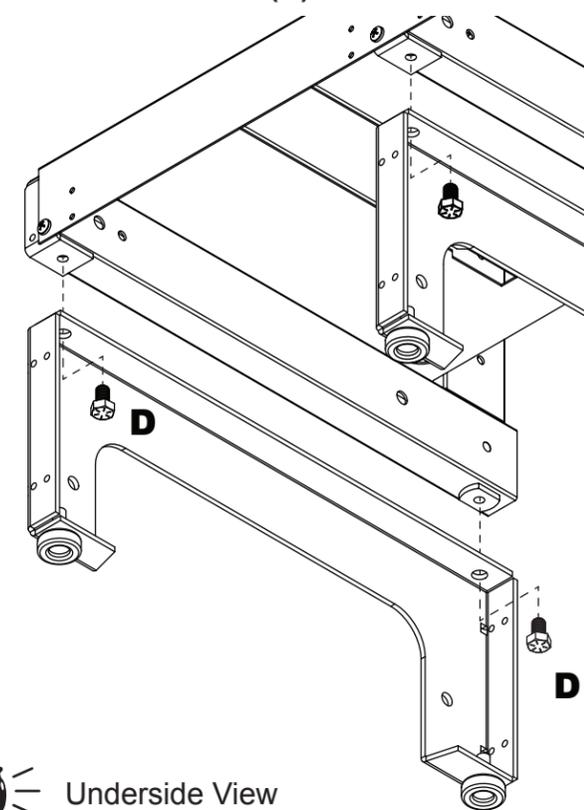


Underside View

**1** Remove Levelers from Frame.

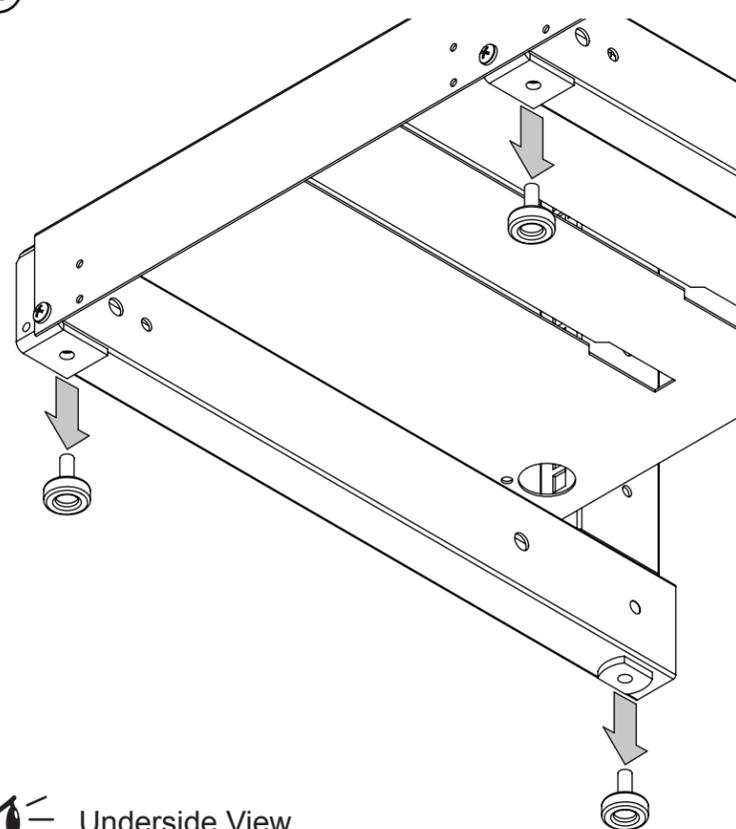

Underside View

**4** Secure Kickplate (B or C) to Riser with #10 x 1/2" Screws (E).

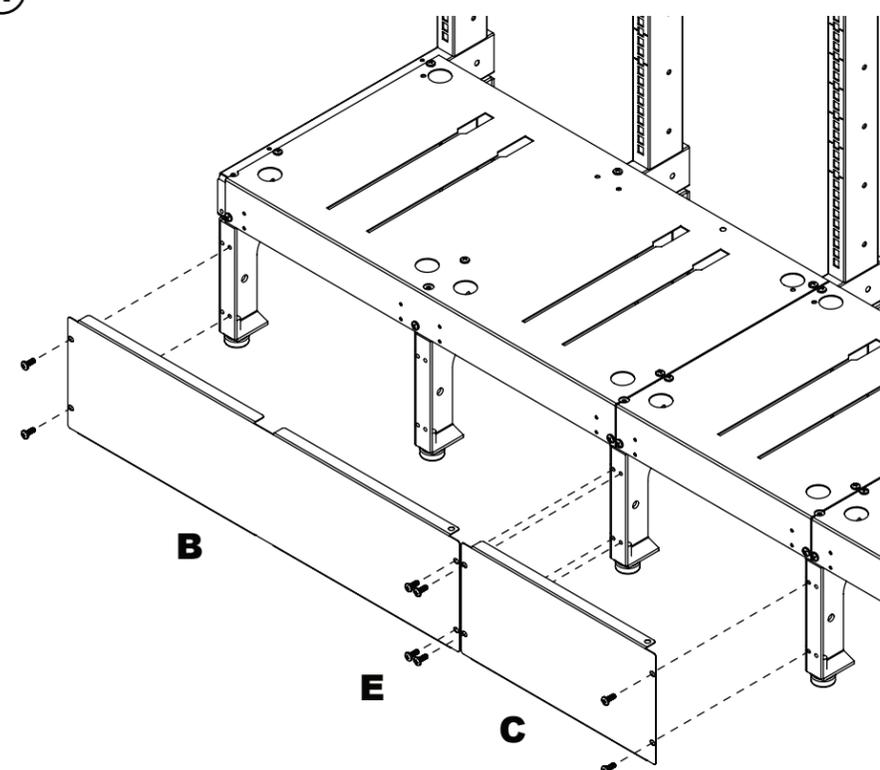

**NOTE:** Kickplates are most easily assembled after mounting store set to the wall.

# CONDENSED FRAME - 61"



IF SET DOES NOT REMAIN AT 61",  
THEN GO TO PAGE 5, *FRAME HEIGHT  
ADJUSTMENT.*

**NOTE:** Follow below steps if leaving frame at standard 61" height.

Contents: Item# 37010: Telescoping Hardware Kit


**A**

(10) #10-24 X 1.25"




**B**


(10) Keps Nuts

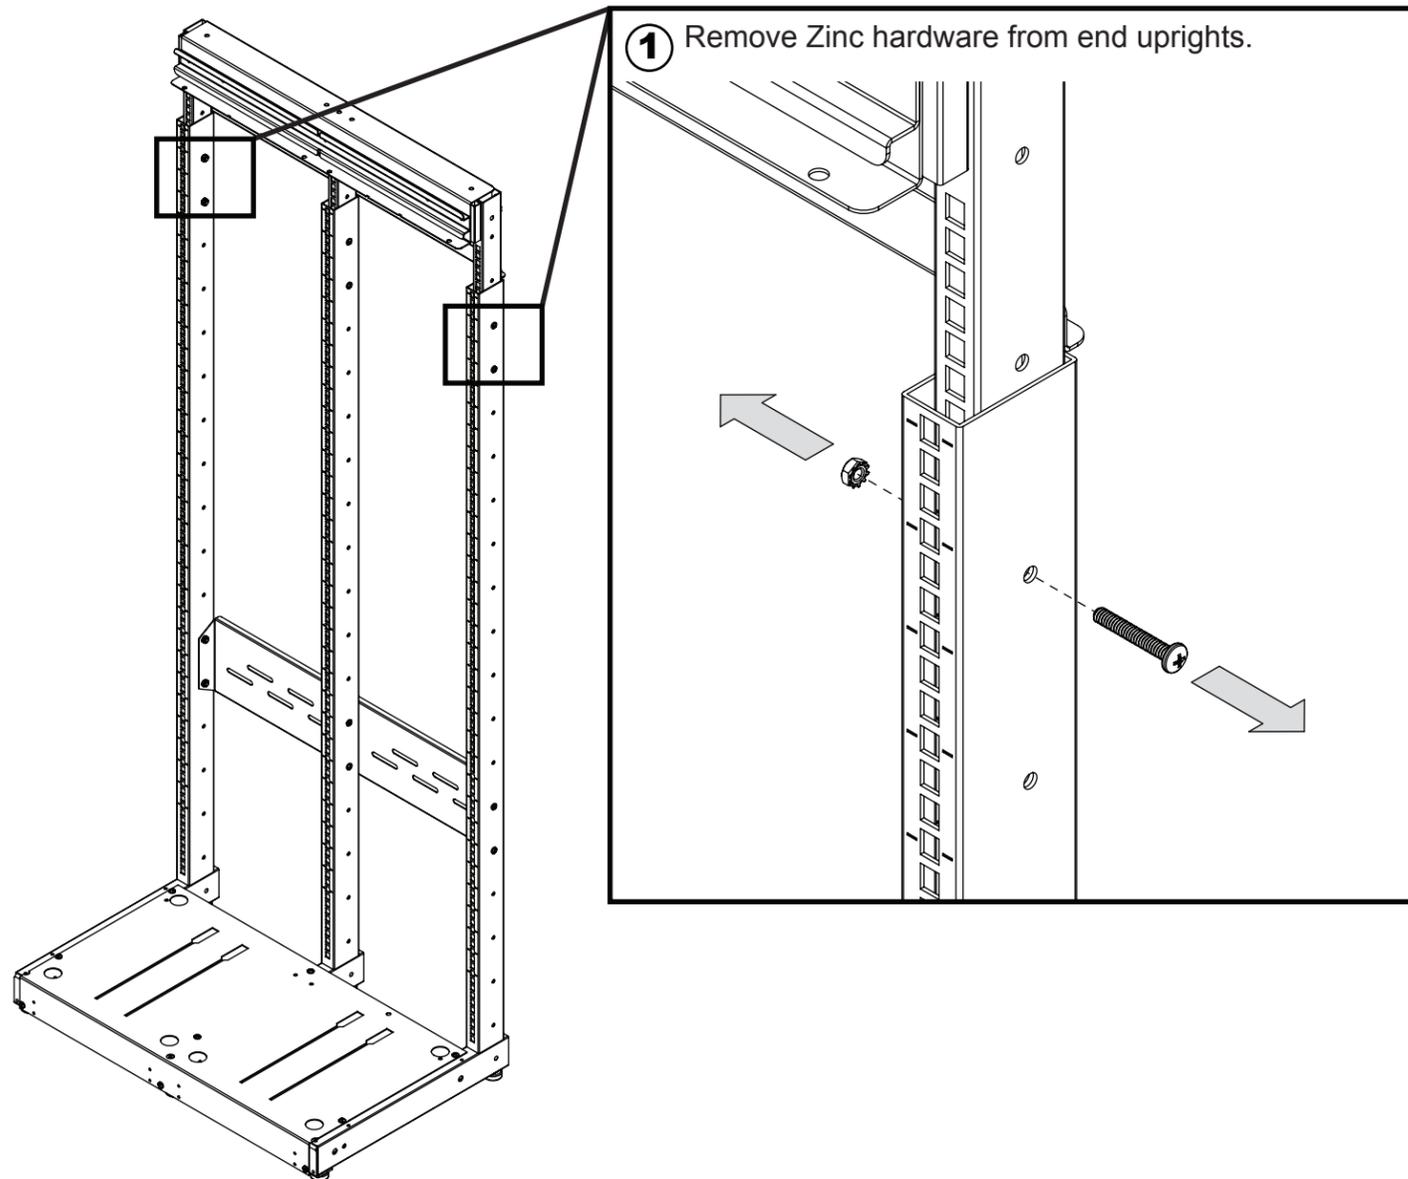

**1** Remove Zinc hardware from end uprights.

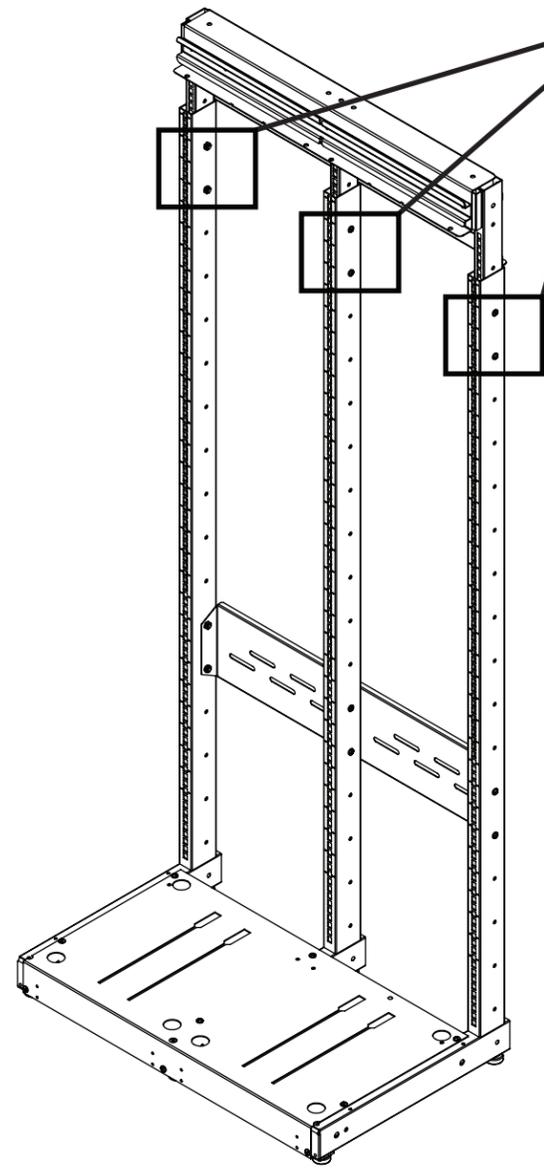

**2** Secure using 2x Black Oxide Screws (**A**) and 2x Keps Nuts (**B**) for each upright.

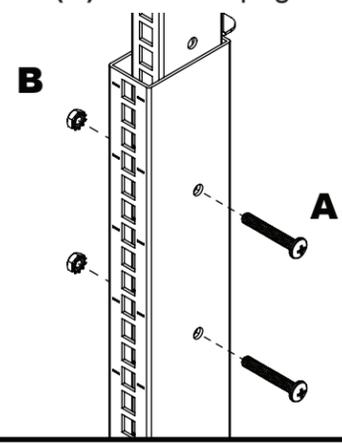

**NOTE:** Each upright requires (2) Screws & (2) Keps Nuts.

# FRAME HEIGHT ADJUSTMENT



**OPTIONAL**




IF SET DOES NOT REQUIRE **FRAME HEIGHT ADJUSTMENT**, THEN GO TO **PAGE 6, FRAME ASSEMBLY**.

**NOTE:** Standard telescoping equipment ships at 61" in height. If raising frame to 64" - 88", adjust height per instructions below.


Contents:

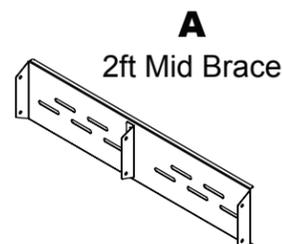


Item# 37010: Telescoping Hardware Kit

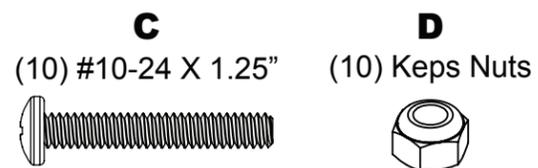


\*Contents found within "Open Me First" box.

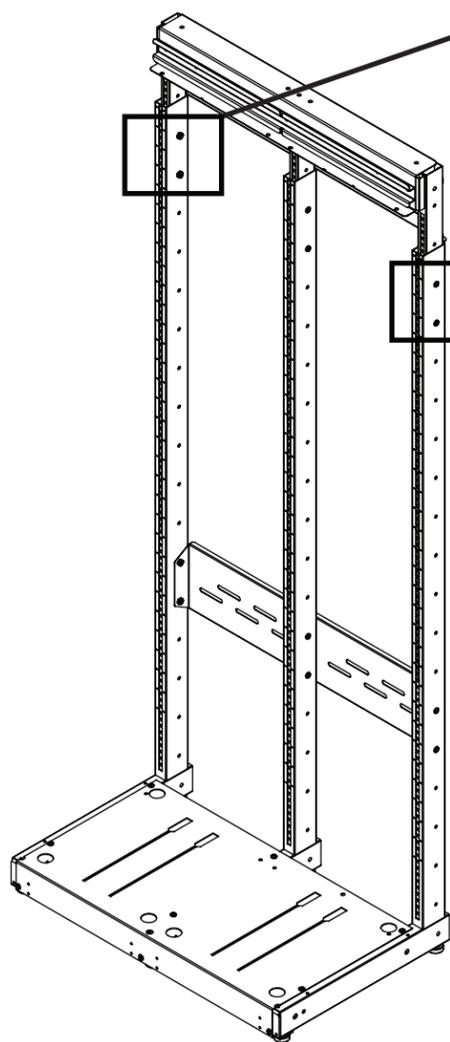

**1** Remove Zinc hardware from end uprights.

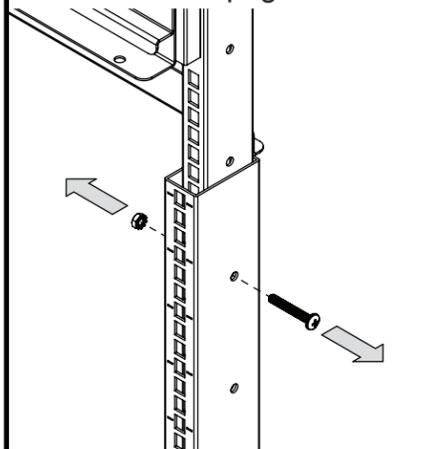


**2** Raise Frame to desired height.

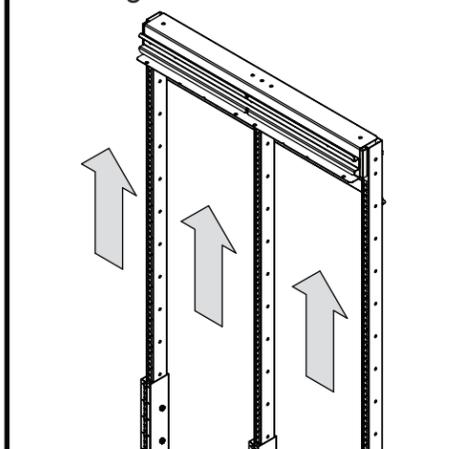


**NOTE:** If raising frame 64"-70", follow step 3 ONLY, and proceed to next page. If raising frame 73"-88", skip step 3, and proceed to step 4.

**3** Secure using 2x Black Oxide Screws (**C**) and 2x Keps Nuts (**D**) for each upright.

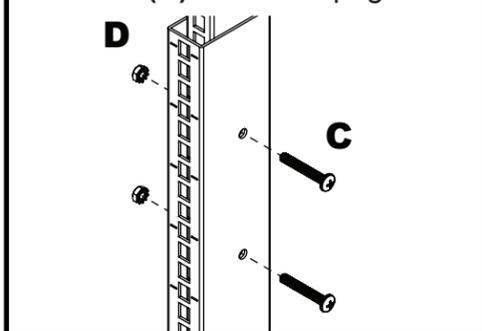


**NOTE:** Each upright requires (2) Screws & (2) Keps Nuts.

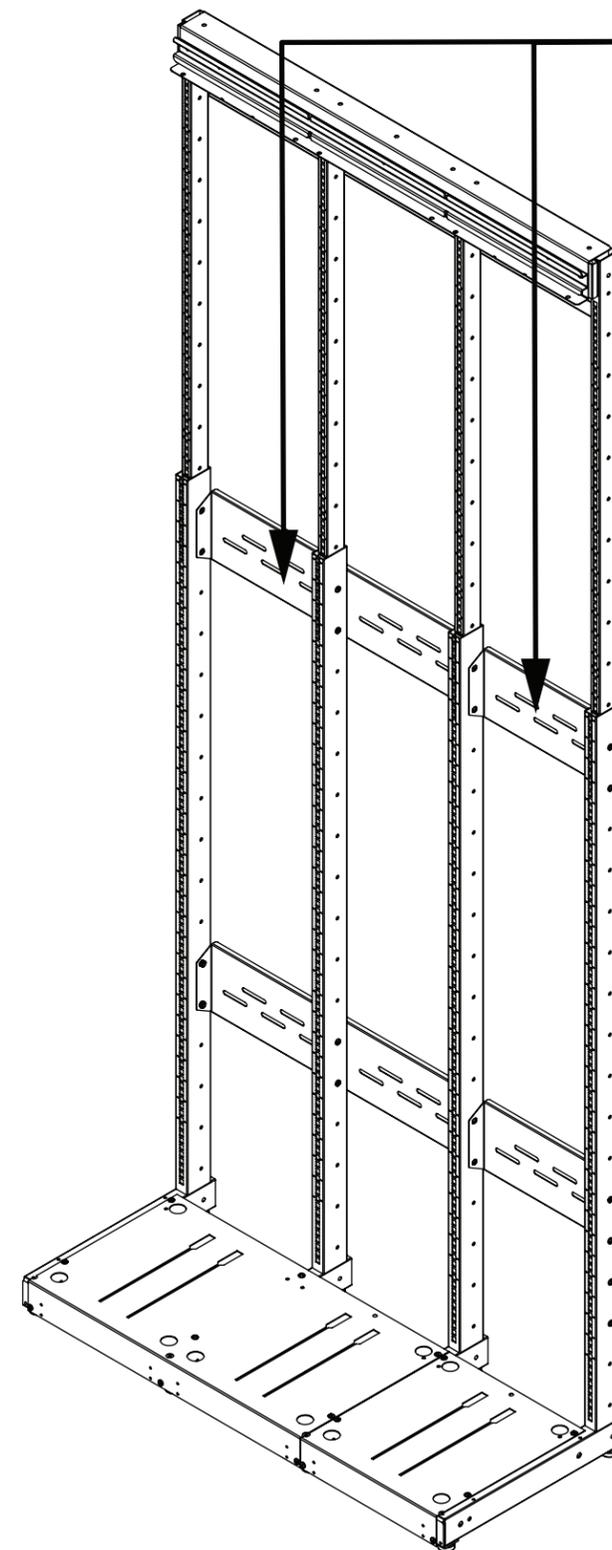


**NOTE:** Mid Braces ship in "Open Me First" box.

**4** Once fixture height has been determined, install Mid Braces. Position as high on lower frame as possible.

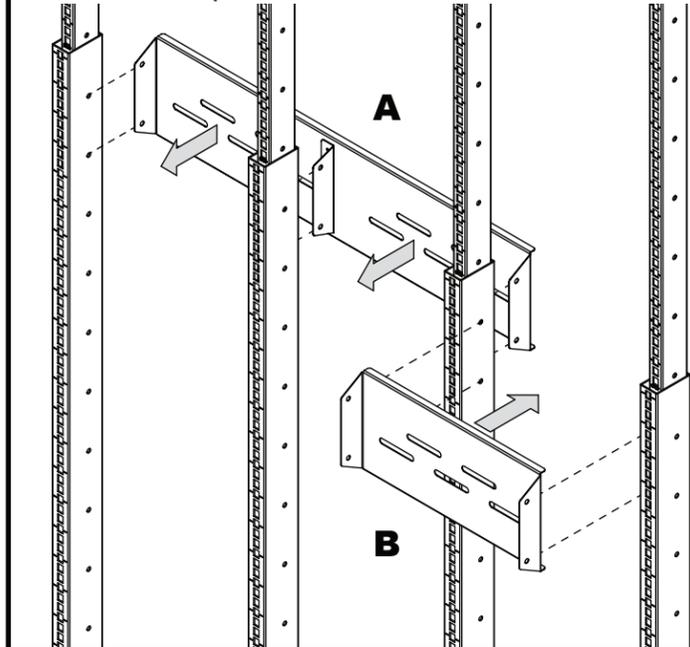

**5** Secure Mid Braces using #10-24 x 1.25" Screws (**C**) and Keps Nuts (**D**).

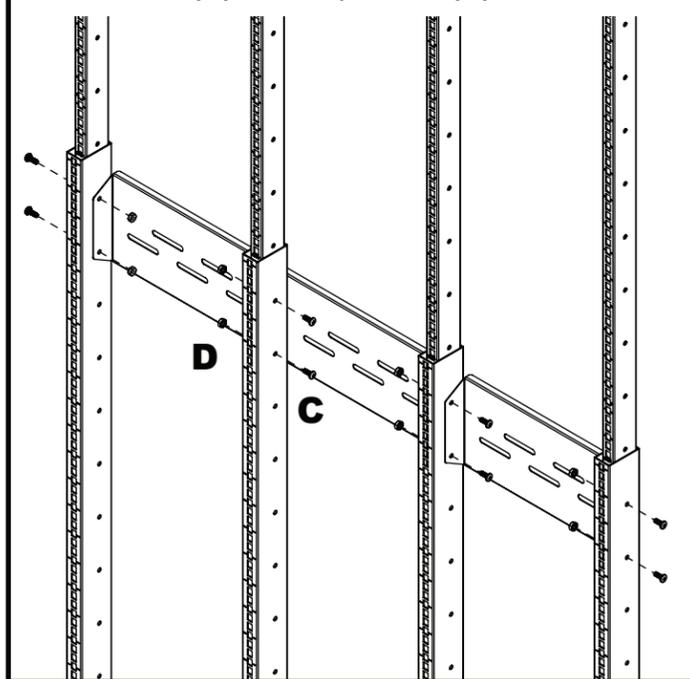

**NOTE:** Braces can be moved/adjusted to accommodate in-store obstructions.

**NOTE:** Adjust heights on all frames before next step.

# FRAME ASSEMBLY

\*1FT HP CONNECTOR KIT : ITEM# 31211

\*1FT LP CONNECTOR KIT : ITEM# 30261

\*Boxes labeled as "Open Second"

Contents:

Item# 30248:  
Spline Fixture Kit

**A**  
(2) Spline




Item# 37040:  
Hardware Kit


**E**  
(10) 10-24 x 1/2" Screw



**B**  
(1) 1ft Header Connector




**C**  
(1) 1ft Deck Connector



Item# 370535:  
Deck & Header Connector  
Hardware Kit


**F**  
(10) 10-24 x 1/2" Screw



**NOTE:** Additional brace only  
included in HP Connector Kit.

Item# 30241: 1ft Brace Kit

**D**  
(1) 1ft Brace



**H**  
(4) #10 Keps Nuts



**G**  
(4) 10-24 x 1-1/4" Screw




**NOTE:** Most store sets come with connector kits. Connector kits need to be installed between each frame.



**NOTE:** Do not fully tighten screws until final step.

**NOTE:** Mid Braces ship  
in "Open Me First" box.


**1** Install 1ft Deck Connector (C) using  
10-24 x 1/2" Screw (F).

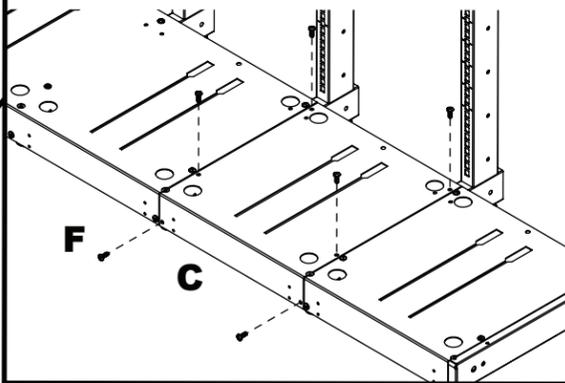


**2** Install 1ft Brace (D) using 10-24 x  
1-1/4" Screw (G) and Keps Nuts (H).

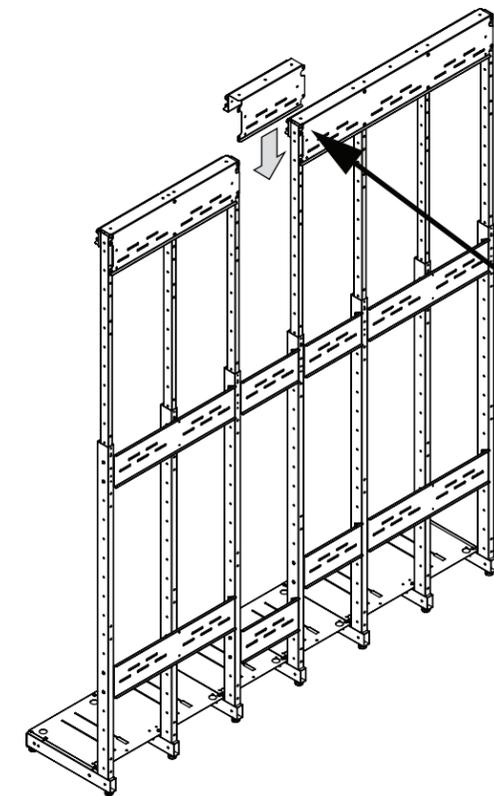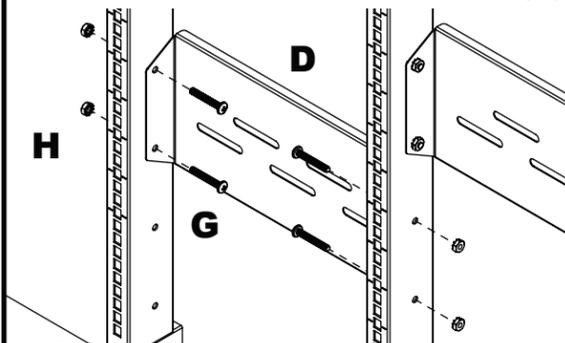

**3** Install 1ft Header Connector (B) with 10-24 x 1/2" Screw (F).

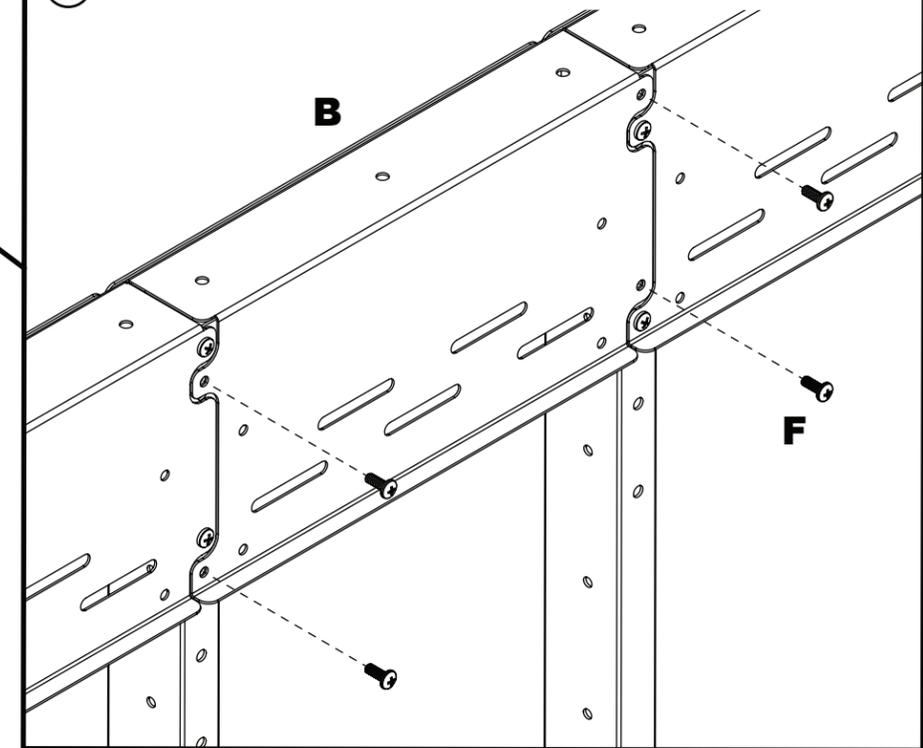

**4** Install Splines (A) in between Frame seams using 10-24 x  
1/2" Screws (E).

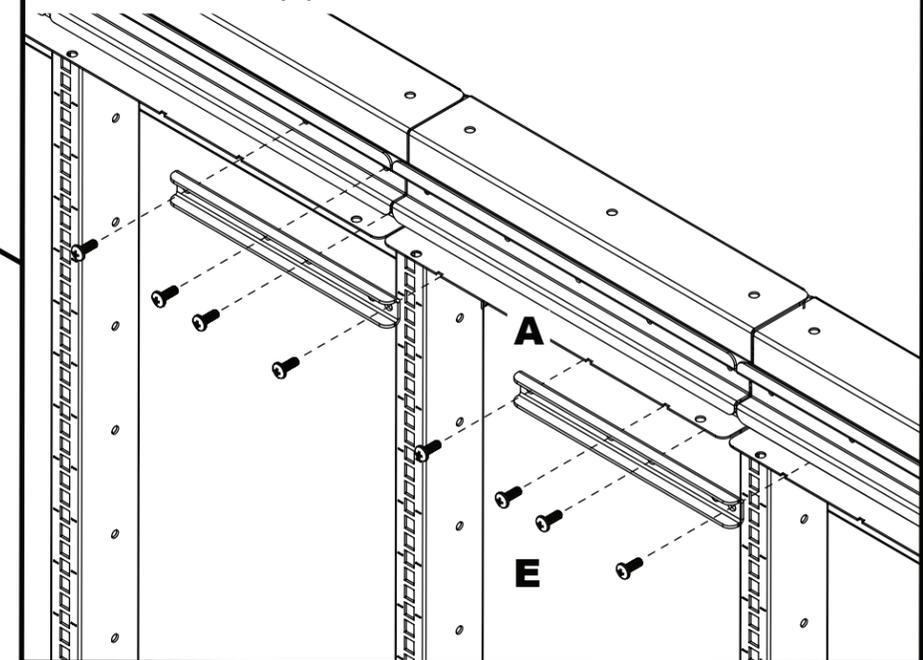

**NOTE:** After all connector components are installed, fully tighten  
all screws

\*Image shown as Telescoping High Profile for reference only.

# CONDENSED BACK PANEL KIT

★ ACCESSORY ★




IF SET DOES NOT REQUIRE  
CONDENSED (61" HEIGHT) BACK  
PANEL KIT, THEN GO TO PAGE 9,  
CONDENSED SIDE PANEL KIT.

1FT CONDENSED BACK PANEL : ITEM# 30267  
2FT CONDENSED BACK PANEL : ITEM# 30268

Contents:

**A**  
1' or 2'  
Back Panel (1)



**NOTE:** Score mark is  
on the front side only.

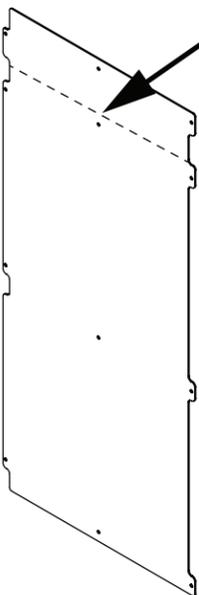

**B**  
Push Fastener (12)





**OPTIONAL**  
If 55" Low Profile display is required,  
cut along score on Back Panel as  
shown before securing to uprights.

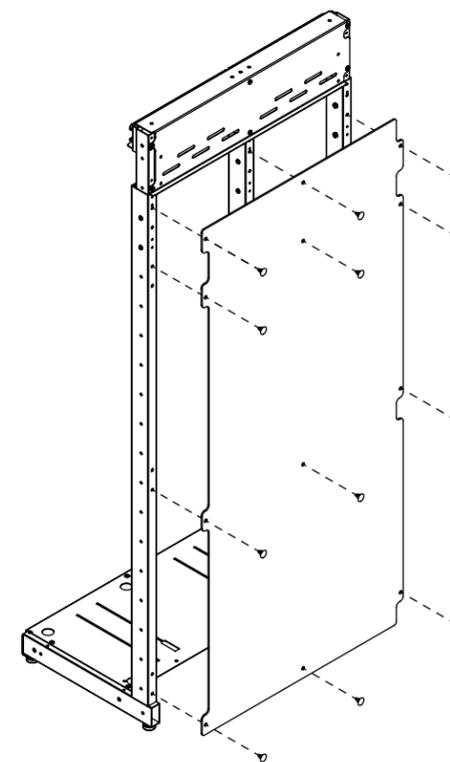
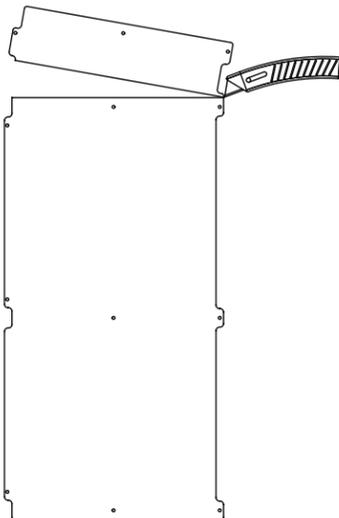


**2** Secure Back Panel (A) using Push Fasteners (B)  
as shown.

**▲** Score mark in panel faces inward when installed.

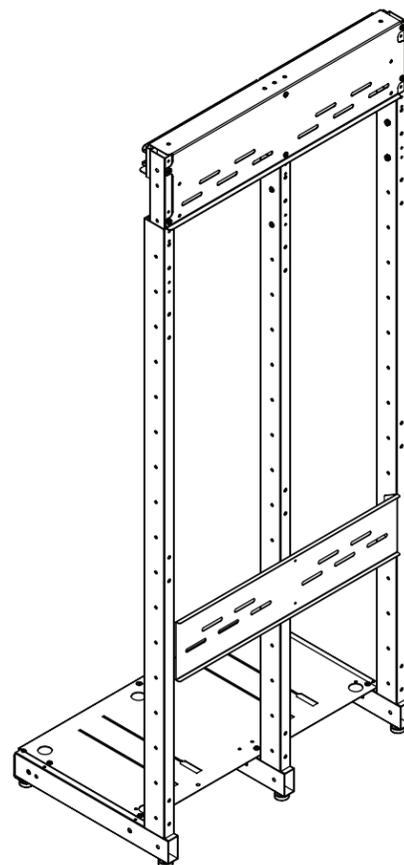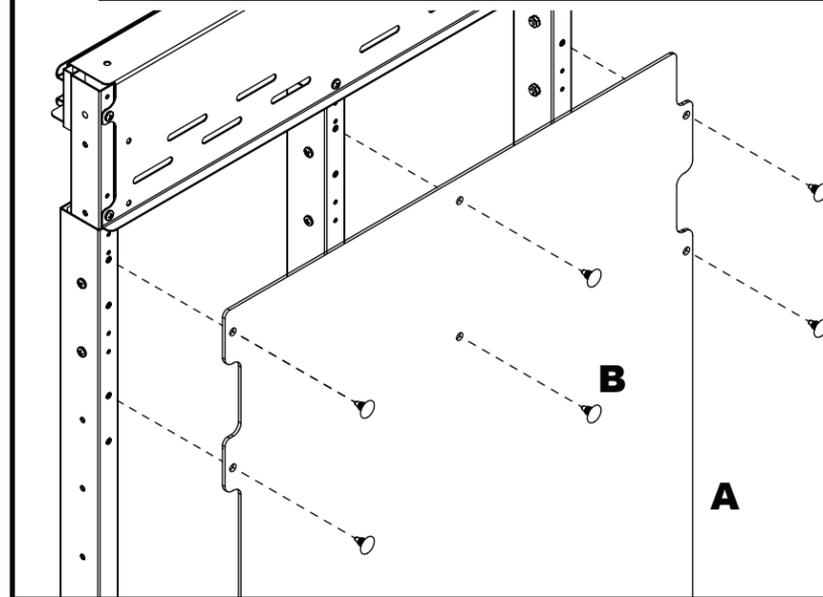


**1** Remove Horizontal Back Braces.

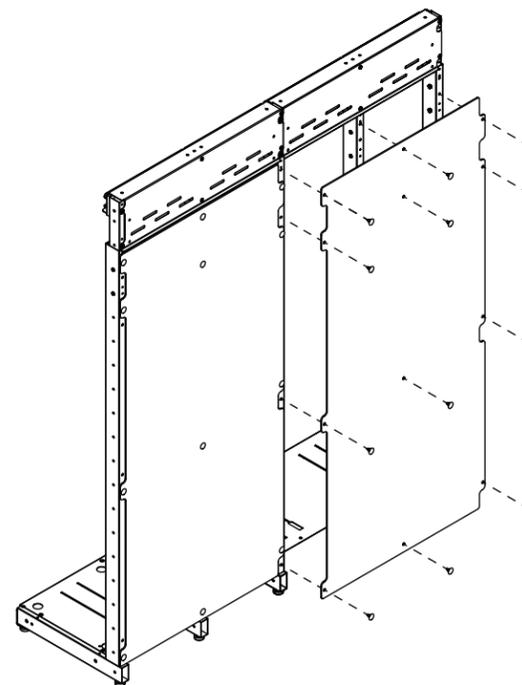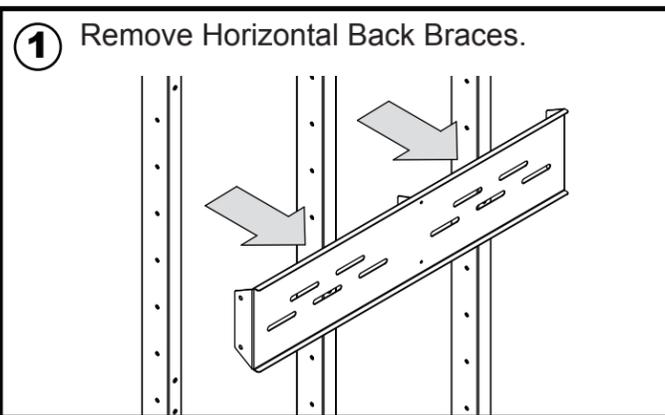

**3** For larger frame assemblies, piece together multiple Back  
Panels (A) as shown.

**▲** Score mark in panel faces inward when installed.

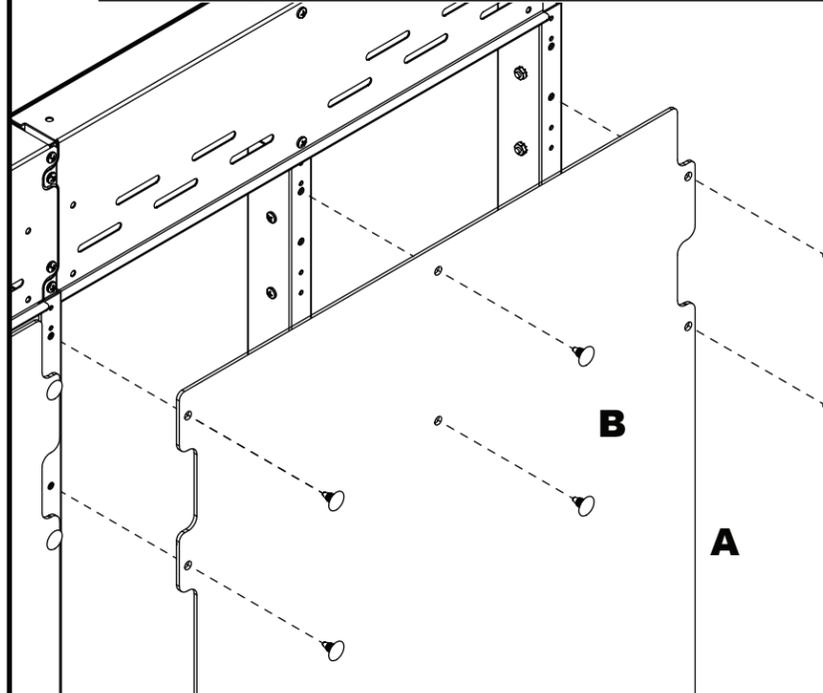


# Condensed Low Profile 2' Back Decor Panel Kit *★ACCESSORY★*

2FT CP / LP BACK DECOR PANEL : ITEM# 30572




## Contents:






2' Back Panel (1)

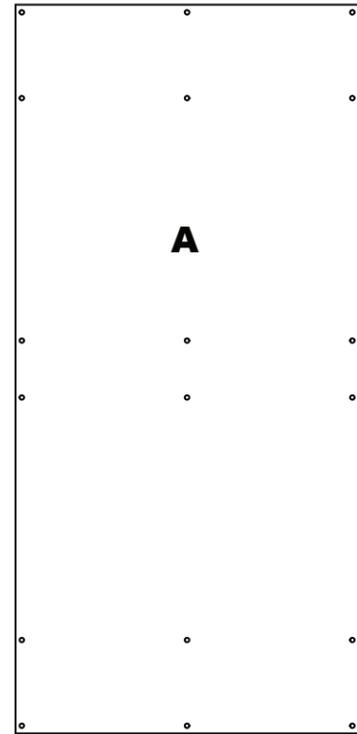

**A**



If 55" Low Profile display is required, measure 6" from top and cut Back Panel as shown before securing to uprights.

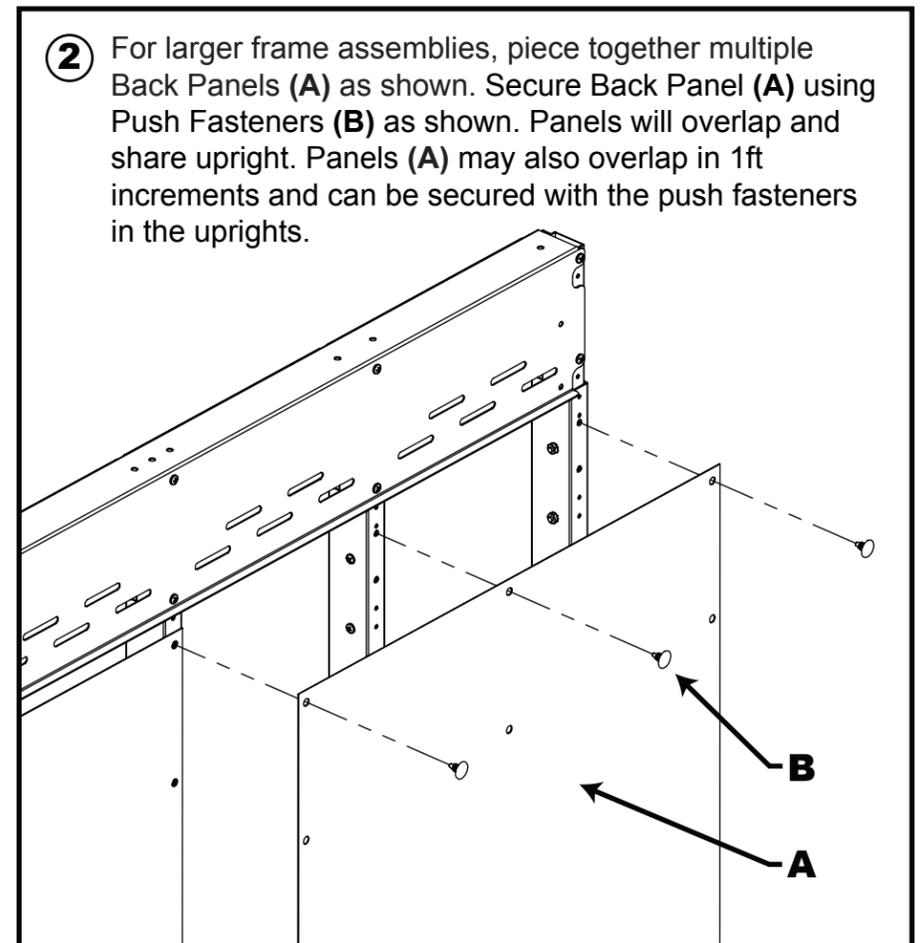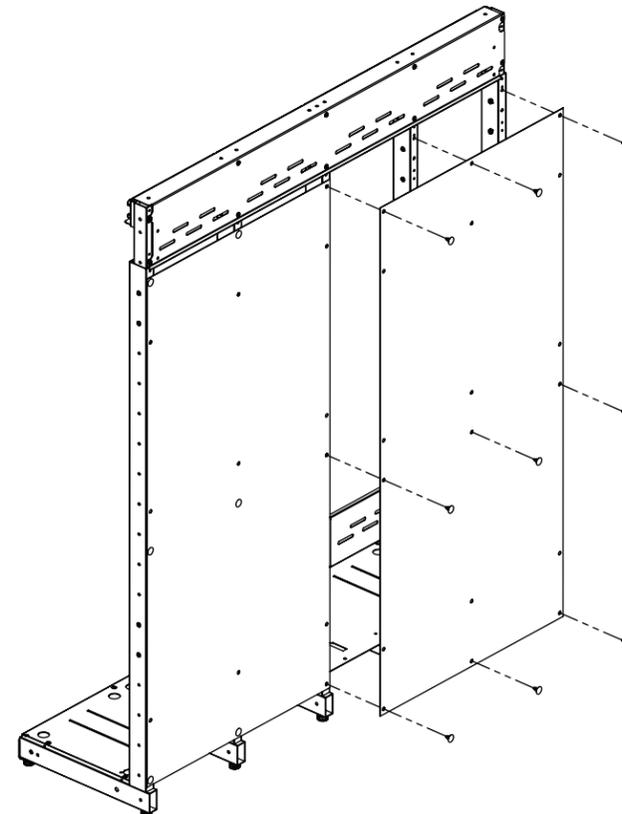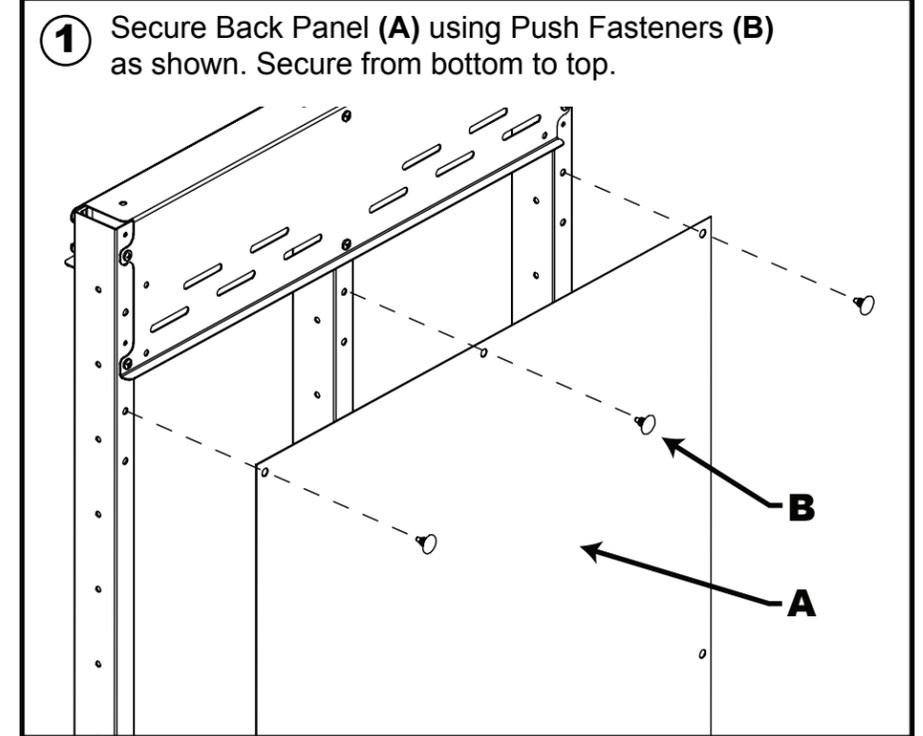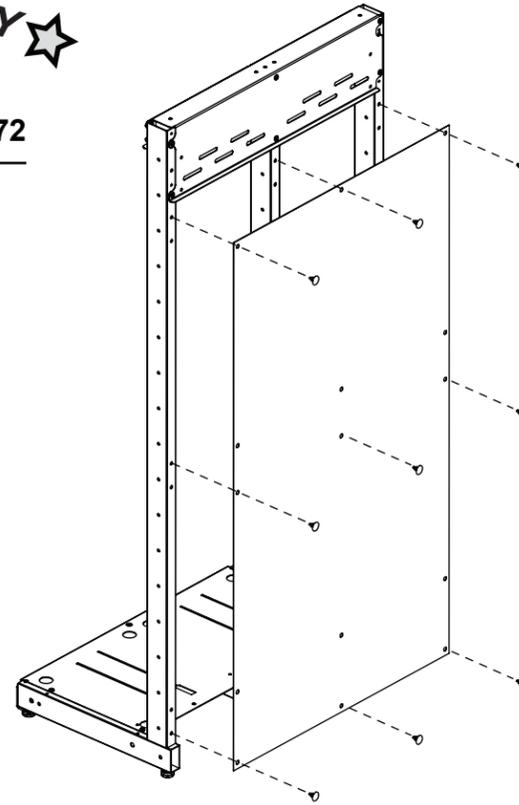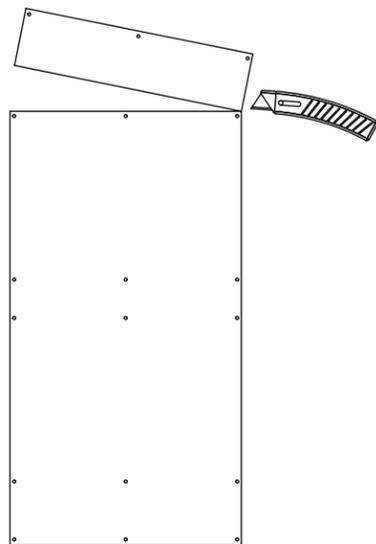

# CONDENSED SIDE PANEL KIT






IF SET DOES NOT REQUIRE *CONDENSED SIDE PANEL KIT*, THEN GO TO PAGE 10, *HIGH PROFILE BACK PANEL KIT*.

★ **ACCESSORY** ★


CONDENSED SIDE PANEL KIT :  
ITEM# 30217

Contents:

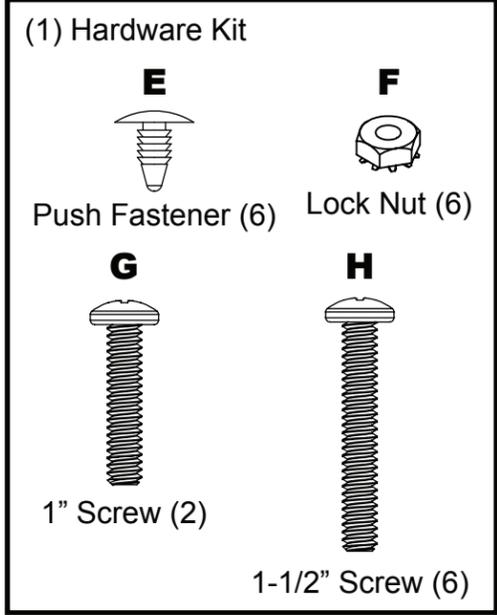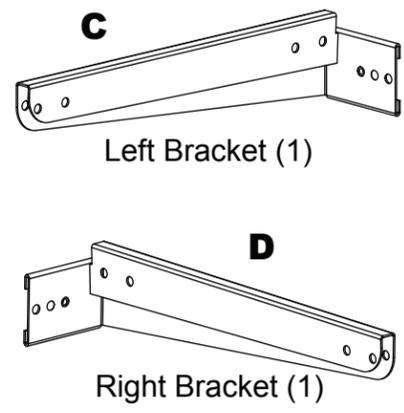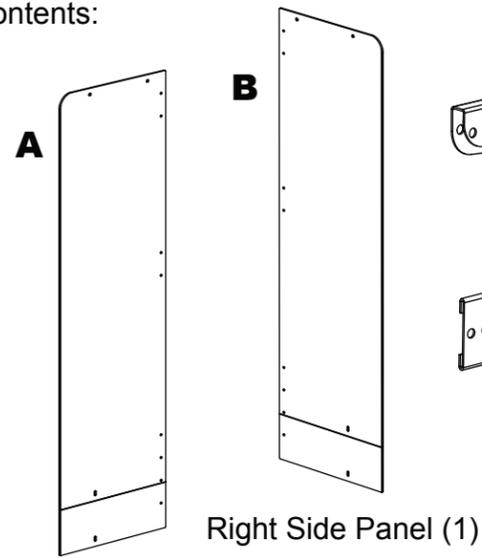


Left Side Panel (1)

**▲ OPTIONAL**  
If 55" Low Profile display is required, cut along score on Side Panel as shown before securing to uprights.

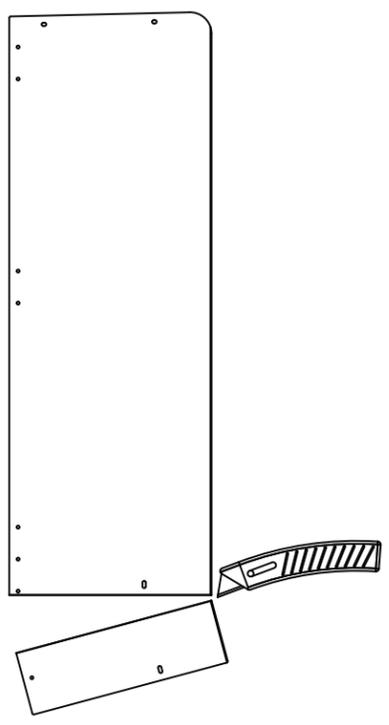


**1** Install Right Bracket (**D**) onto channel.  
**▲ NOTE:** Outside of bracket should be flush with outside of upright.

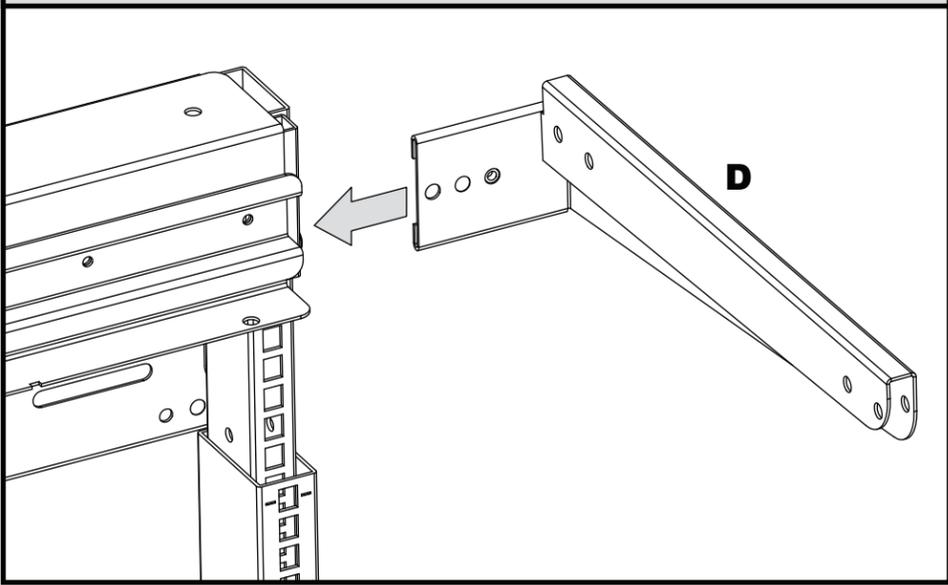


**2** Secure using 1" screw (**G**).  
**▲ NOTE:** If installing toppers, do not tighten screws until toppers are installed.

**3** Repeat for Left Bracket (**C**).  
**▲ NOTE:** If installing toppers, do not tighten screws until toppers are installed.

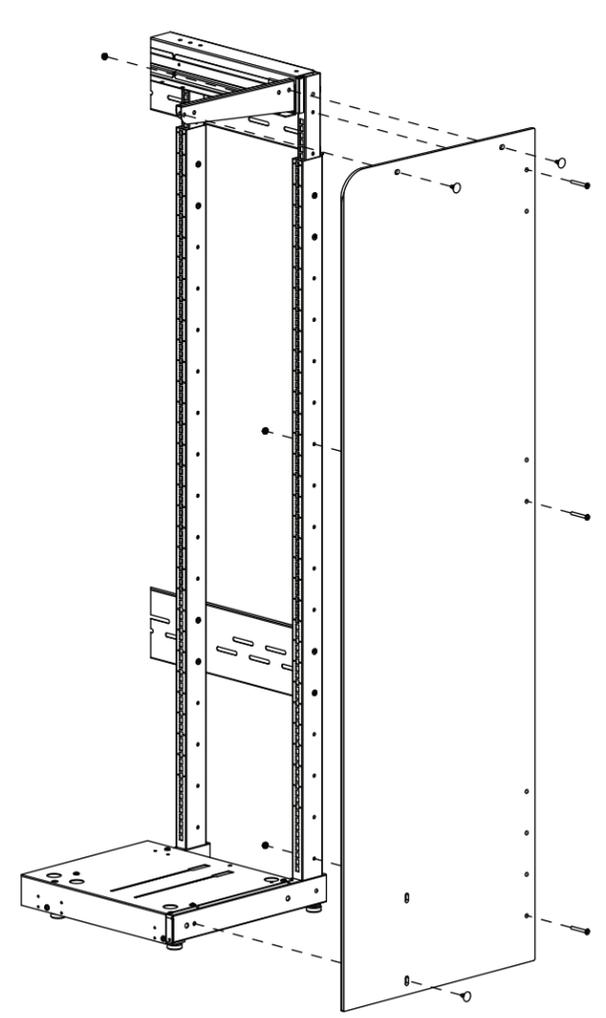

**4** Install Right Side Panel (**B**) using Push Fastener (**E**), 1-1/2" Screw (**H**), and Lock Nut (**F**) as shown. Repeat for Left Side Panel (**A**).

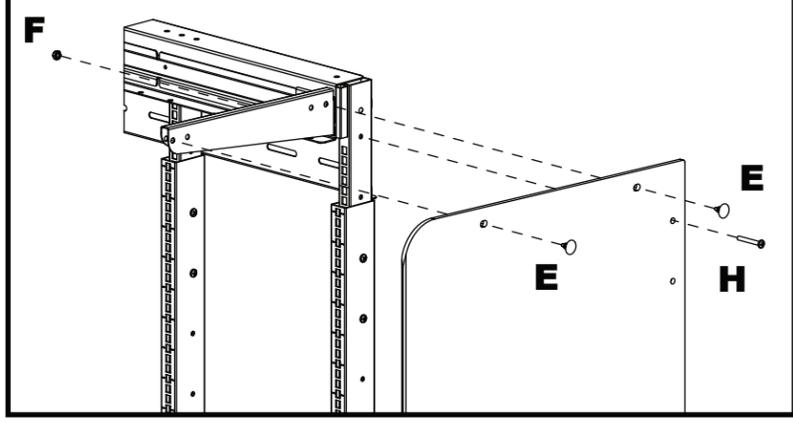

**▲** Grooves on side panel face inward when installed.

# HIGH PROFILE BACK PANEL KIT


★ACCESSORY★

12




IF SET DOES NOT REQUIRE *HIGH PROFILE BACK PANEL KIT*, THEN GO TO PAGE 12, *HIGH PROFILE SIDE PANEL ADD-ON KIT*.

HIGH PROFILE BACK PANEL KIT :  
ITEM# 30281


Contents:

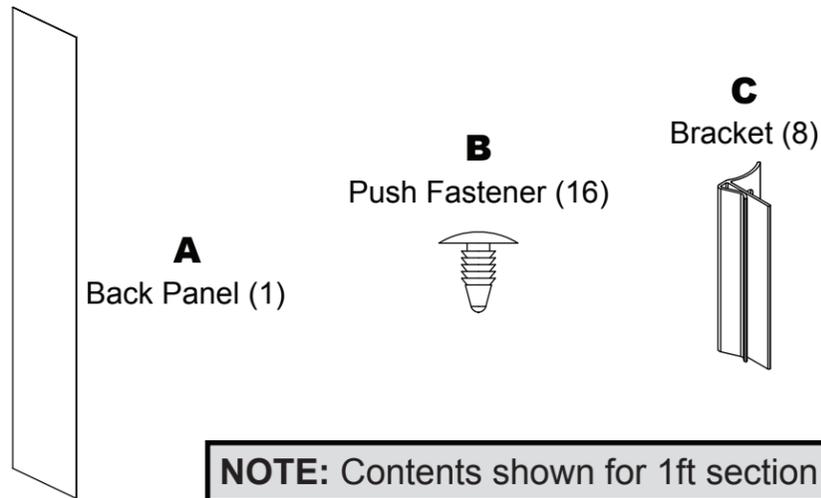


**NOTE:** Contents shown for 1ft section

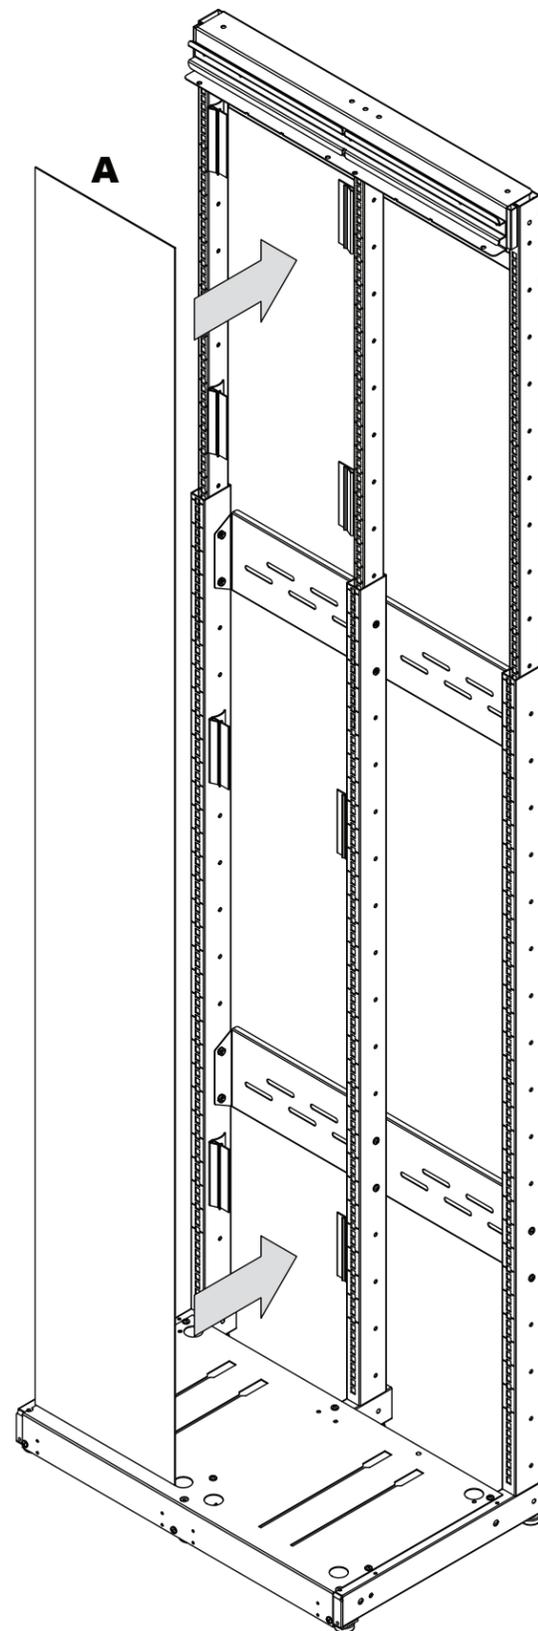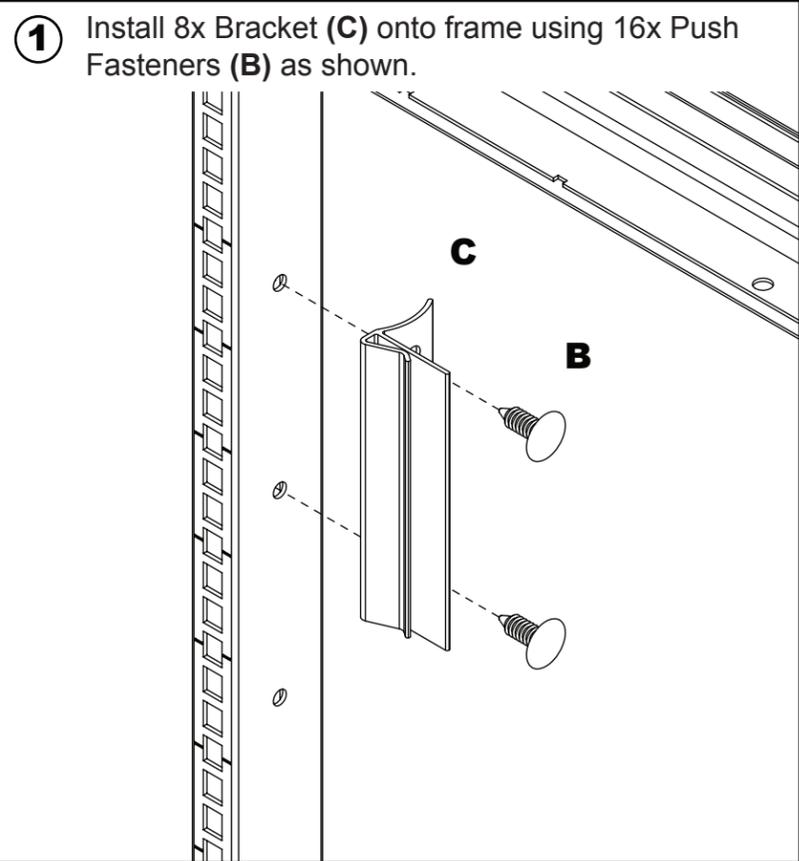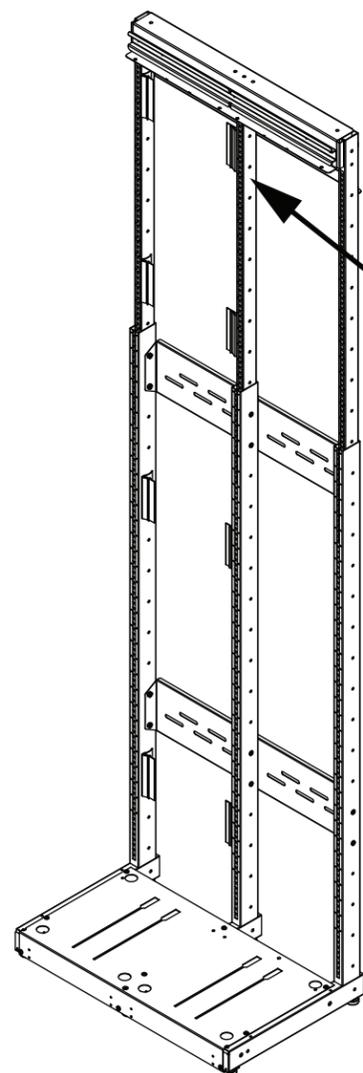

**2** Install Back Panel (A) into Brackets (C).

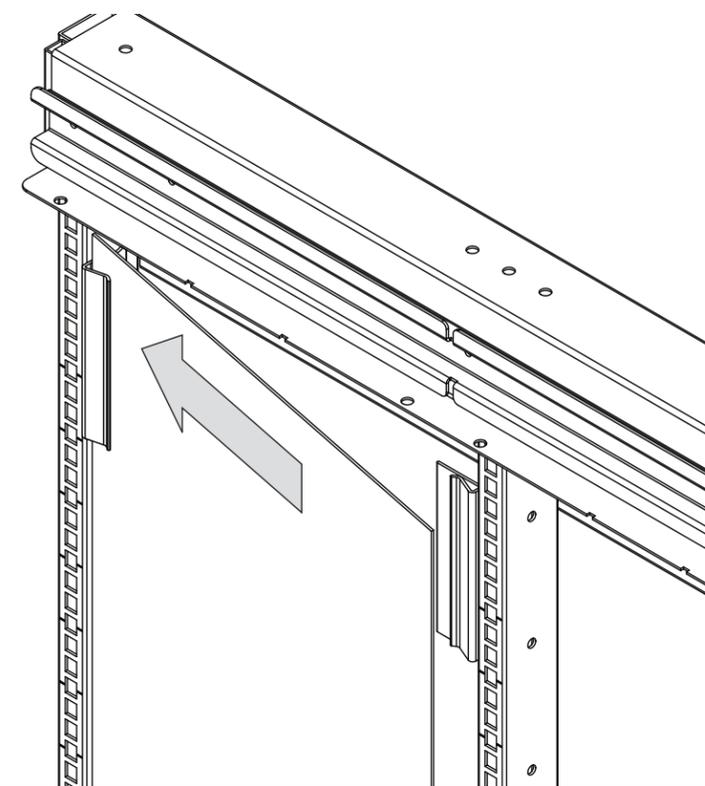

**3** Slightly bend Back Panel (A) to slide into Brackets.

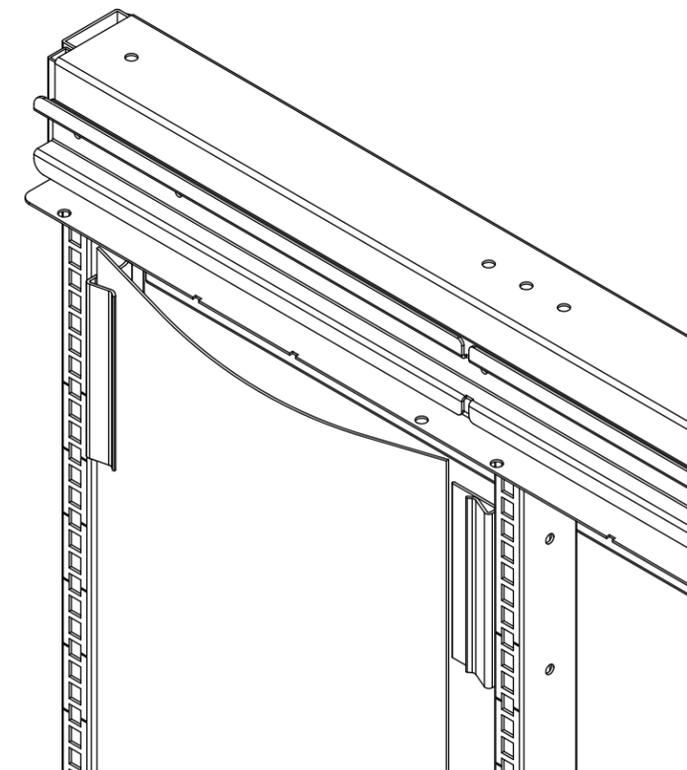


# High Profile 2' Back Decor Panel Kit

★ACCESSORY★

2FT HP BACK DECOR PANEL : ITEM# 30582


## Contents:

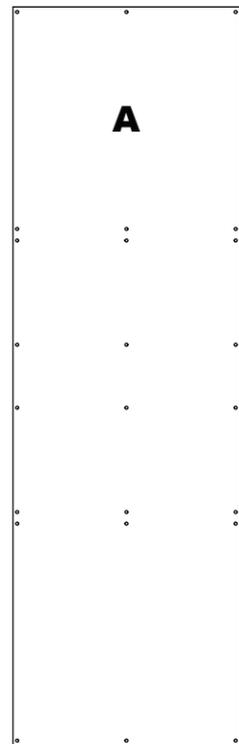


2' Back Panel (1)




Push Fastener (15)




Tape (7)

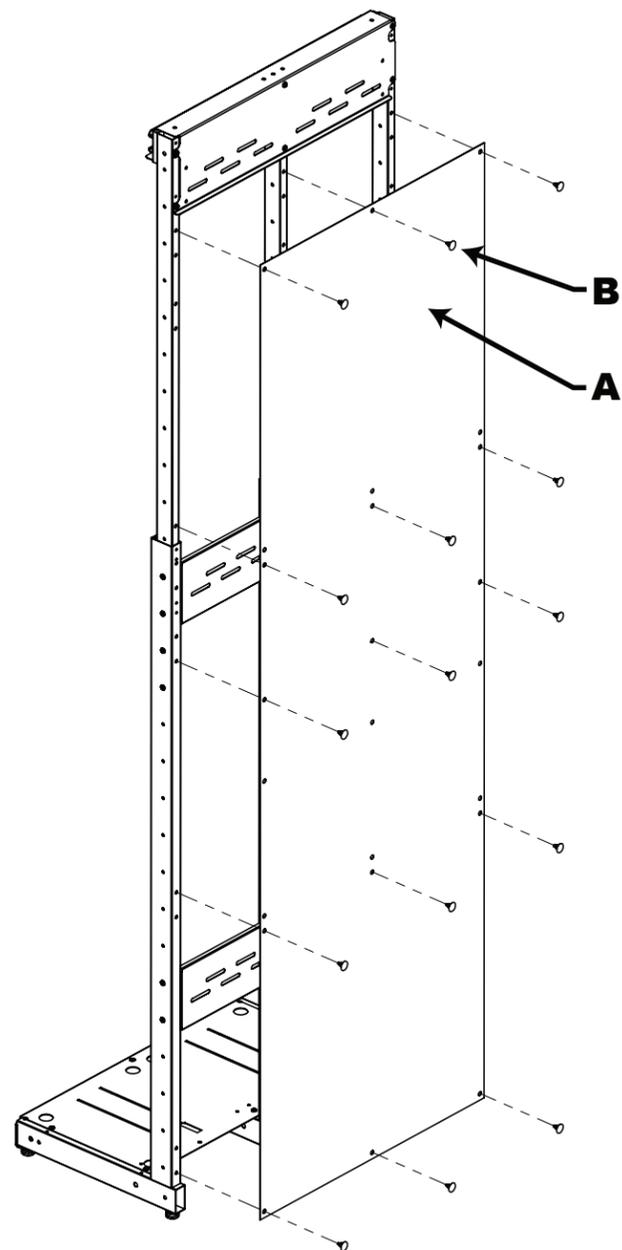

- 1 Secure Back Panel (A) using Push Fasteners (B) as shown. Secure from bottom to top.

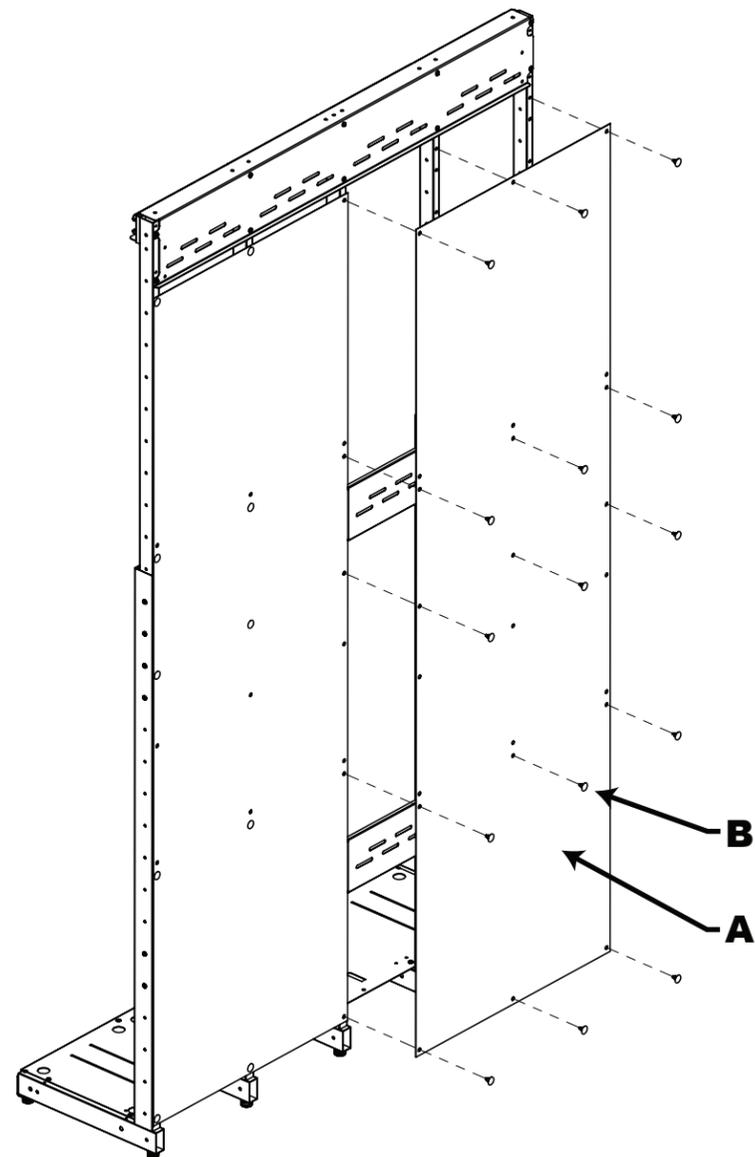

- 2 For larger frame assemblies, piece together multiple Back Panels (A) as shown. Secure Back Panel (A) using Push Fasteners (B) as shown. Panels will overlap and share upright. Panels (A) may also overlap in 1ft increments and can be secured with the push fasteners in the uprights.

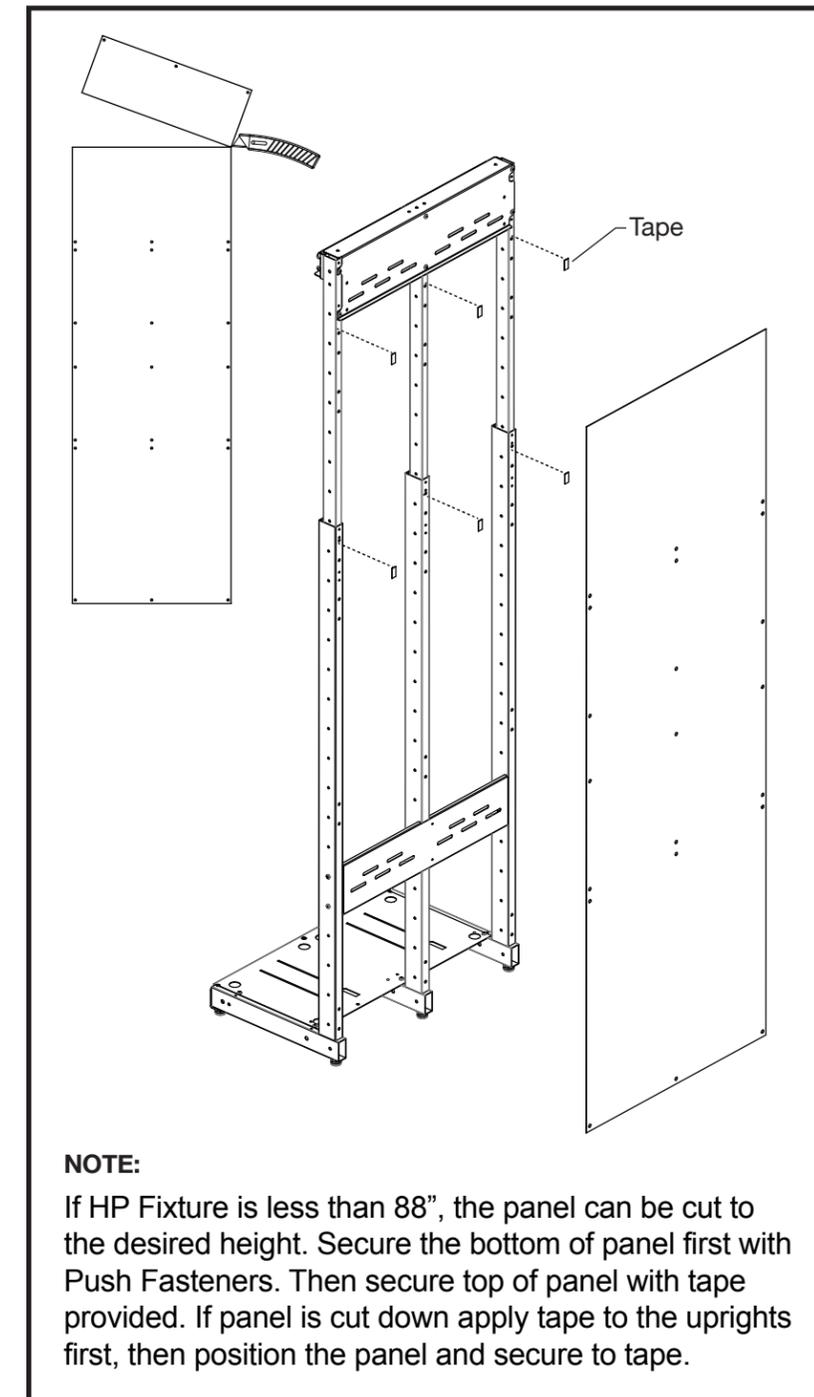

### NOTE:

If HP Fixture is less than 88", the panel can be cut to the desired height. Secure the bottom of panel first with Push Fasteners. Then secure top of panel with tape provided. If panel is cut down apply tape to the uprights first, then position the panel and secure to tape.

# HIGH PROFILE SIDE PANEL ADD-ON KIT



★ ACCESSORY ★

13

IF SET DOES NOT REQUIRE *HIGH PROFILE SIDE PANEL ADD-ON KIT*, THEN GO TO PAGE 13, *ANCHORING*.

HIGH PROFILE SIDE PANEL ADD-ON KIT : ITEM# 30218

Contents:

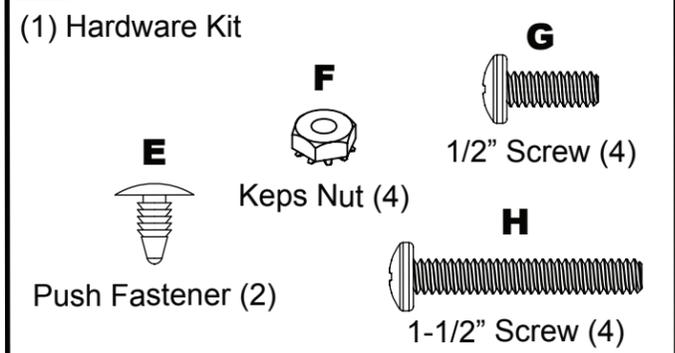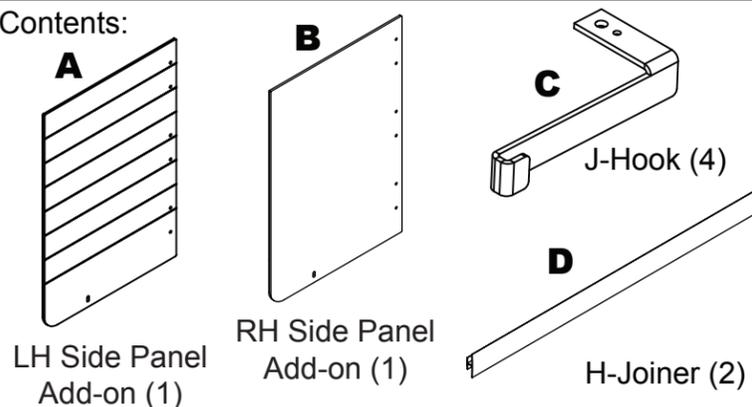


## ⚠ WARNING

Add-on Kit is designed to be installed with Condensed Side Panel Kit #30217. Install Condensed Side Panel Kit #30217 before continuing with Installation.


**NOTE:** Do not fully tighten any screws and nuts until last step.

1 Secure Side Panel Add-on (B) & (A) (grooves face inward) with 1-1/2" Screws (H), Keps Nuts (F), and Push Fastener (E).

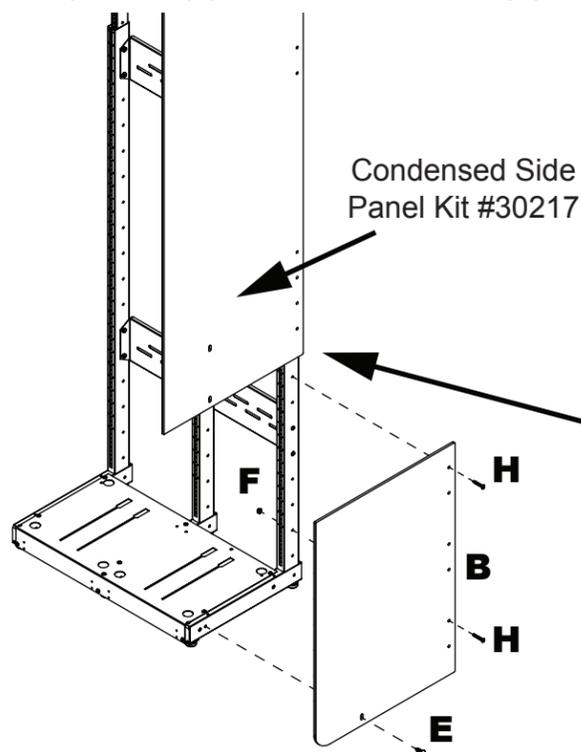


## ⚠ OPTIONAL


Cut along score on Side Panel Add-on to achieve desired height before securing to uprights.

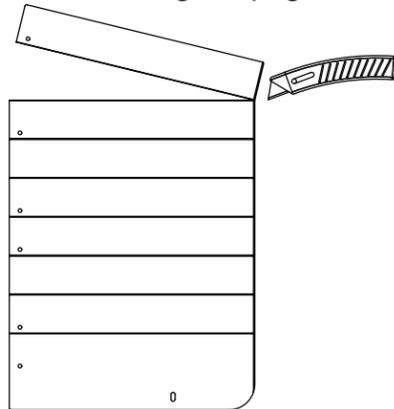


2 Slide H-Joiner (D) between Side Panel Item#30217 and Side Panel Add-on (A) or (B).

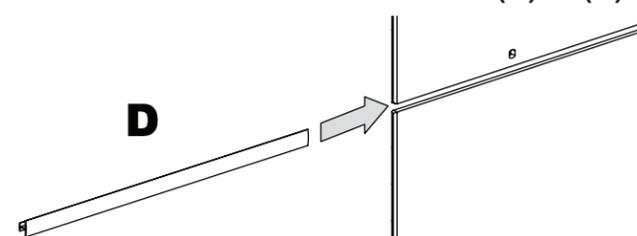


3 Loosely pre-install 1/2" Screw (G) to J-Hook (C) as shown. Do not fully tighten.

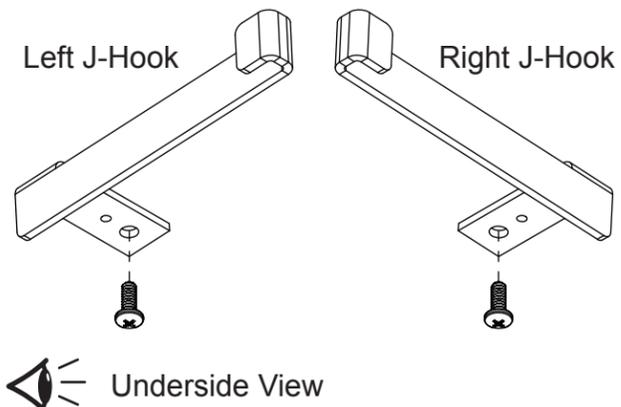

4 Install shelf towards top of lower slotted upright, other lower on the add-on Panel.

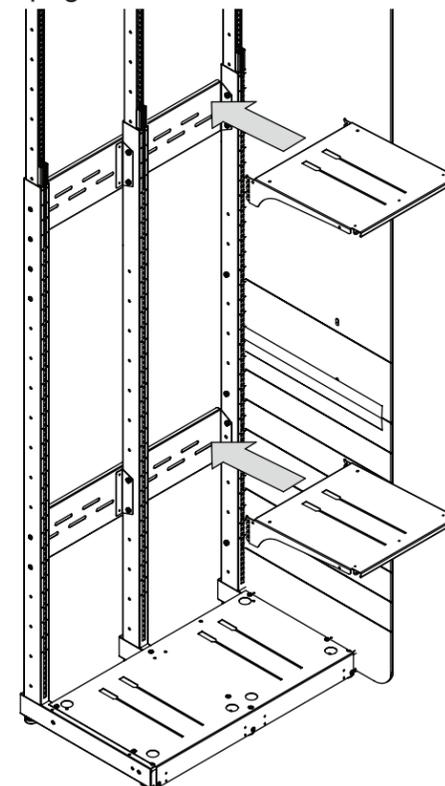


⚠ Do NOT install shelf or J-Hook above lower slotted upright.

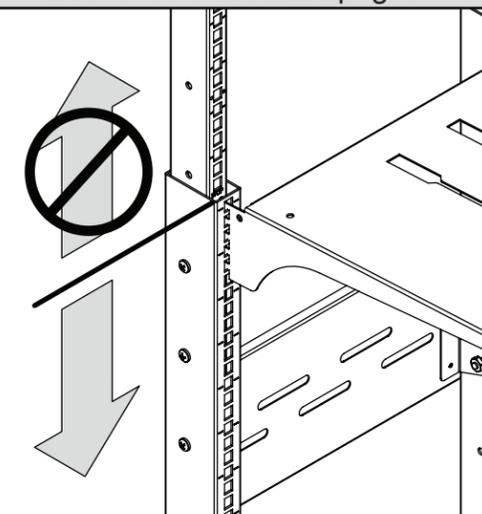

5 Engage J-Hook (C) over Side Panel (A) or (B) and slide bracket tab into side of shelf channel. Tighten 1/2" Screw (G).





**NOTE:** Tighten all side panel screws and nuts.

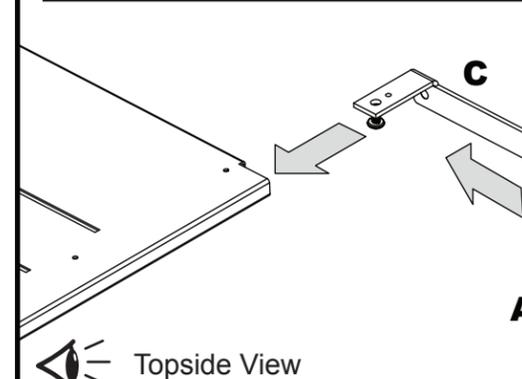


# ANCHORING

## WALL MOUNT ANCHOR KIT : ITEM# 37020




Contents:

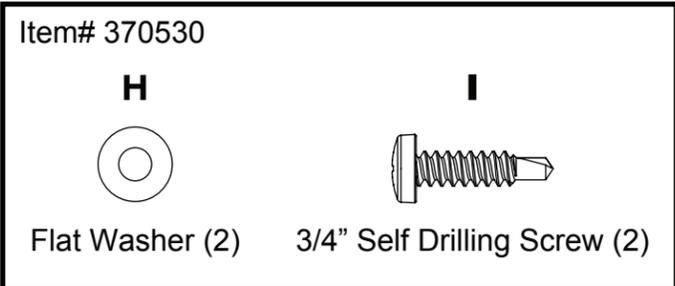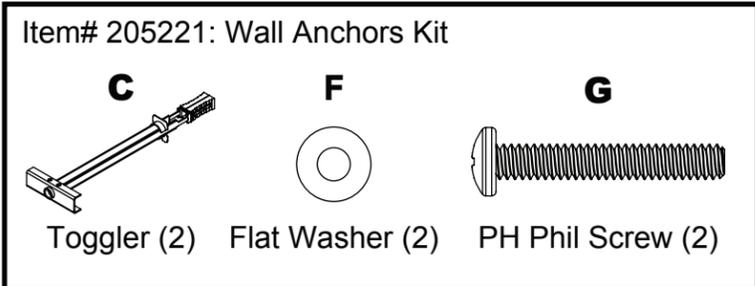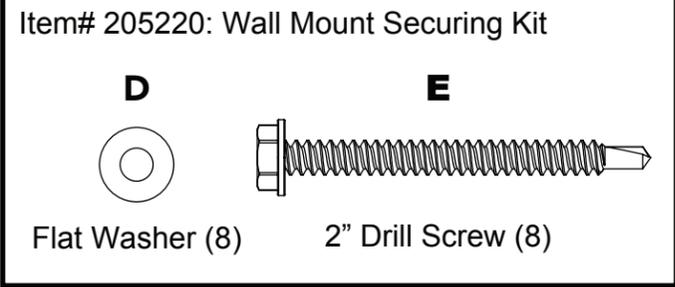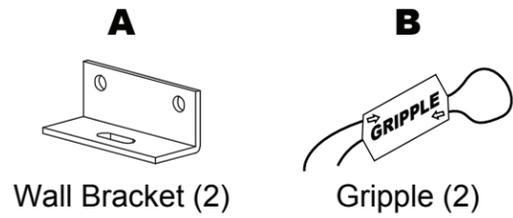

**NOTE:** Adjust levelers to align displays before continuing.

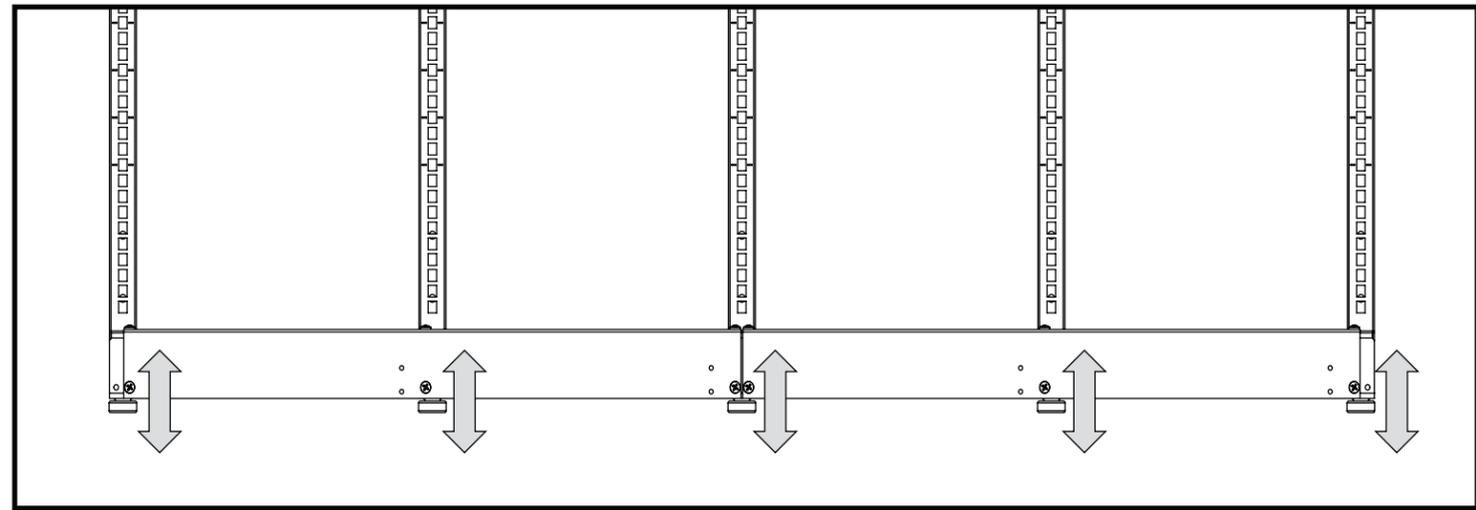

**⚠ WARNING**  
Contractor is responsible for choosing (and providing, if necessary) proper hardware usage for specific site condition.

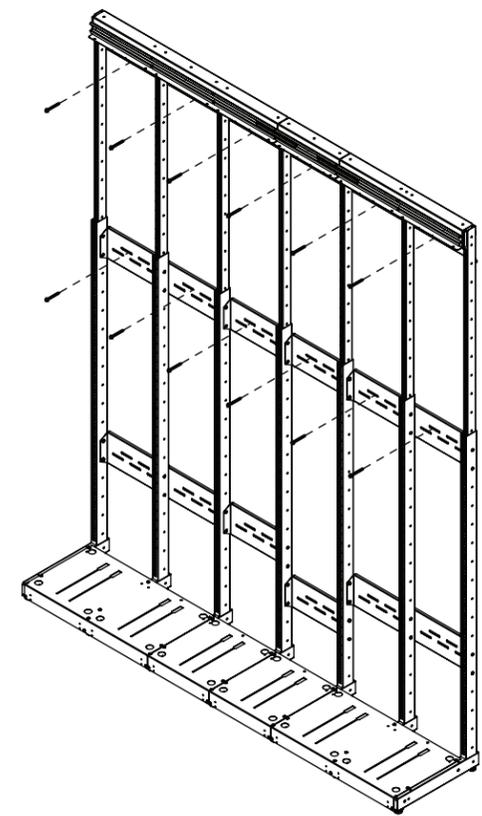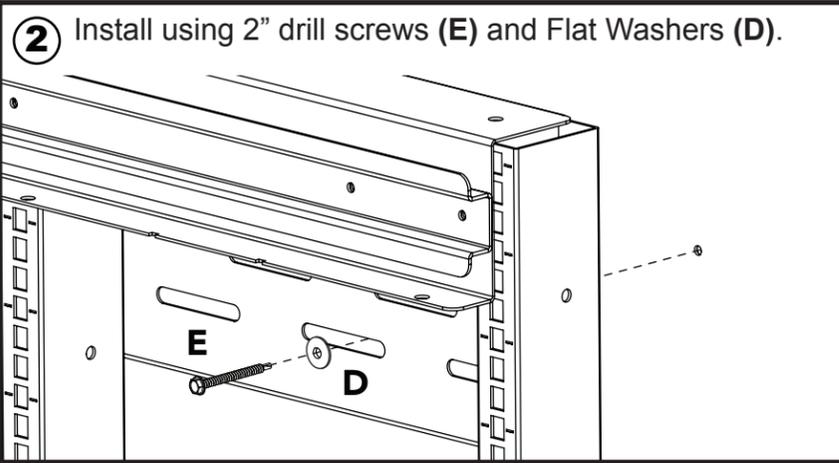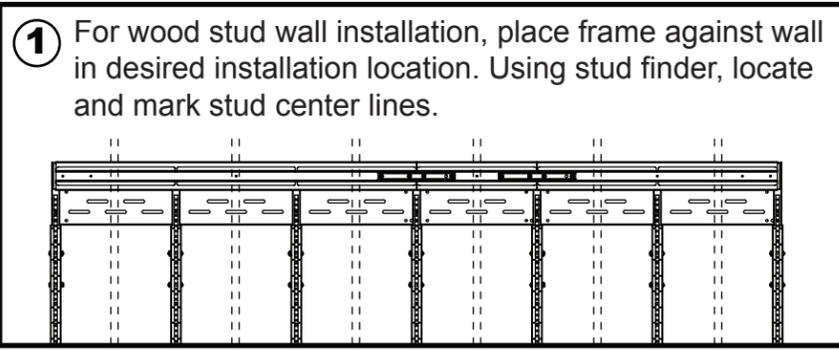

**For anchoring to window mullion:**

**1** Determine locations on window mullion for wall brackets. Use 2x 3/4" Self drilling screws (I) to mount Wall Bracket (A) to window mullion.

Window mullion  
A  
OR  
Self-drilling screws

**2** Thread pre-looped portion of wire through wall bracket. Thread loose end of wire through loop.

**3** Pull wall bracket loop taut and thread metal catch of Gripple (B).

B

**4** Thread loose end through frame and back through metal catch. Pull taut.

Detail of catch and cable.

GRIPPLE

To remove cable from catch, insert key as shown and pull cable out.

Key  
GRIPPLE

**For anchoring to drywall:**

Secure frame to wall through brackets using togglers as shown.

**1** Position frame next to wall. Pre-drill mounting holes with 1/4" bit. Pull fixture away from wall.

Frame  
Wall  
Drill through wall

**2** Drill out holes to 5/8", flip metal flanges of Toggles to 90° and insert. Pull taut, pushing plastic collar into hole and snapping off excess.

Insert Toggles  
Plastic collar  
Turn metal flange 90°  
Drill holes out to 5/8"

**3** Mount to wall using 2x Screws (G) and 2x Flat Washers (F).

F  
G

# POWER MANAGEMENT OVERVIEW

BEFORE PROCEEDING, PLEASE REFERENCE BELOW NOTES REGARDING STEPS TO PROPERLY POWER MANAGE YOUR DISPLAY:

INSTALL POWER MANAGEMENT TRAYS AND POWER STRIPS.


INSTALL HEADER SUPPORT ARMS.

INSTALL HEADERS.

RUN CORDS & PLUG IN HEADERS.

PLUG IN ANY TOBACCO MANUFACTURER SUPPLIED POWER SUPPLIES (IF REQUIRED) AND ROUTE CORDS.

ONCE ALL CORDS ARE ROUTED, SNAP CORD COVERS ONTO HEADER CHANNEL.

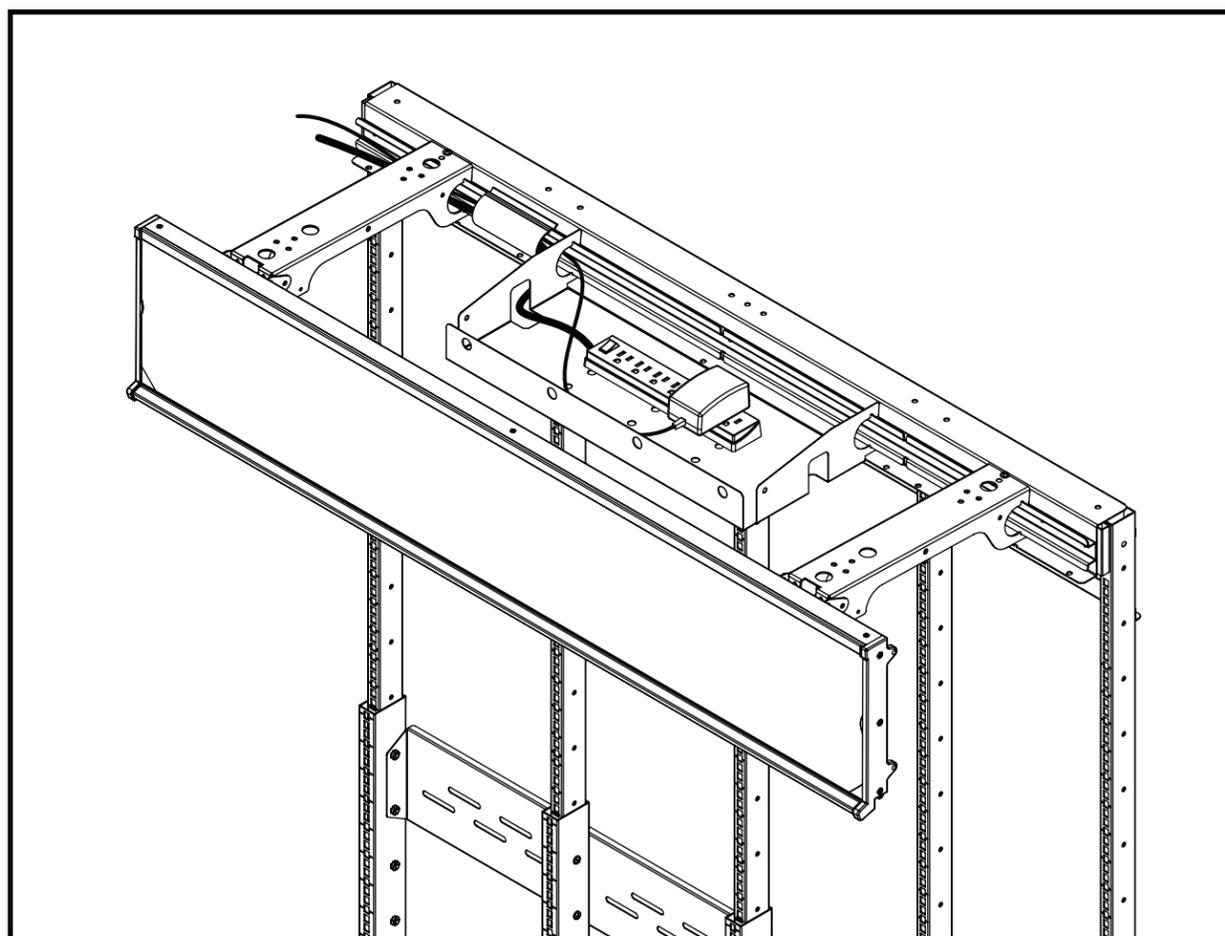


# POWER MANAGEMENT KIT


POWER MANAGEMENT KIT : ITEM# 30205.1  
POWER MANAGEMENT TRAY : ITEM# 30208

Contents:


**A**  
Power Management  
Tray (1)

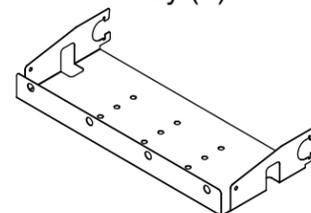


**B\***  
Power Strip (1)

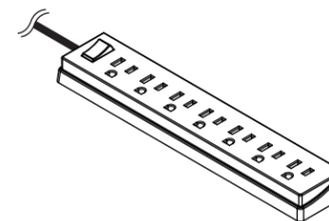

**C\***  
Cord Management  
Covers (5)



**D\***  
Inventory Counting  
Stick (1)

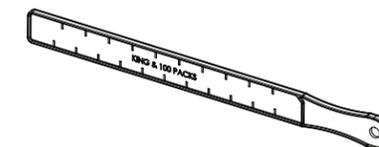


Included in item 30205.1 & 30208


\*only included in item 30205.1

**NOTE:** Specific locations of Power Management Trays are not critical. For optimum power management, space trays evenly along length of entire set.

**1** Install Power Management Tray (**A**) into track notches as shown. Slide tray left or right to secure in place.

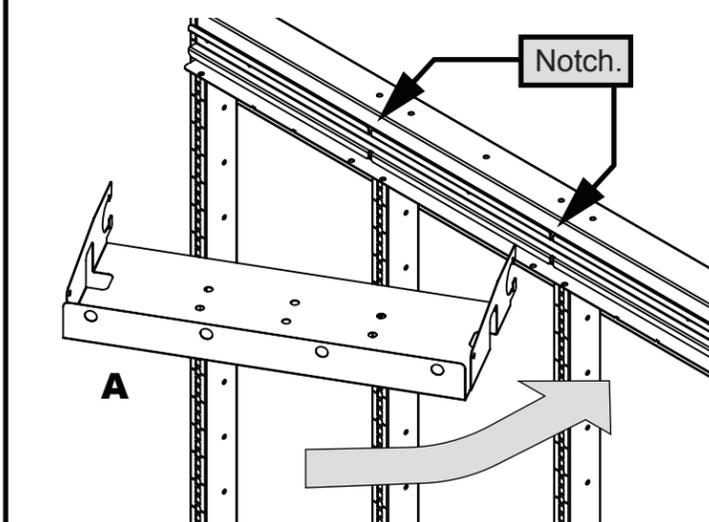

**2** Place Power Strip (**B**) in tray. Feed cables through Power Management Tray as shown.

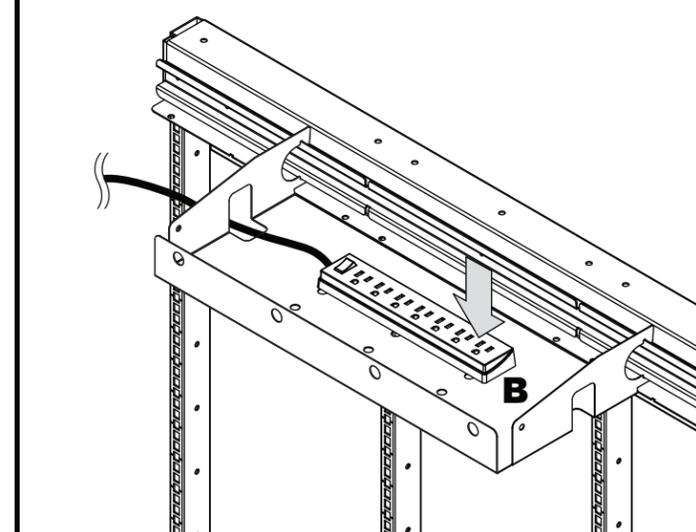


# HEADER SUPPORT ARM


HEADER SUPPORT ARM KIT : ITEM# 30206

**1** Insert Header Support Arms into notch on channel. Slightly rotate to engage channel.


**NOTE:** Support Arms are installed and placed to correspond with headers. Each header requires (2) Support Arms. Refer to your store-specific planogram for header configuration.

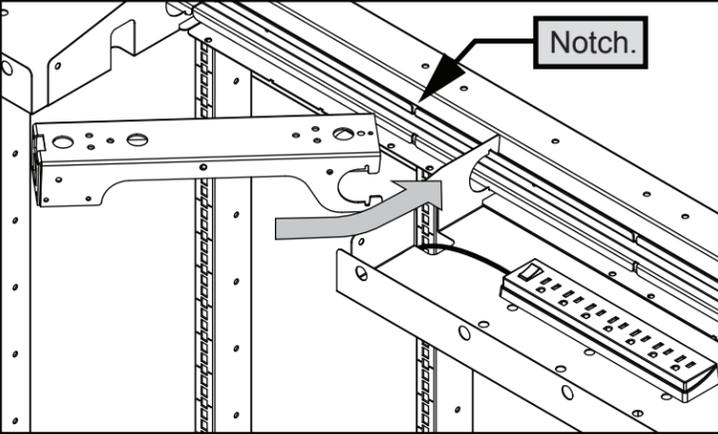


**2** Adjust Header Support Arms by sliding left or right on channel.

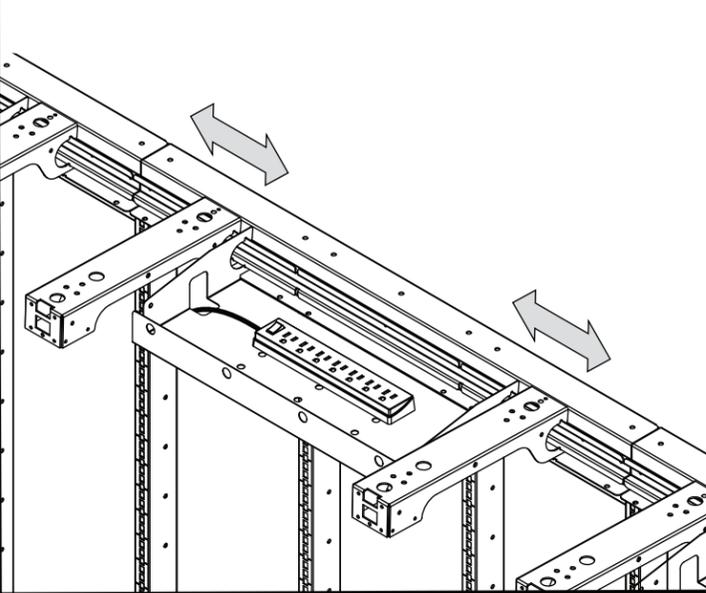


**3** Secure Header Support Arms using 2x 1" Screws. Do not fully tighten.

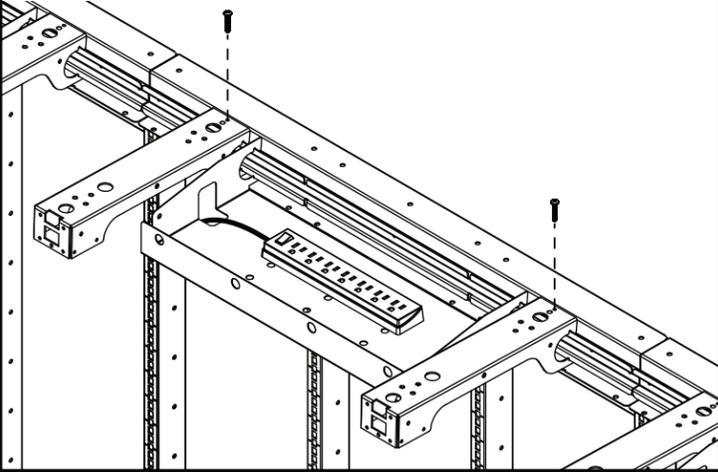


2' Header setup

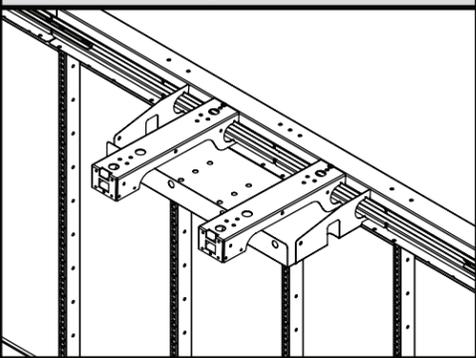

3' Header setup

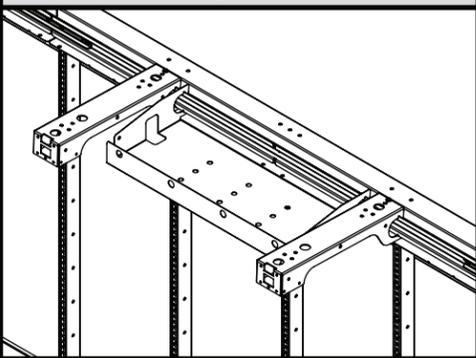

4' Header setup

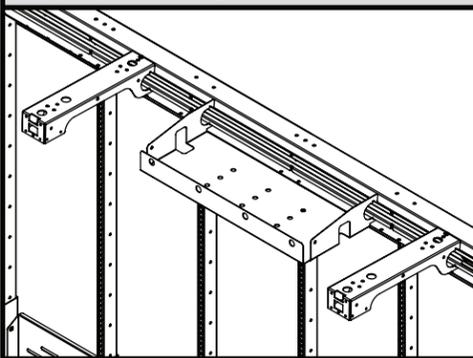

# LED FLIP UP HEADER KIT

★ ACCESSORY ★

LED FLIP UP HEADER KIT : ITEM# 35061

INSTALLED WITH:

2' LED HEADER SIGN : ITEM# 35052.1


3' LED HEADER SIGN : ITEM# 35053.1

4' LED HEADER SIGN : ITEM# 35054.1




IF SET DOES NOT REQUIRE LED FLIP UP HEADER KIT, THEN GO TO PAGE 18, HEADER INSTALLATION.

Contents:

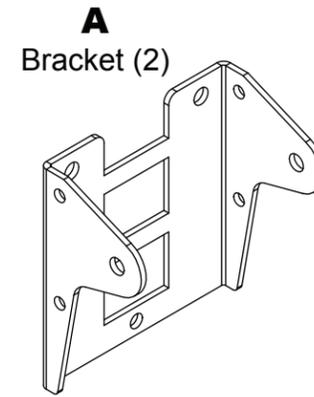


Item# 370805: LED Flip Up Header Hardware Kit


**B** #10-32 x 1/2 Wing Screw (4) **C** #10-32 Wing Nut (4)



**D** #10 Tooth Washer (4) **E** #10-24 x 1/2" Screw (4)



Tools Required:




**F**  
Bumper (2)




## ⚠ WARNING

Unplug and turn off power before installing or servicing. Failure to secure header results in an unsafe condition in which the light header could be knocked off the metal display, resulting in injury. This sign is intended to be installed in accordance with the requirements of Article 600 of the NEC and/or other applicable local codes. This includes proper grounding and bonding of the sign. Dry location installation only.

**1** Secure 2x Bracket (A) onto LED Header (2' shown) using 4x #10-24 x 1/2" screws (E).

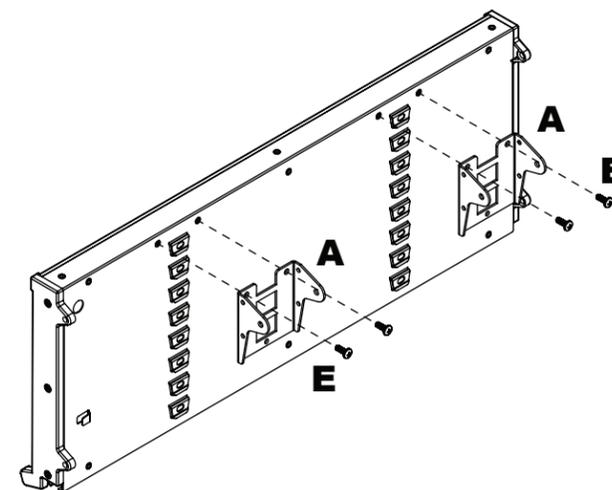


**2** Secure Header onto Support Arms using 4x Wing Screws (B), 4x Tooth Washers (D), and 4x Wing Nuts (C) as shown.

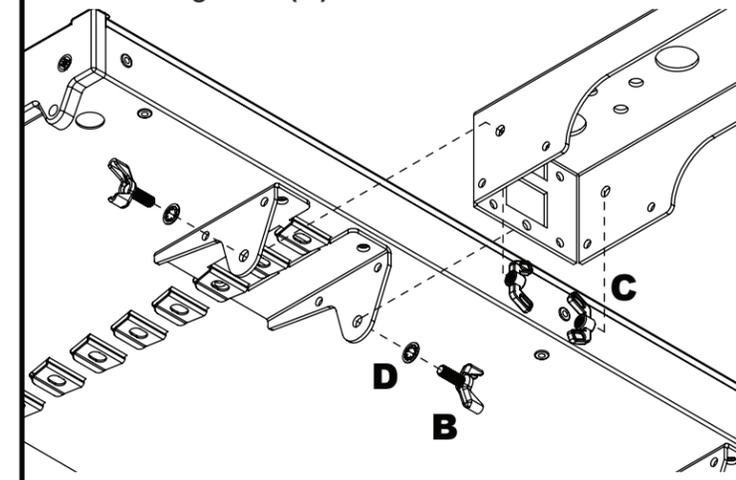


Underside View

**NOTE:** Fully tighten wing nut to slow descent of sign.

3 Secure cord using Twist Ties as shown.

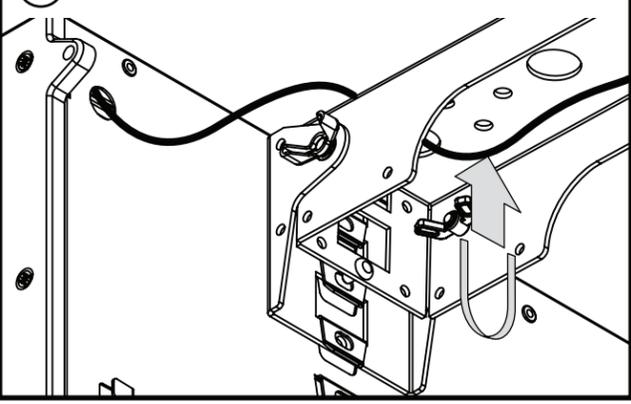



4 Plug LED Header into Power Supply.

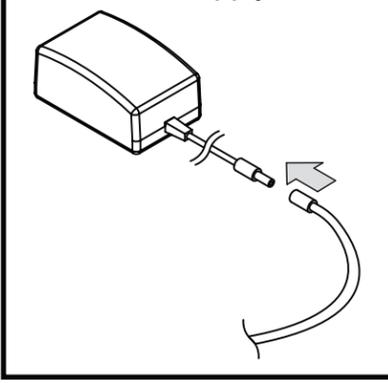



**ELECTRICAL SPECS**

	2' Sign - 1.05A
12V DC	3' Sign - 1.55A
	4' Sign - 1.90A


5 With shelves in place, slide Bumper (F) into channel behind sign.

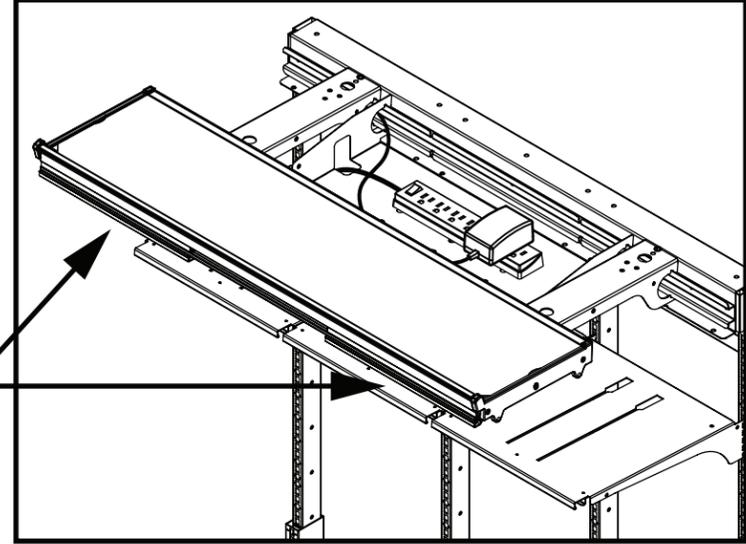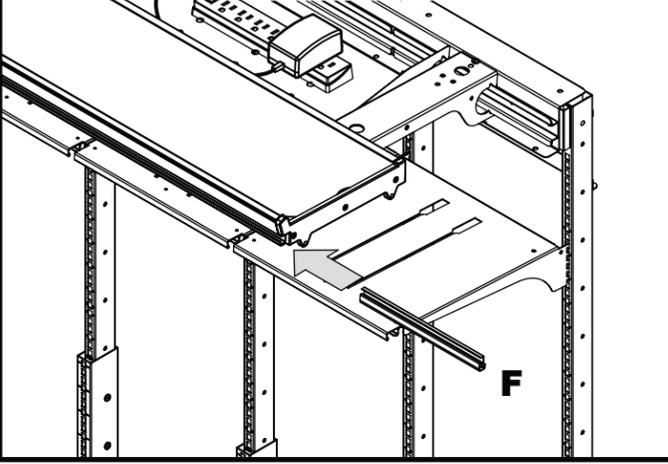


**NOTE:** Shelving align with Bumper (F).

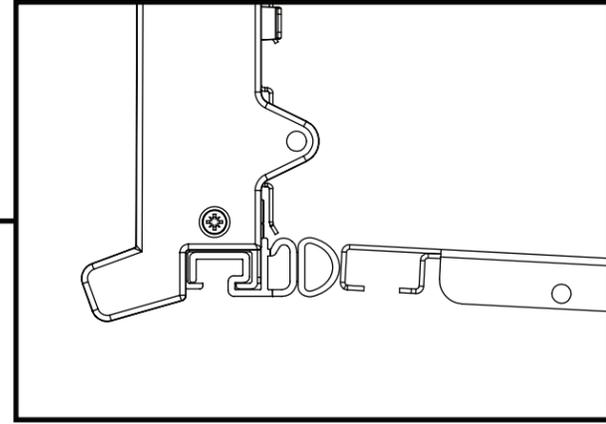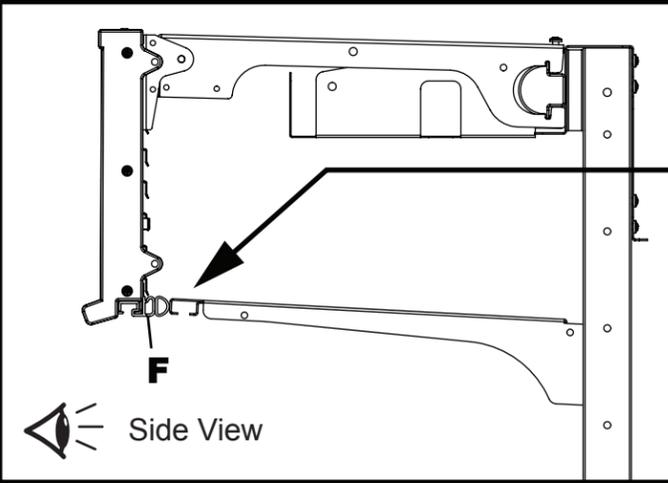


6 To install or replace graphic, lift and remove clear panel from corners as shown. Remove protective film from clear panel. Place graphic, and reinstall panel.

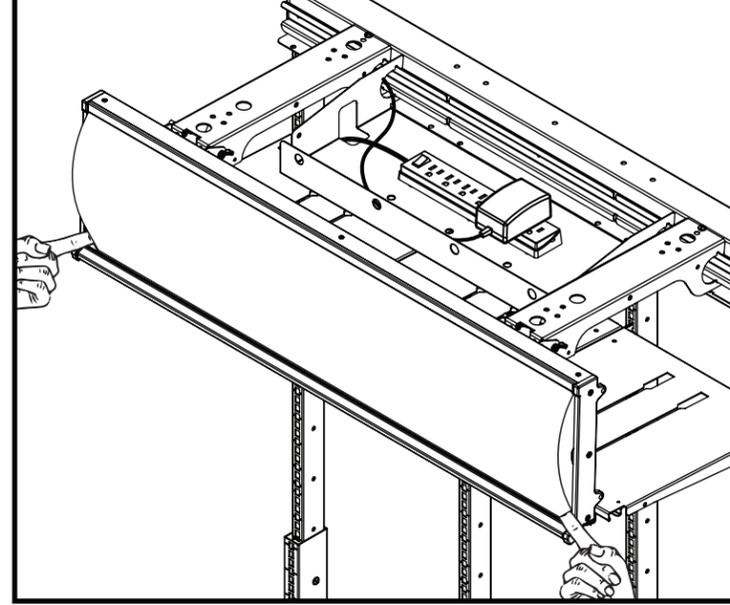


7 When header has multiple graphics require, install graphics and apply vinyl strips to plastic cover over graphic seam. Use narrowest vinyl strip possible.

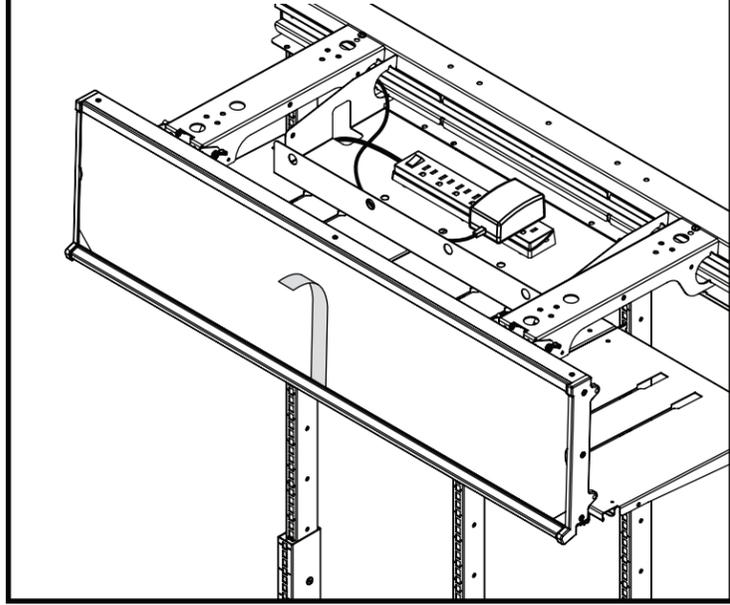

8 Ensure all headers are mounted and positioned appropriately (together).

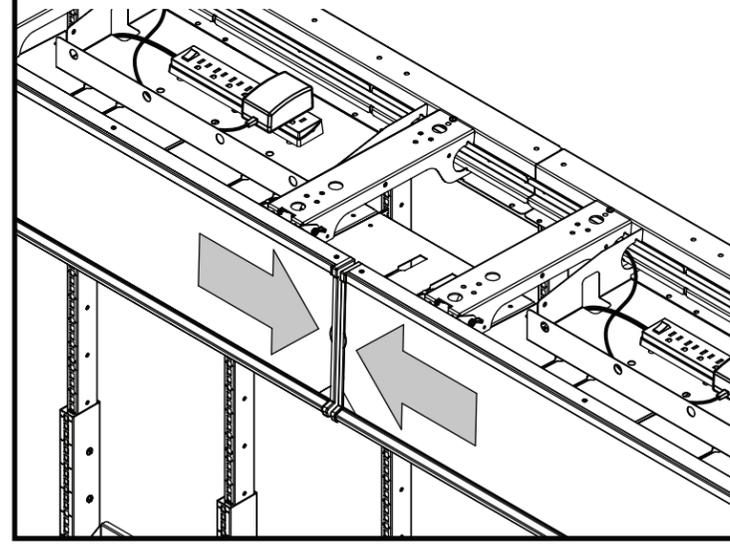

9 Tighten Header Support Arms with 1" Screws (included with Support Arms).

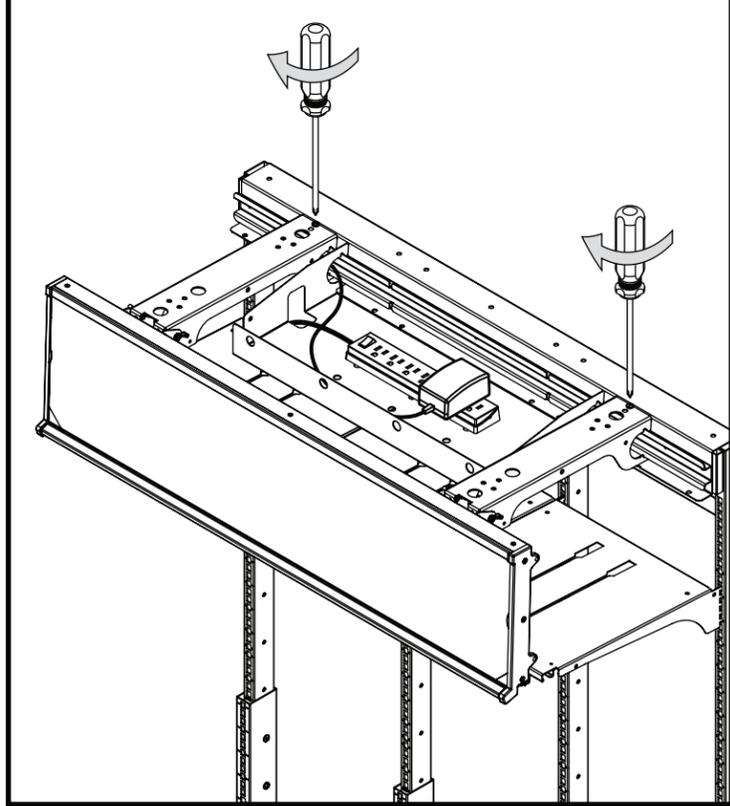


# HEADER INSTALLATION

2' LED HEADER SIGN : ITEM# 35052.1

3' LED HEADER SIGN : ITEM# 35053.1

4' LED HEADER SIGN : ITEM# 35054.1



Contents:

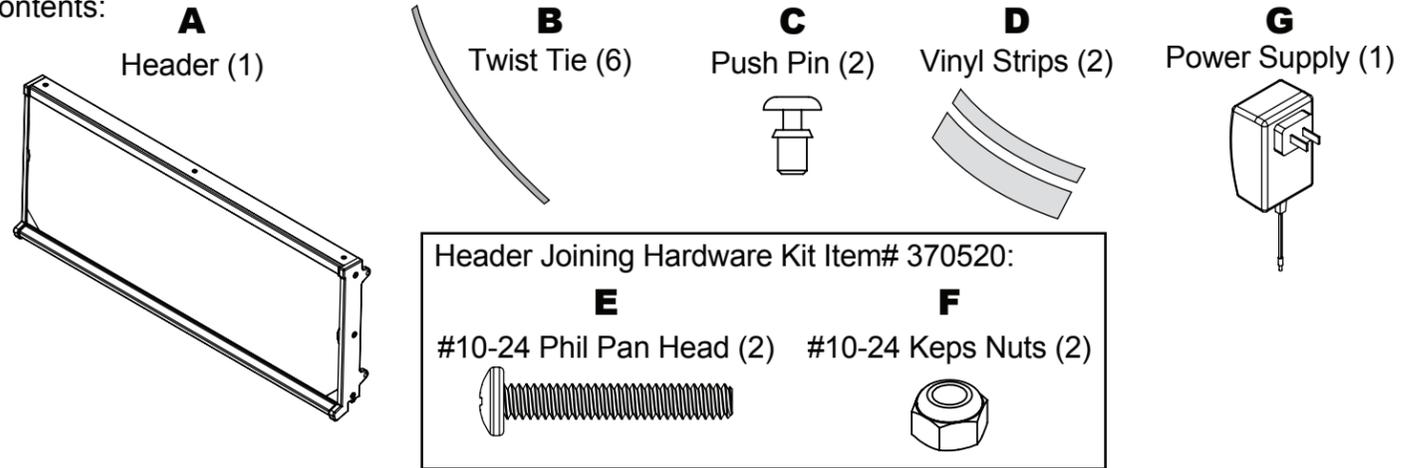


## ⚠ WARNING

Unplug and turn off power before installing or servicing. Failure to secure header results in an unsafe condition in which the light header could be knocked off the metal display, resulting in injury. This sign is intended to be installed in accordance with the requirements of Article 600 of the NEC and/or other applicable local codes. This includes proper grounding and bonding of the sign. Dry location installation only.

**1** Position Header Support Arms in appropriate location for designated LED Header (3' shown). Install Header onto Support Arms.

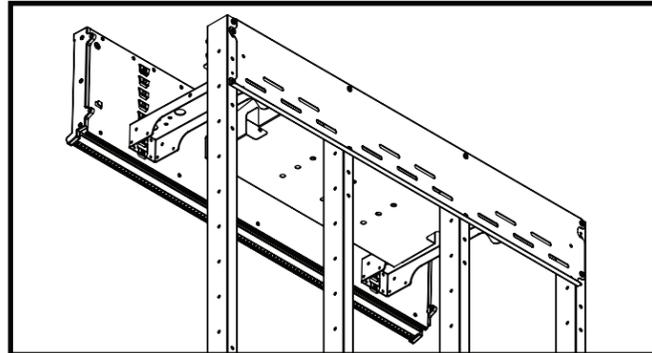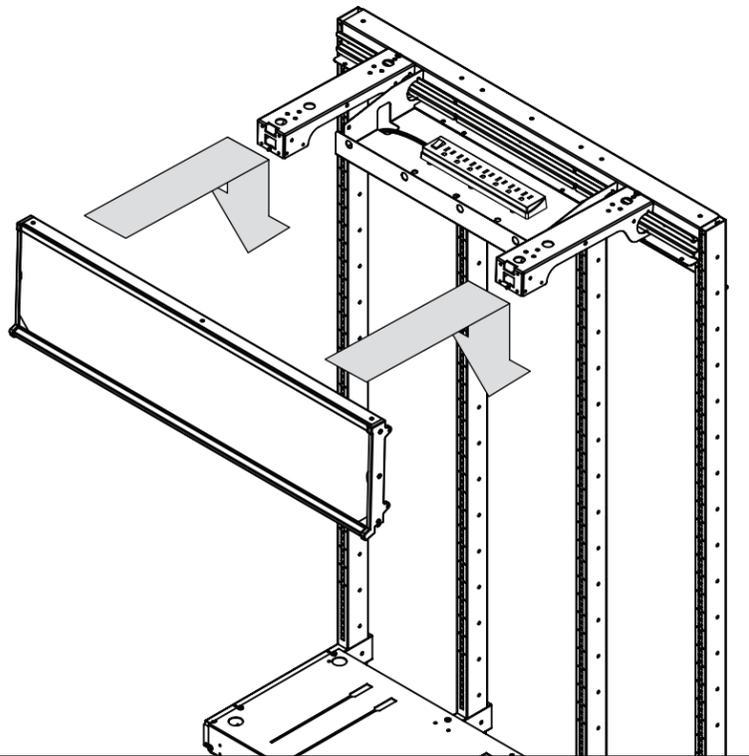


⚠ Highest height configuration.


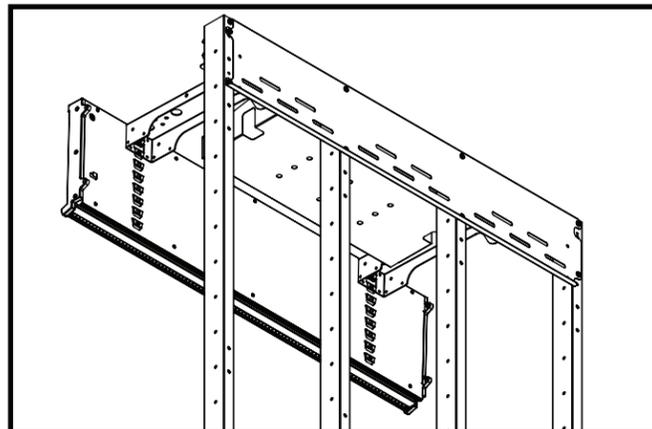


⚠ Lowest height configuration.


**2** Secure Header onto Support Arms using 2x Push Pins (C) as shown.

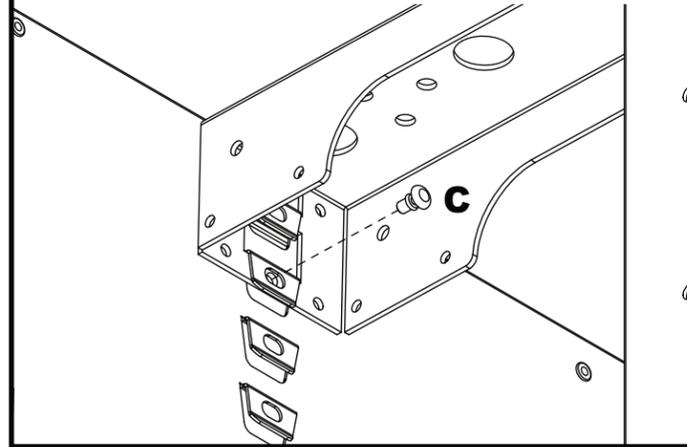


**3** Secure cord using Twist Ties (B) as shown.

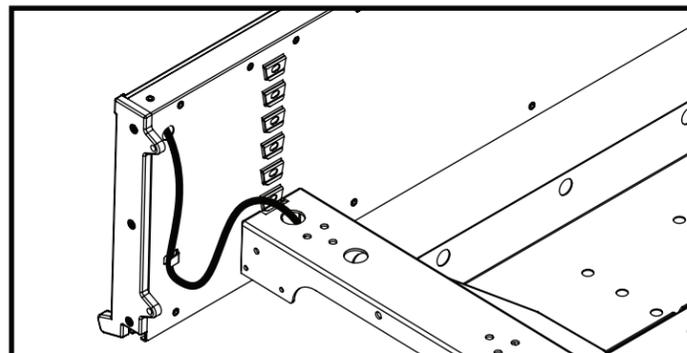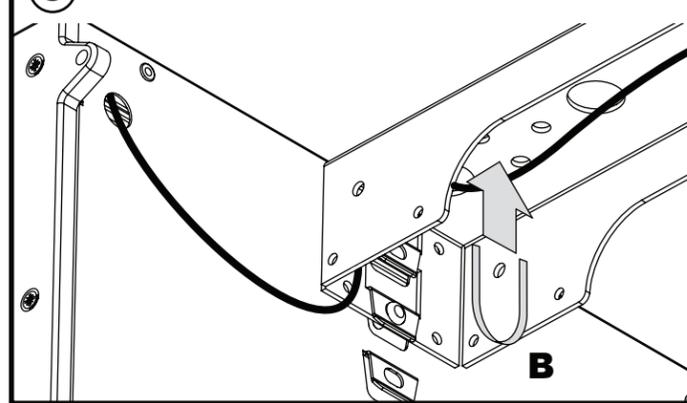


⚠ Highest height configuration.

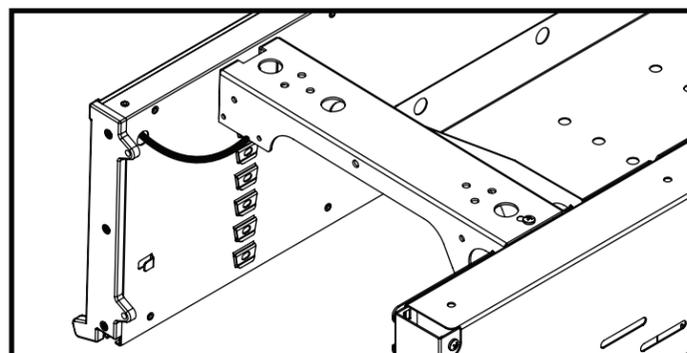

⚠ Lowest height configuration.

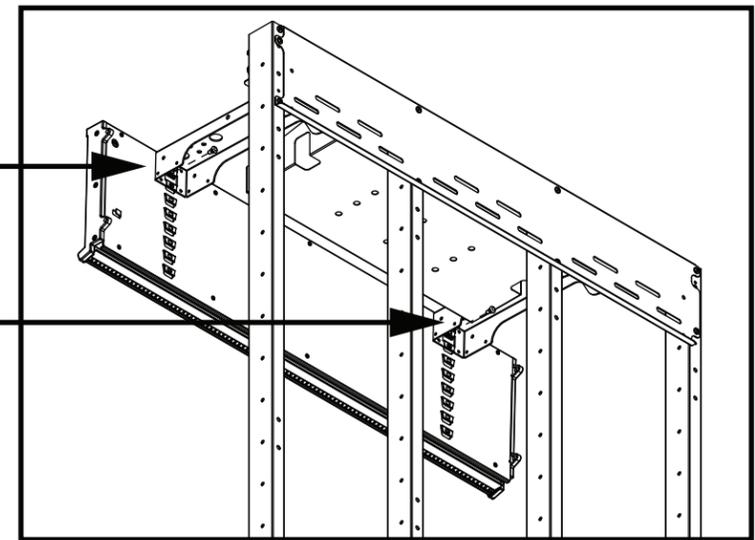


**4** Plug LED Header into Power Supply.

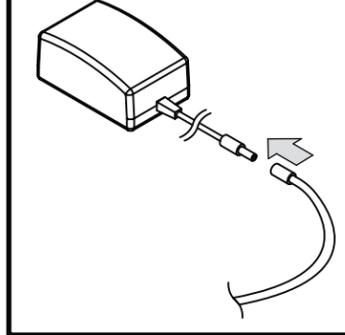

## ELECTRICAL SPECS


12V	2' Sign - 1.05A
DC	3' Sign - 1.55A
	4' Sign - 1.90A

**5** With multiple header assemblies, secure adjacent sign frames using 2x #10-24 Phil Pan Head (E) and 2x #10-24 Lock Nut (F).

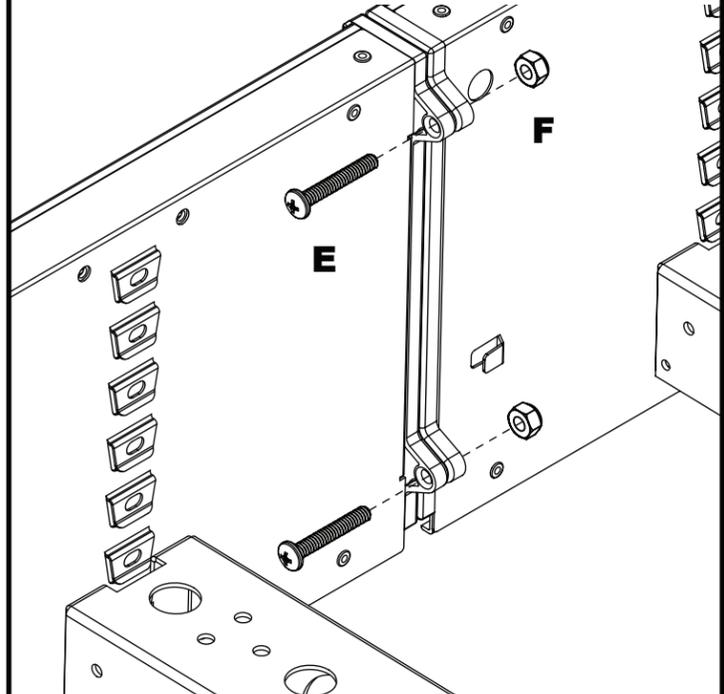


**6** Tighten Header Support Arms with 1" Screws (included with Support Arms).


**NOTE:** Only secure after all headers are installed.

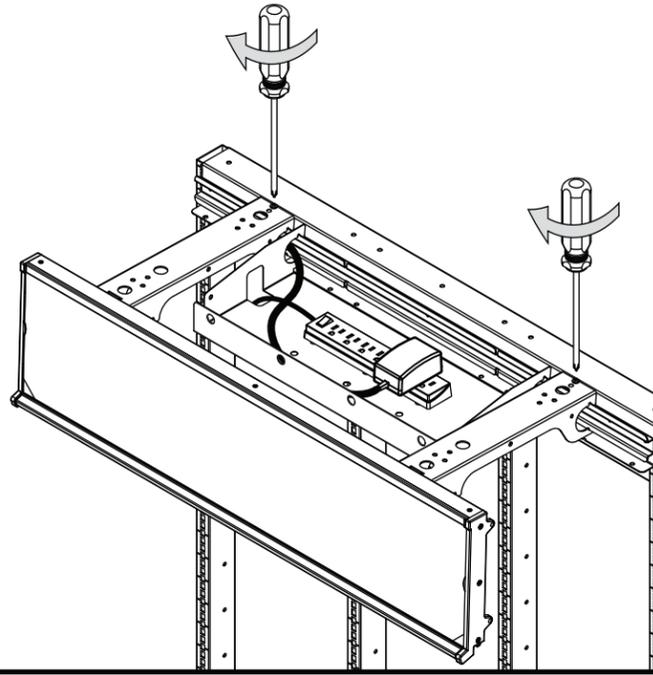


**7** To install or replace graphic, lift and remove clear panel from corners as shown. Remove protective film from clear panel. Place graphic, and reinstall panel.

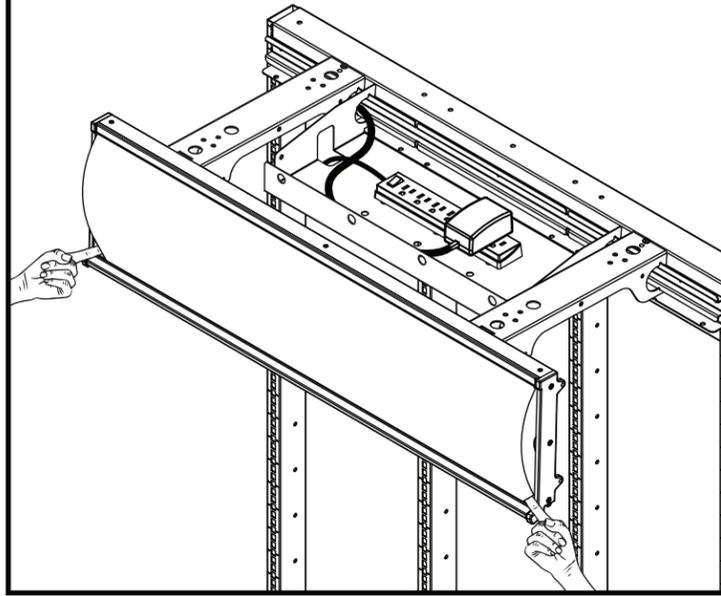

**8** When header has multiple graphics required, install graphics and apply vinyl strips (D) to plastic cover over graphic seam. Use narrowest vinyl strip possible.

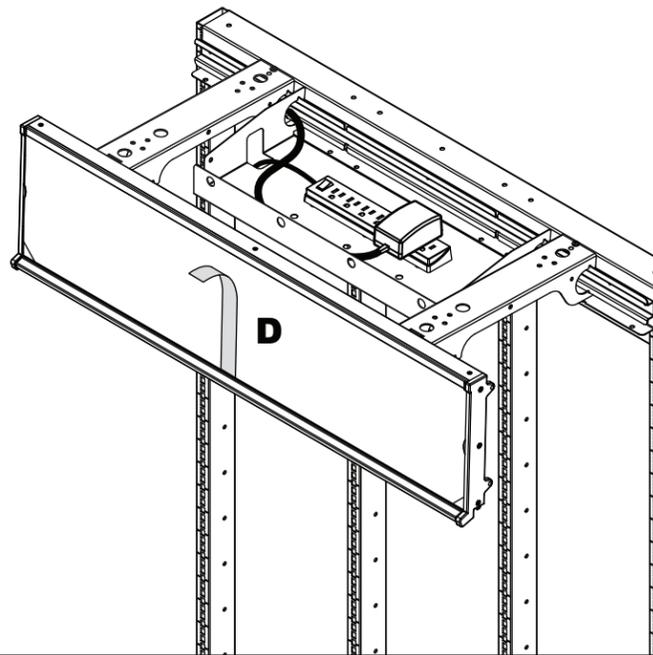

**9** After routing power strip, header cords, and other applicable power cords, install cord covers.

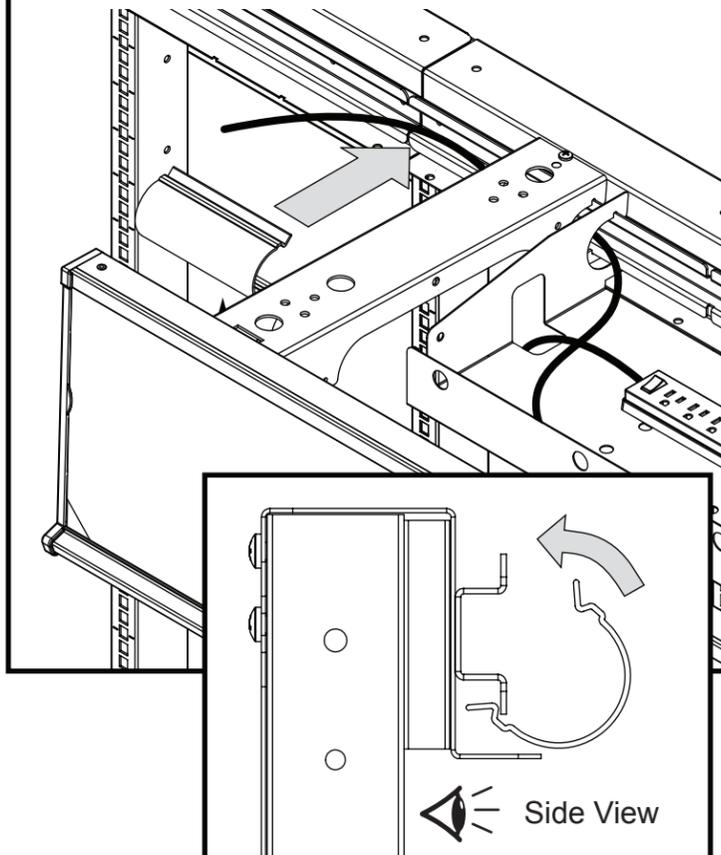

## STORAGE DRAWER




IF SET DOES NOT REQUIRE STORAGE DRAWER, THEN GO TO PAGE 20, TELESPANNER BRACKET.


★ ACCESSORY ★

2FT STORAGE DRAWER : ITEM# 32012  
3FT STORAGE DRAWER : ITEM# 32013  
4FT STORAGE DRAWER : ITEM# 32014

**1** Install Storage Drawer onto lowest position of frame as shown.

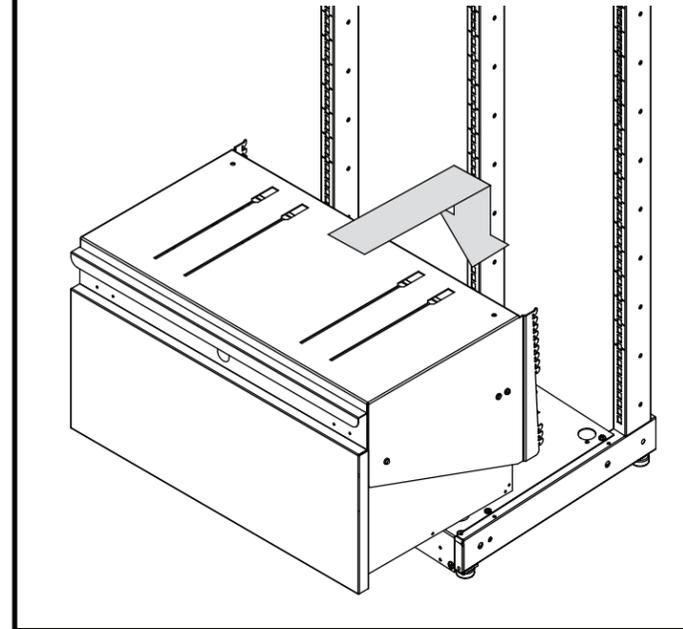

**2** Shelf Molding (Ordered Separately) can be installed into Storage Drawer slots.




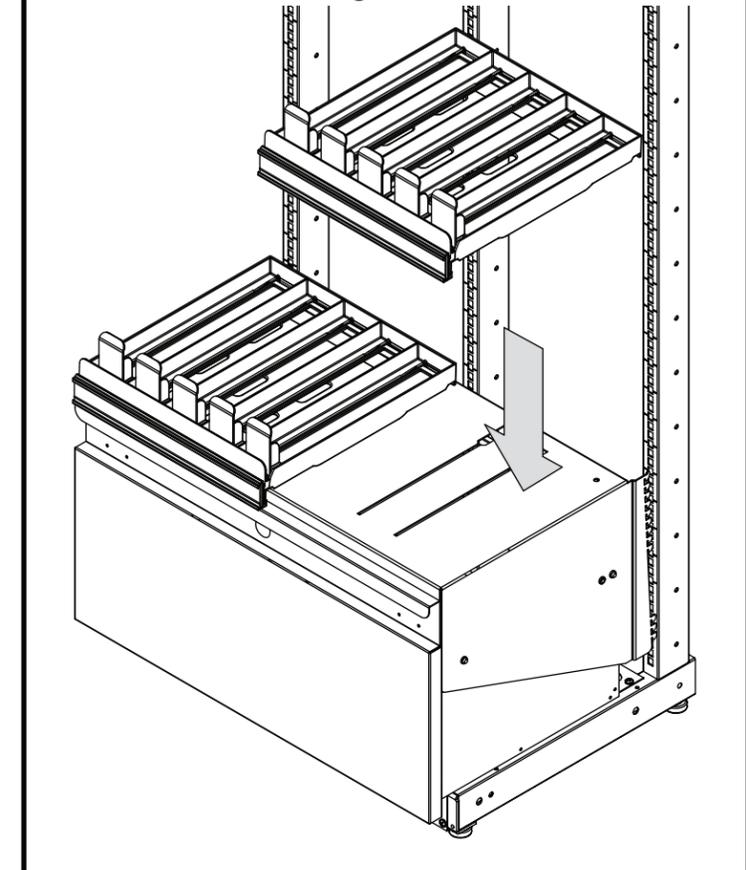


# TELESPANNER BRACKET


OPTIONAL

IF SET DOES NOT REQUIRE *TELESPANNER BRACKET*, THEN GO *SHELF INSTALLATION*.



**NOTE:** Required only when shelving installed over telescoping frame seam.

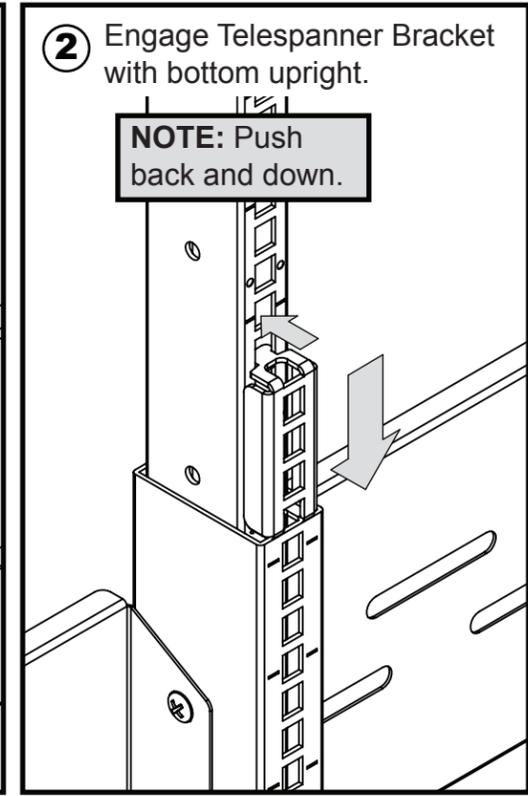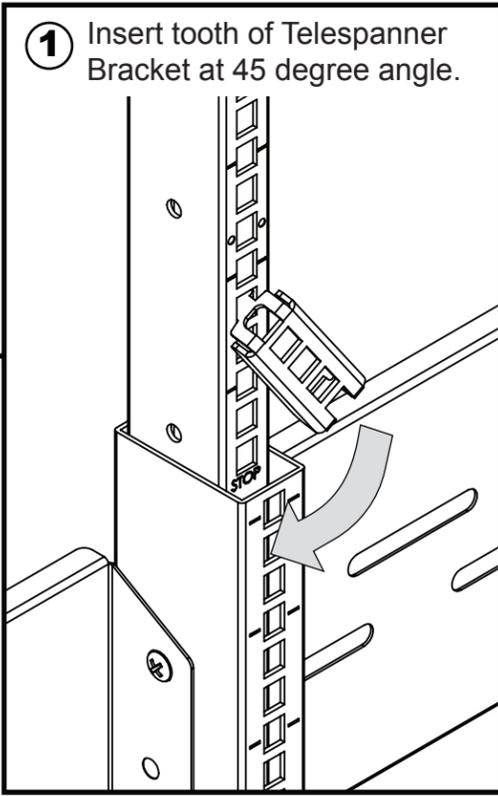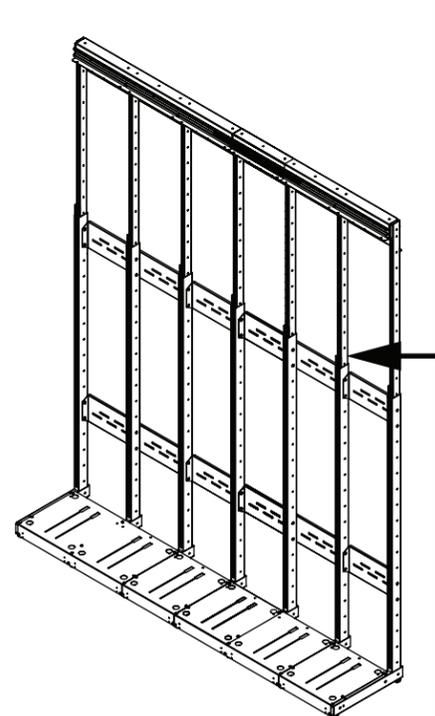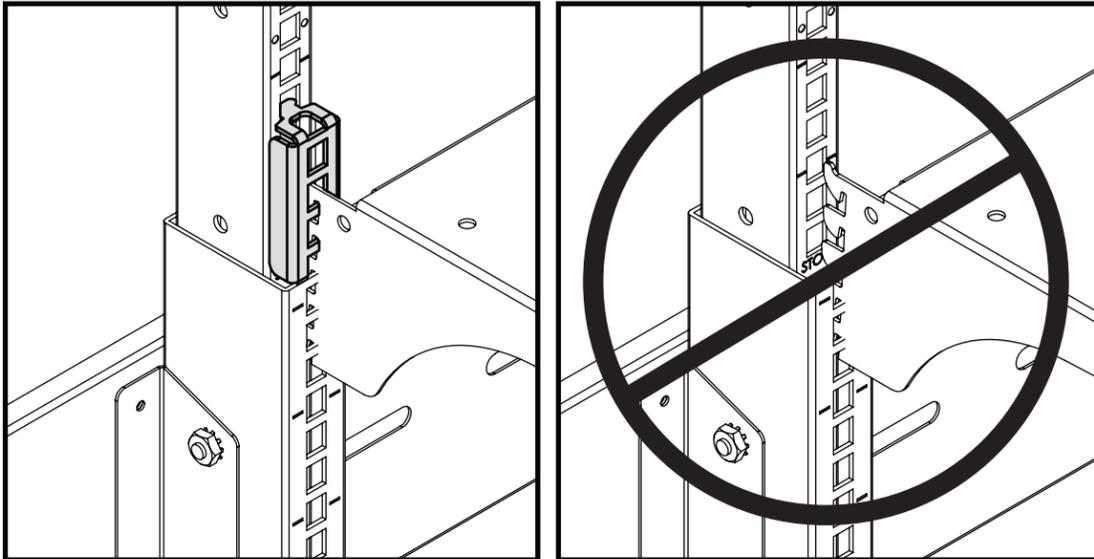

# SHELF INSTALLATION

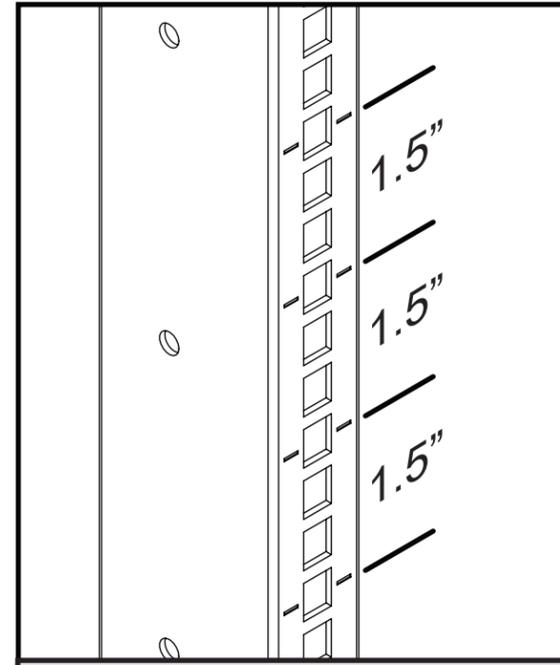

**NOTE:** Use white registration marks to properly gauge shelf location. Registration marks are on 1.5" spacing.

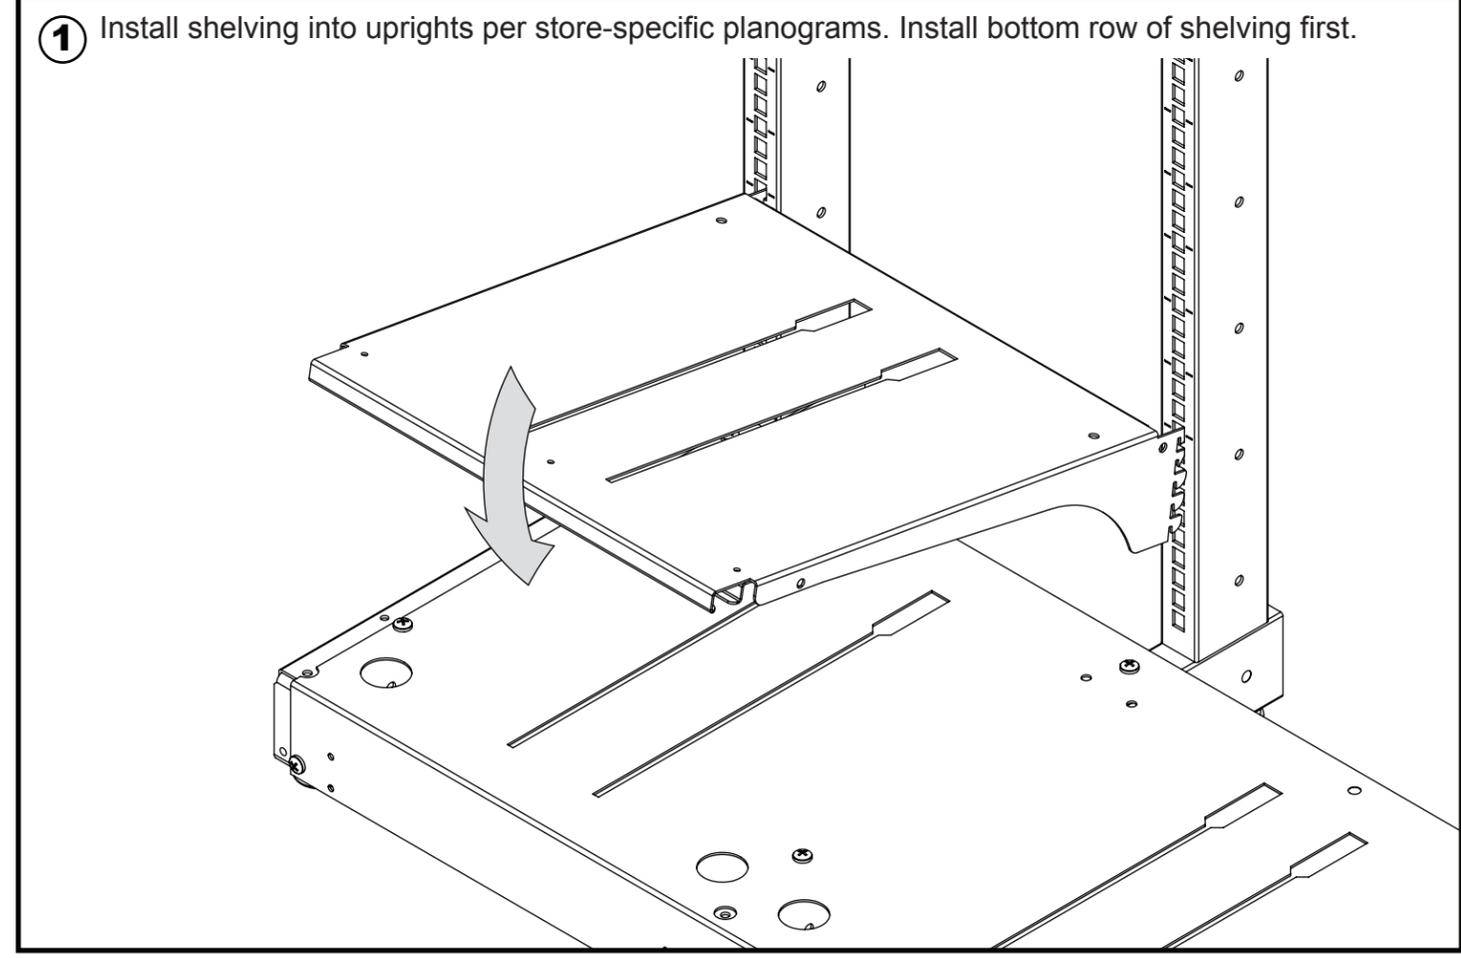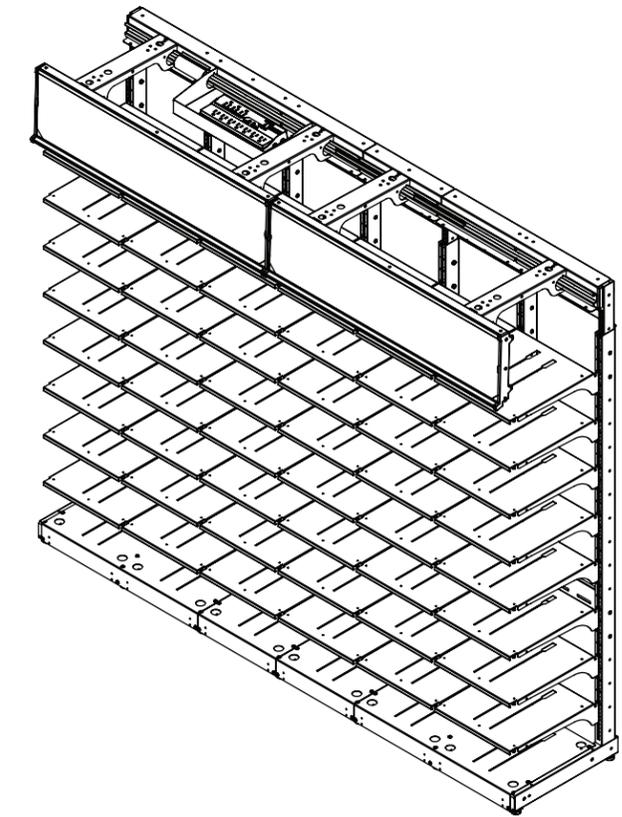

# STORAGE SHELF BACKER


★ ACCESSORY ★




IF SET DOES NOT REQUIRE  
STORAGE SHELF BACKER, THEN  
GO TO PAGE 22, SHELF MOLDING.

STORAGE SHELF BACKER : ITEM# 35062

Contents:

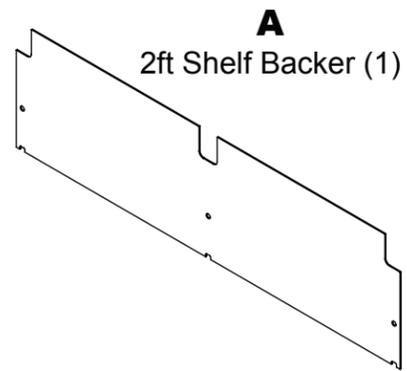


**A**  
2ft Shelf Backer (1)

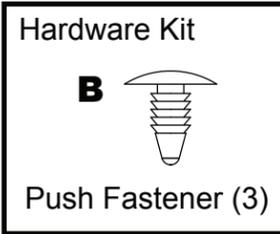

Hardware Kit


**B**




Push Fastener (3)

**NOTE:** Storage Shelf Backer used with LED Flip Headers.


**1** After shelves are in place, install Shelf Backer (A) into frame as shown.

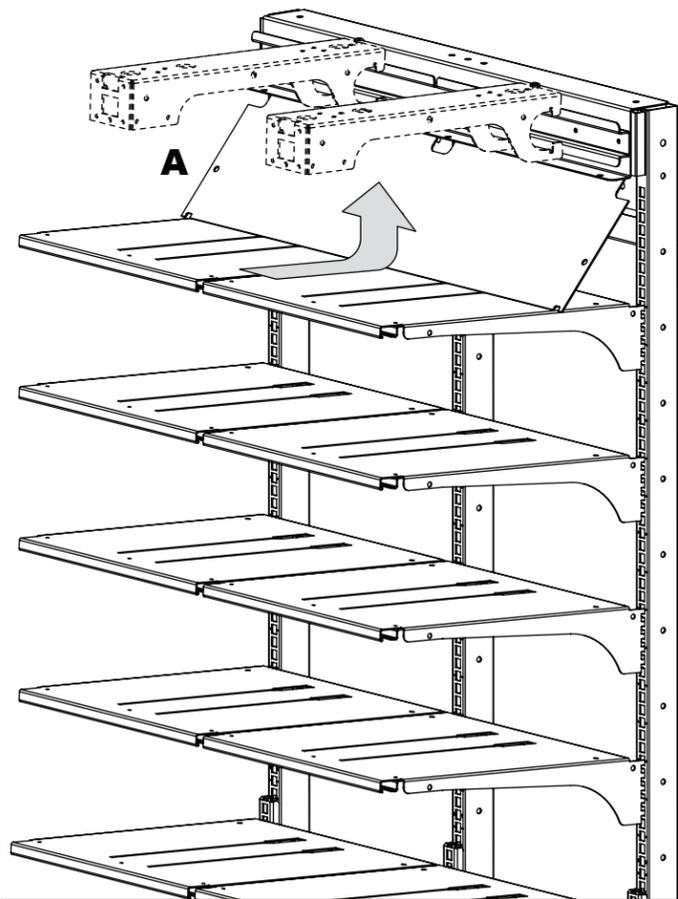

**2** Secure Shelf Backer (A) using 3x Push Fasteners (B).

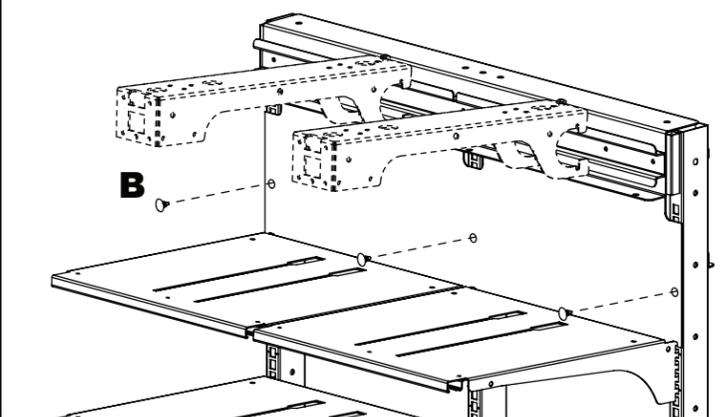



**NOTE:** Overlap Shelf Backers as needed.

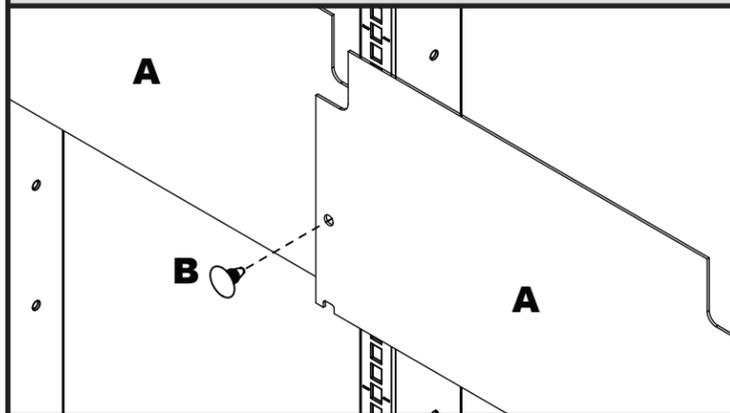


# SHELF MOLDING

**1** Install Shelf Molding per store-specific planogram.

**A**

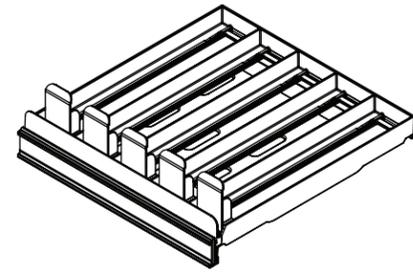
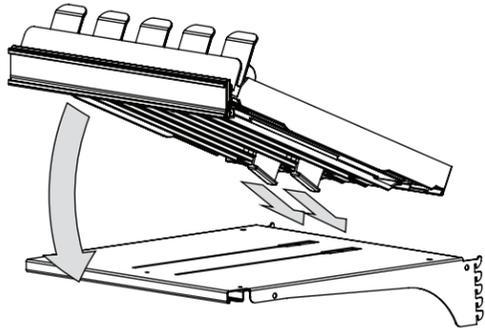


5w Pack Pusher Tray

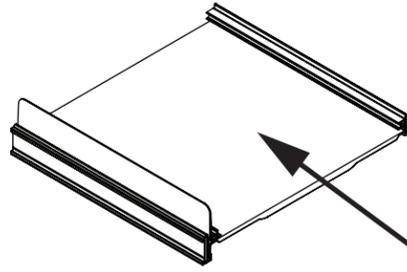


1ft Adjustable Tray  
4 Wide Adjustable Tray  
5 Wide Adjustable Tray


**B**

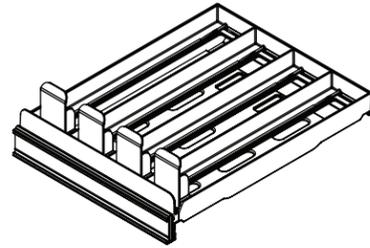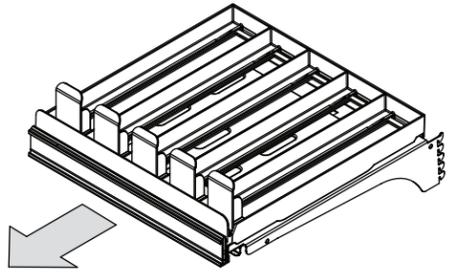


4w Pack Pusher Tray

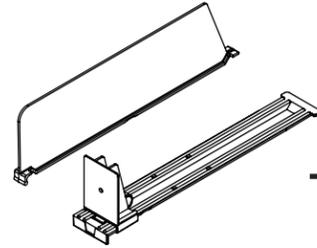

OTP Pusher and Tall  
Divider 10pk

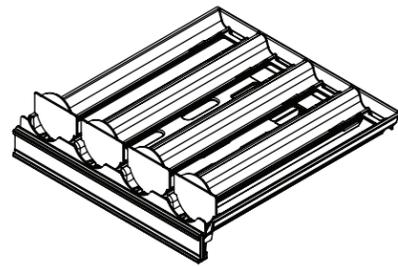


4w Can Pusher Tray

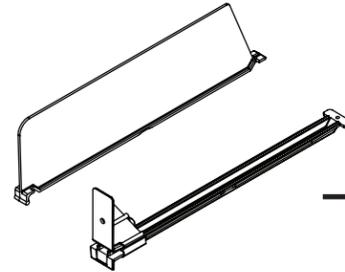

Narrow Pusher and Tall  
Divider 10pk

**2** Shelf Molding can be adjusted by sliding left or right.

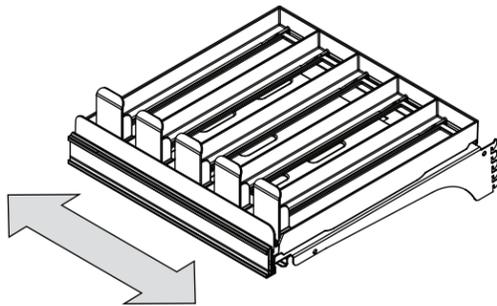

# SHELF CONNECTOR KITS

IF SET DOES NOT REQUIRE *SHELF CONNECTOR KITS*, THEN GO TO *PUSHER INSTALLATION & ADJUSTMENTS* (BELOW).

★ **ACCESSORY** ★

2FT SHELF CONNECTOR KIT :  
ITEM# 36550

3FT SHELF CONNECTOR KIT :  
ITEM# 36555

Contents:

Item# 36550: 2ft Shelf Connector Kit

**A**

2ft Front Shelf  
Connector (4)



**B**


Rear  
Connector (4)



Item# 36555: 3ft Shelf Connector Kit

**A**

3ft Front Shelf  
Connector (4)

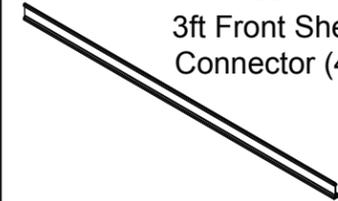


**B**


Rear  
Connector (8)



**1** Slide Shelf Connector (A) onto adjacent trays as shown.

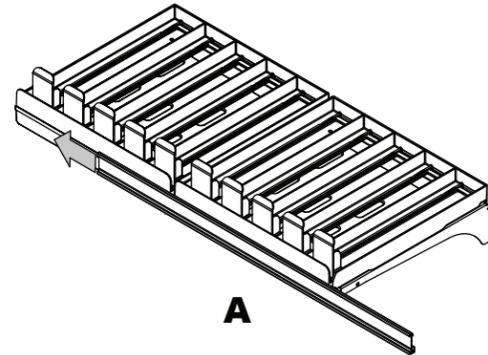


**2** Snap Rear Connector (B) onto back of molding to secure. Connector is to be applied at seam of trays to secure together.

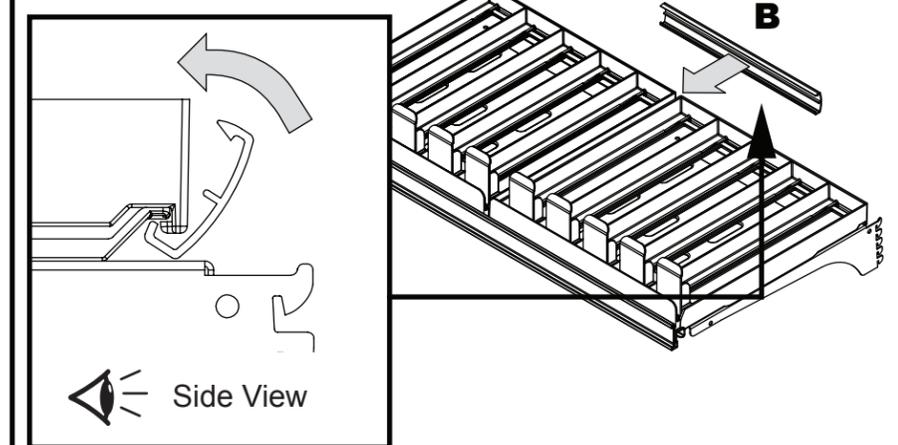

## PUSHER INSTALLATION & ADJUSTMENTS:


**TO INSERT:**

- Place back of divider or pusher into rear channel.
- Push front of divider or pusher into front channel.

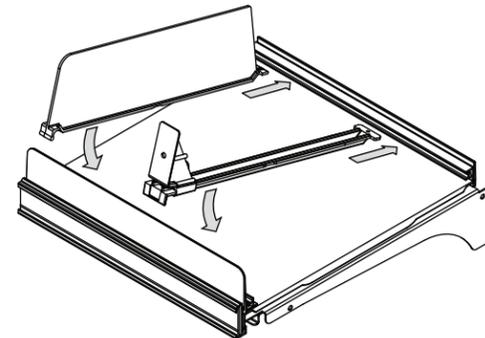

**TO REMOVE:**

- Pull up on front of pusher or divider.
- Pull forward, out of rear channel.

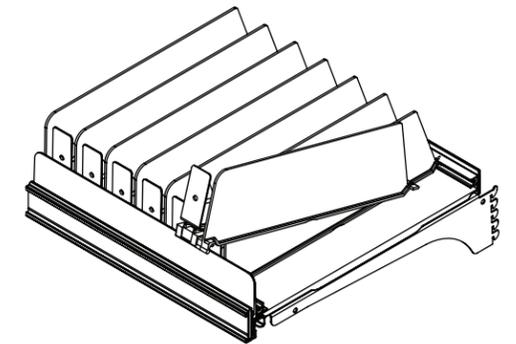

# PLANOGRAM CUSTOMIZATIONS

AS REQUIRED, IF PROVIDED BY TOBACCO MANUFACTURING COMPANIES.

NOTE: SEE SPECIFIC PLANOGRAM(S) LOCATED IN DECOR KIT(S).

NOTE: SOME SIGN SPECIFIC INSTRUCTION(S) LOCATED WITHIN SIGN PACKAGING.

1. ATTACH ALL CHANNELS AND FLIP SIGNS TO FIXTURE. (SEE INSTRUCTIONS IN DECOR KIT(S))
2. WIRE & ROUTE ALL CORDS APPROPRIATELY.
3. INSTALL ALL ADVERTISING CARDS / TRANSPARENCIES.
4. INSTALL ALL PRICERS.
5. TAG PUSHERS WITH PRODUCT SPECIFIC LABELS (IF REQUIRED).

# TOP PANEL KIT




25

IF SET DOES NOT REQUIRE *TOP PANEL KIT*, THEN GO TO PAGE 25, *BLOCKOUT DOOR KIT*.

## ★ACCESSORY★









2FT TOP PANEL KIT : ITEM# 30252  
 3FT TOP PANEL KIT : ITEM# 30253  
 4FT TOP PANEL KIT : ITEM# 30254

Contents:

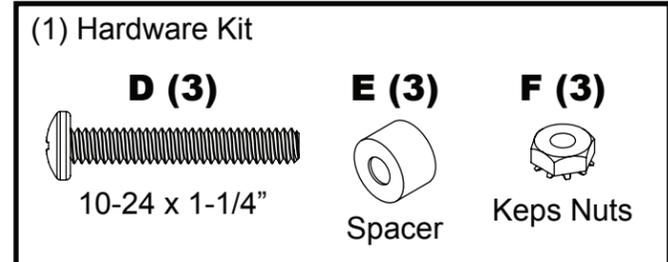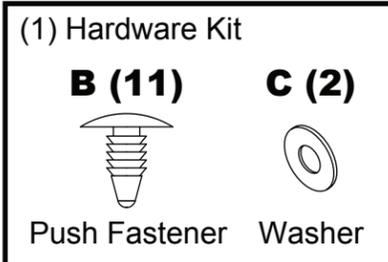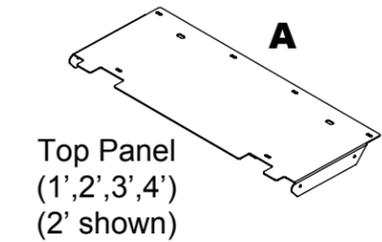

**NOTE:** For Compact Displays, refer to page 22b.

# Compact Display Installation

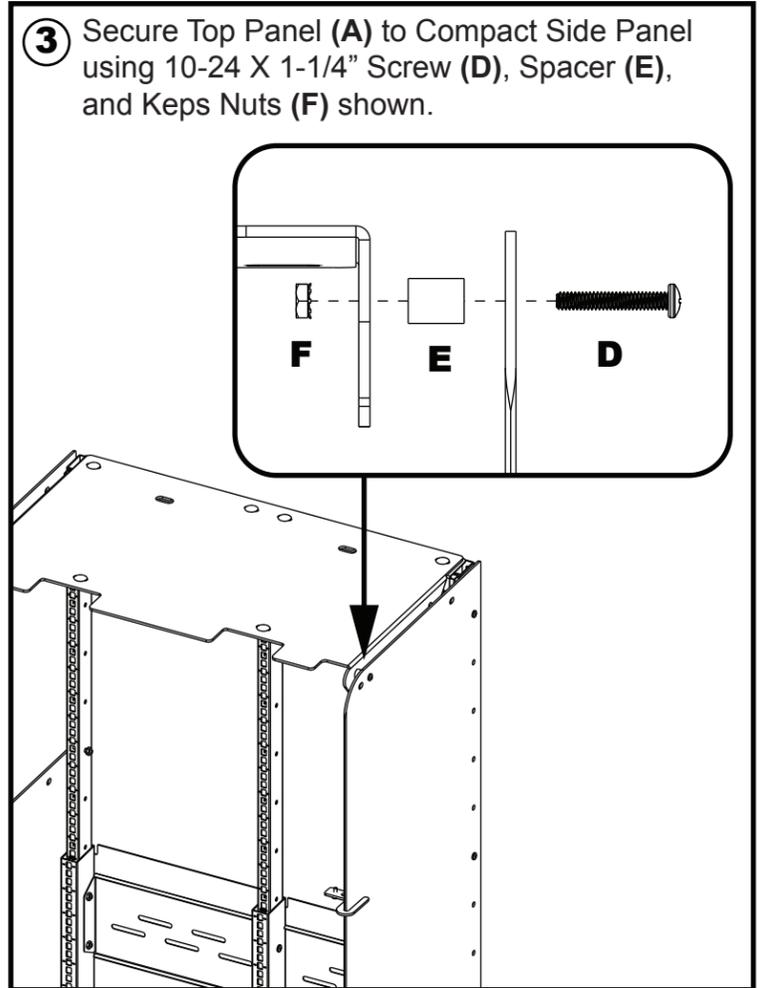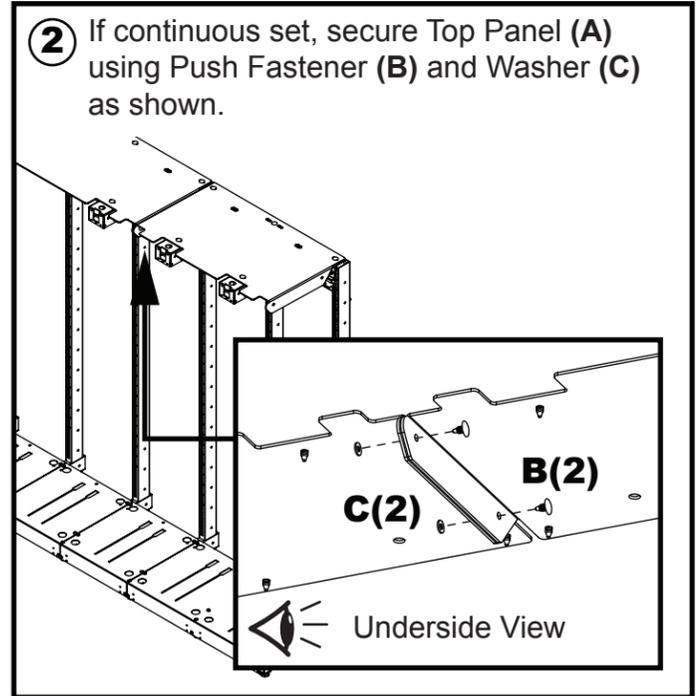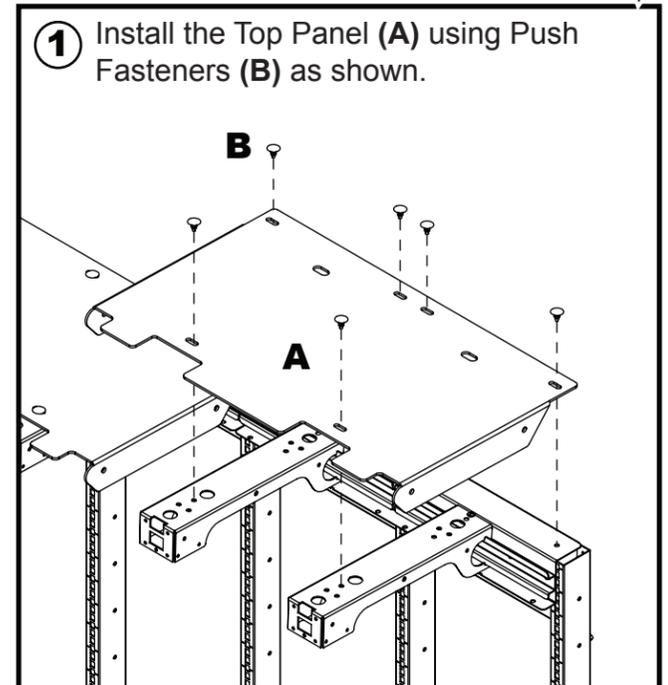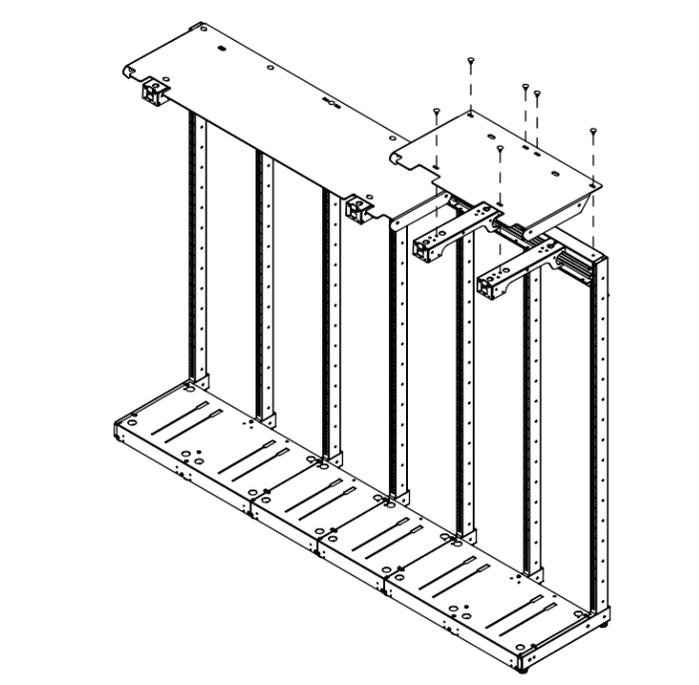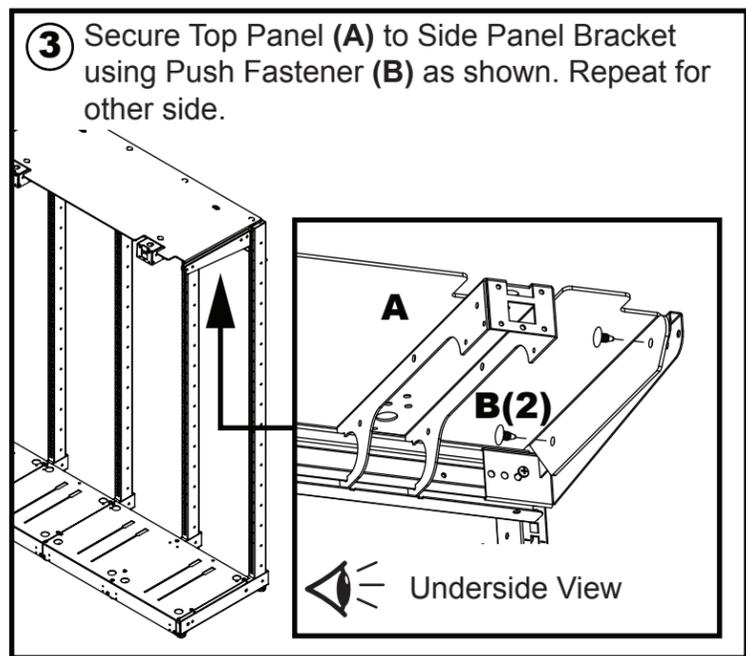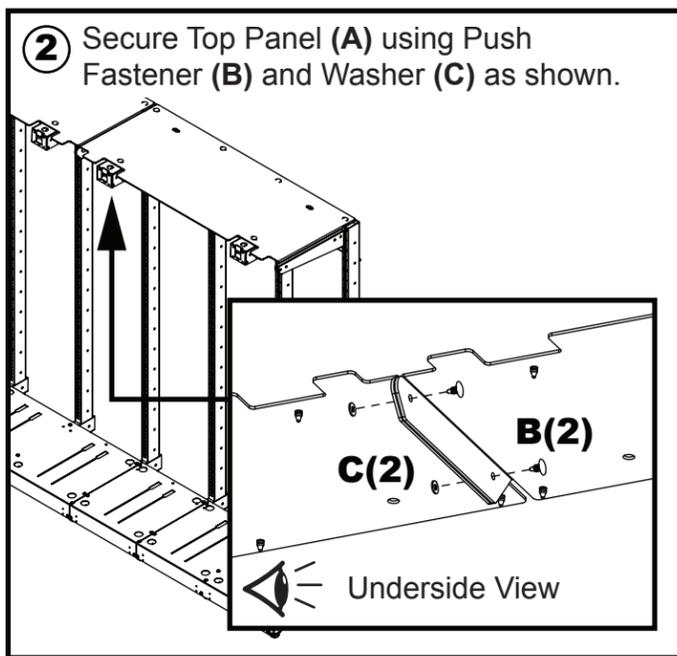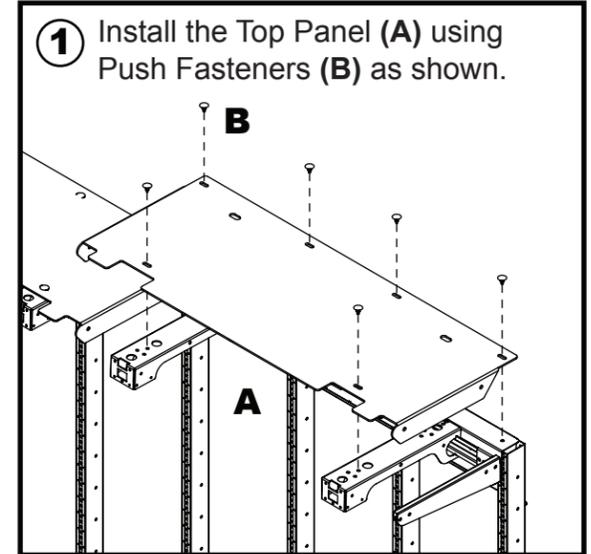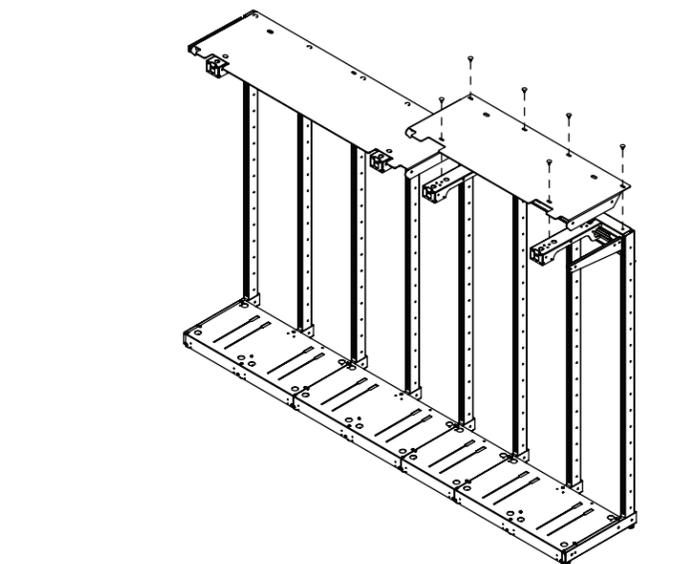

# BLOCKOUT DOOR KIT


26

IF SET DOES NOT REQUIRE **BLOCKOUT DOOR KIT**, THEN GO TO PAGE 26, **INVENTORY COUNTING STICK**.


★ **ACCESSORY** ★

1FT BLOCKOUT DOOR : ITEM# 30228  
2FT BLOCKOUT DOOR : ITEM# 30229


Contents:

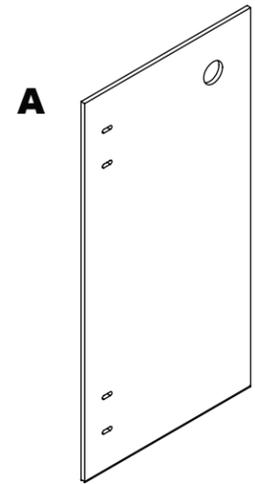


Blockout Panel (1)



J-Channel Hinge (2)



Top Bracket (1)



Bottom Bracket (1)



Bumpers (1)

(1) Hardware Kit




#10-24 x 1/2" Truss Head Screw (5)



Keps Nut (4)



#10-24 x 1/2" Pan Head Screw (2)




Nut Plate (1)




#8-32 x 1/2" Truss Head Screw (5)


**1** Secure Top Bracket (C) onto J-Channel Hinge (B) using (2) #8-32 x 1/2" Truss-head Screws (J) and (2) Keps Nuts (F) as shown.

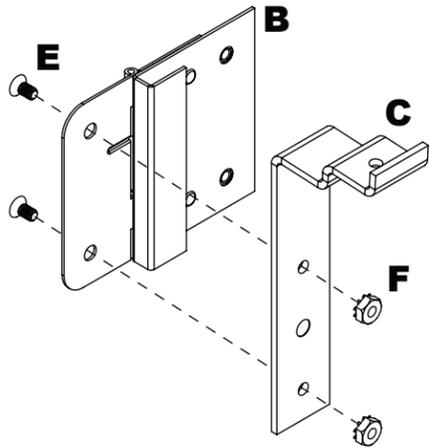


**2** Secure Bottom Bracket (D) onto J-Channel Hinge (B) using (2) #8-32 x 1/2" Truss-head Screws (J) and (2) Keps Nuts (F).

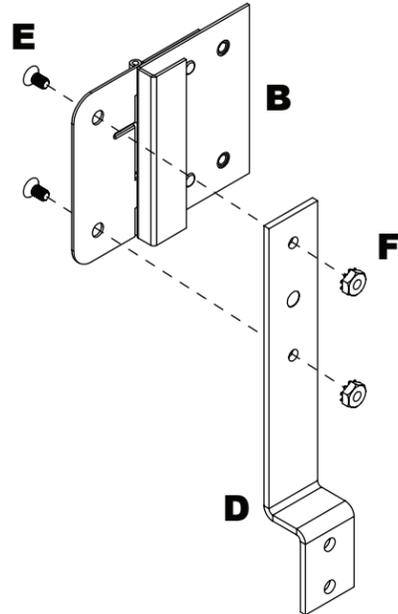

**3** Install Top Bracket Assembly and Bottom Bracket Assembly onto Blockout Panel (A) using (4) #10-24 x 1/2" Truss Head Screws (E).

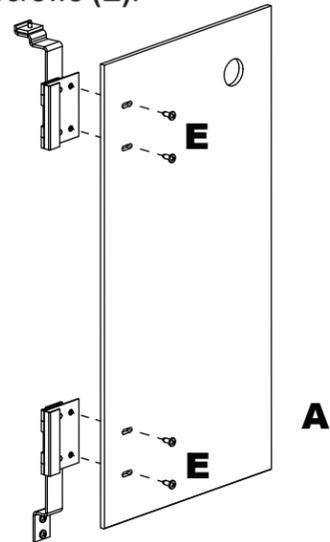


**4** Thread #8-32 x 1/2" Truss Head Screw (J) into Panel Bracket (C) and Nut Plate (H). Do not tighten.

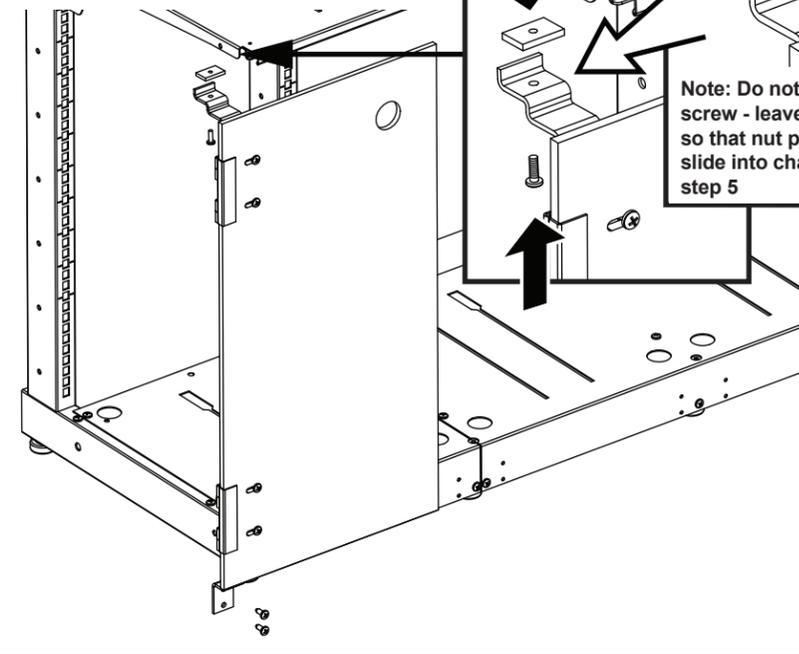

Assembled View


Note: Do not tighten screw - leave loose so that nut plate will slide into channel in step 5



**5** Slide Nut Plate (H) into shelf channel then tighten screw (J) in position.

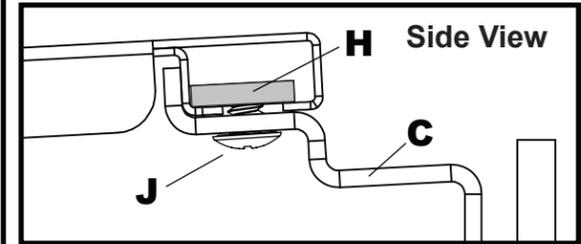

**Note: Installation shows left hand door. Repeat process for right hand by reversing the hinges on the panel (B)**

**6** Secure Panel Bracket (C) onto Frame using (2) #10-24 x 1/2" Pan Head Screws (G) as shown.

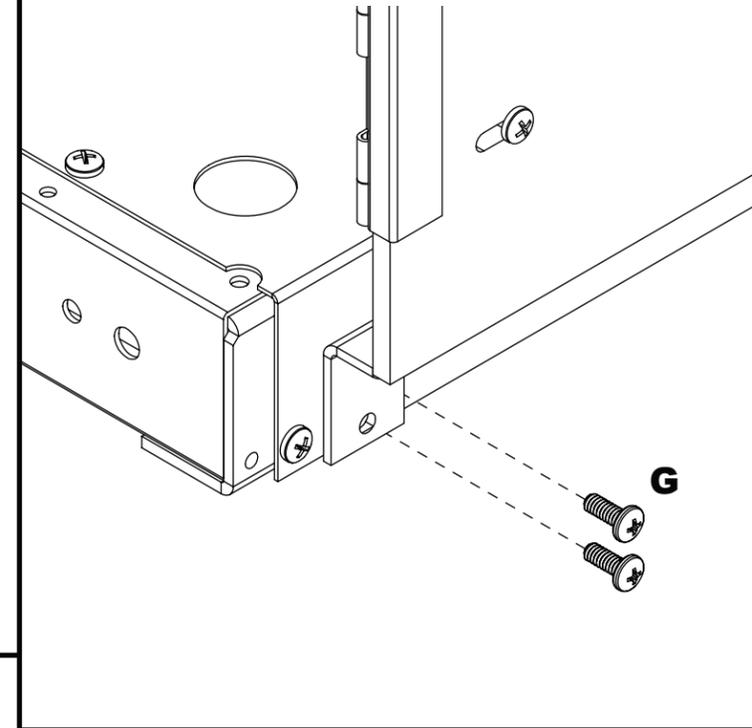

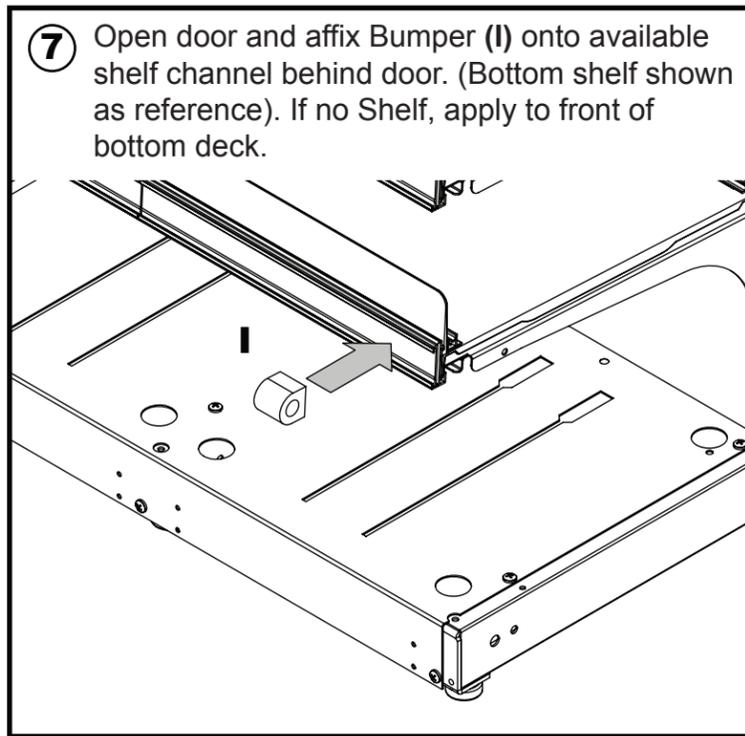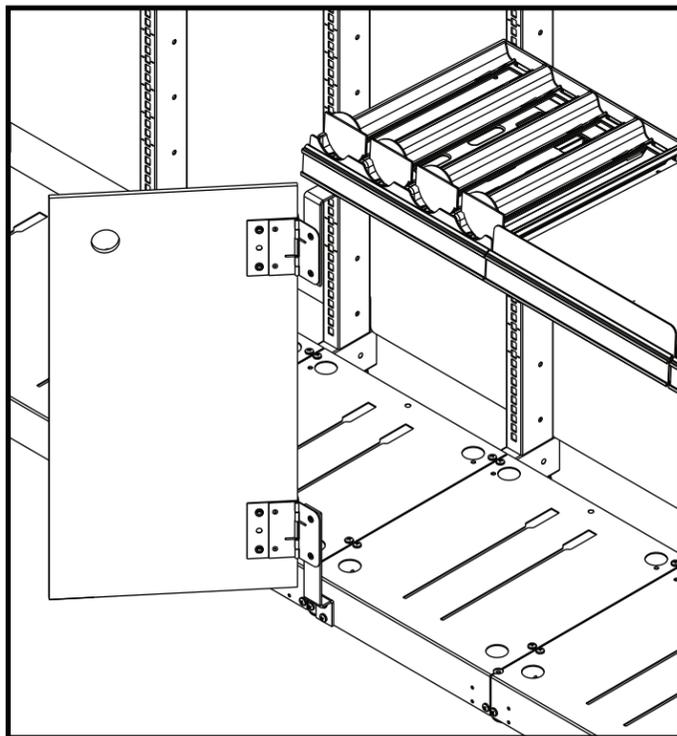

## INVENTORY COUNTING STICKS (PACKED WITH POWER MANAGEMENT KIT)

