

Under Counter Pack Pusher

assembly instructions item #s: 05002, 05003


Part List:


- (1) Housing
- (6) Screws
- (2) "U" Clips


Tools Required: 5/32" Drill Bit Screw Driver Drill

Hanging Application

A. To remove shelf, reach through holes on bottom of housing and pull springs inward to release the tray. Lift shelf out.






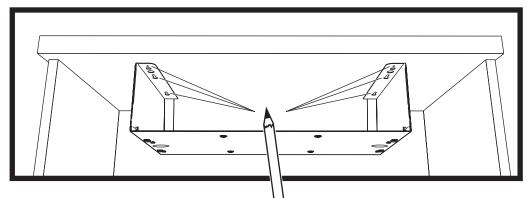


Temporarily position the pusher housing underneath the cabinet in the desired location.


With a pencil, carefully mark holes 1-4 for the keyhole slots. Be sure to mark the holes at the top of the key - see illustrations. Also mark securing holes 5 & 6. Note: Securing Screws must be installed for proper function.

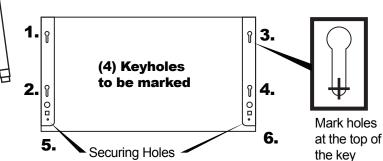


C- Carefully drill starter holes for the (6) wood screws





DUse screw driver to install the (4) screws into holes for keyhole slots. Do not tighten screws completely. Leave aproximately 1/8" gap between screw and surface.






G. Reinstall shelf by placing shelf on slides. Reach through holes on bottom of housing and pull springs inward until shelf drops in place. Release springs.

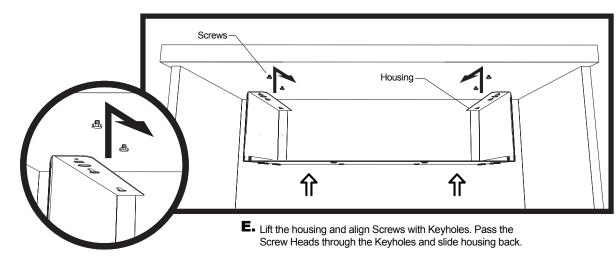

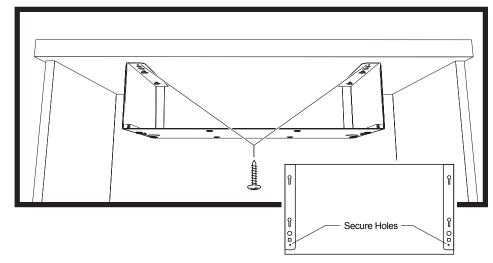




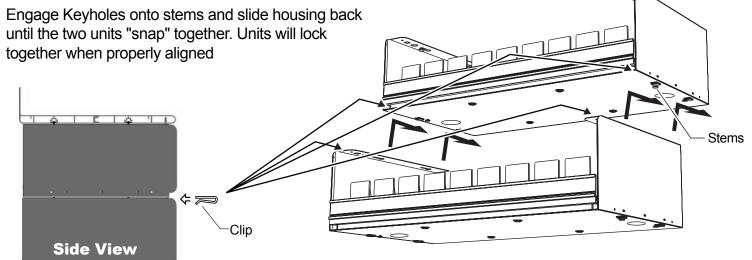

Push on the (2) securing "U" clips to secure the (2) under counter units together.

Non-Hanging Applications

The Unit can sit on a shelf. You can use rubber feet on the housing bottom to help prevent sliding on a surface or you can screw unit onto a surface to prevent sliding completely

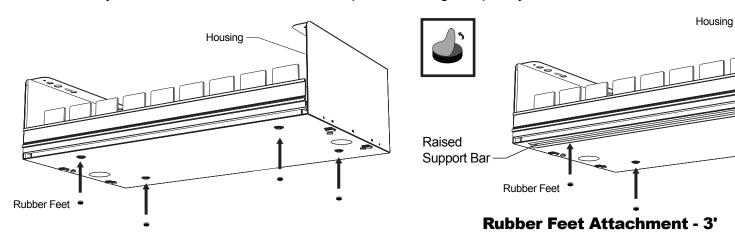



Rubber Feet Attachment - 2'

Remove protective liner on rubber feet and attach to raised areas on bottom of shelf housing.

Screw Attachment

A. Pull Shelf forward to access screw holes in housing. Use these holes to insert screws through housing and into shelf.



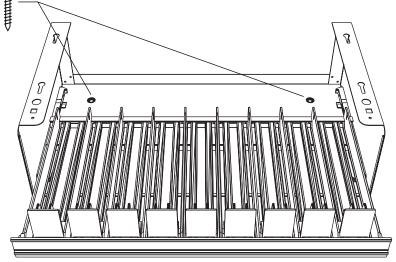

Multiple Units Stacking Application

